

SERENITY 33 – SERENITY SERIES

inches (mm)

66 ¼ x 34 x 25 ¾ (1685 x 865 x 655) • Fax on Demand #1221

SOAKER MODEL #AI33AIR6634TO

AIR BATH MODEL #AI33AIR6634

HOT SOAK MODEL #AI33AIR6634HS



FEATURES (ALL MODELS)

- Deep bathing well
- Slip-resistant floor
- Pre-leveled ABS support base
- Fast-fill waterfall spout
- Center Front drain
- Lucite cast acrylic surface
- Limited lifetime warranty

AIR BATH FEATURES

- Variable speed blower with 20-minute timer
- Air heating system
- Electronic controls with wave and pulse features
- Air channels lined with antimicrobial coating
- Automatic purge and dry cycle with water sensors
- Chromotherapy LED lighting

HOT SOAK FEATURES

- 1.5kW inline maintenance heater
- Quiet run-dry safe pump
- Circulation portal covers
- Pre-leveled ABS support base
- Quiet pad anti-vibration pump mount

AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

COLOR & TRIM OPTIONS

Stock	Premium
Almond	Black
Bone	Cashmere
Linen/Biscuit	Mexican Sand
Sterling Silver	Red
White	Sandbar


OPTIONS

- Comfort pillow: Biscuit, Black, White
- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Factory installed rigid ABS tile flange
- Optional blower/pump location
- Acrylic skirt: Color Matched
- Remote control kit
- Remote blower wiring kit



SERENITY 33

66 1/4 x 34 x 25 3/4 (1685 x 865 x 655)
inches (mm)

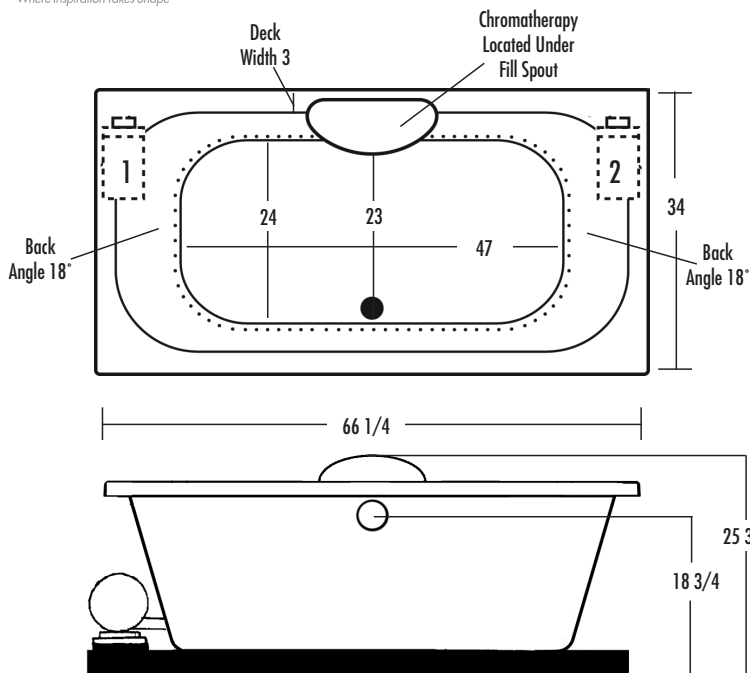

FEATURES lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Air System	Blower	Pump	Heater	Controls	Drain	Pkg. Wt.
Soaker #AI33AIR6634TO	Acrylic	-	-	-	-	-	Center Front	143 (65)
Hot Soak #AI33AIR6634HS	Acrylic	-	-	Run-dry safe	1.5 kW Inline maintenance	Electronic on/off	Center Front	173 (78)
Air Bath #AI33AIR6634	Acrylic	Channel	Variable speed	-	Inline	Electronic	Center Front	183 (83)

DIMENSIONS inches (mm)


Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
66 1/4 (1685)	34 (865)	25 3/4 (655)	-

SUMP DATA inches (mm)

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
85 (322)	-	60 1/4 (1530)	50 1/2 (1285)	26 1/4 (665)	24 3/4 (630)

PLUMBING DIMENSIONS inches (mm)

A	B
1 1/2 (40)	8 3/4 (220)



ELECTRICAL DATA

Component	Specification	Requirement
Blower/Heater (Air Bath)	10.5 AMP; 120 V	15 AMP; 120V, separate circuit; Class A GFCI
Pump (Hot Soak)	1/15 HP; 1.3 AMP; 110 V	20 AMP; 110 V, separate circuit; Class A GFCI
Heater (Hot Soak)	1.5 kW; 12.5 AMP; 110 V	

NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 20 (405 x 510) minimum access required at pump/blower location(s).

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.