$76 \frac{1}{2} \times 76 \frac{1}{2} \times 33 \frac{1}{4} (1940 \times 1940 \times 845) \bullet Fax on Demand #1194$

MODEL #AI9MIL7700



AQUATIC ADVANTAGE

- National distribution
- 5 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

COLOR & TRIM OPTIONS

Stock	Premium
Almond (C, M) Bone (C, M) Linen/Biscuit (C, M) Sterling Silver (C, M) White (C, M)	Black (C, M) Cashmere (M) Mexican Sand (M) Red (M) Sandbar (M)

C = Color Matched Trim

M = Metallic Trim (Brushed Nickel, Chrome, Polished Brass)













FEATURES

- 24 hydrotherapy jets: shiatsu & rotary (12), fan-style (2), pressure-plus foot/knee (6), pressure-plus wrist/elbow (4)
- 2 pulsating neck jet pillows:
 Biscuit, Black, White
- 2 independent, 2hp pumps
- Digital electronic controls
- Shiatsu electronic control with pre-programmed jet sequencer
- Universal remote
- 4kw inline heater
- Air bath system:
 - Variable speed blower
 - Air heating system
 - Automatic purge and dry cycle with water sensors
 - Water-level activated dry cycle
- Fast-fill waterfall spout
- Chromatherapy
- 2 reclining lounge seats
- Sculpted armrests and footrests
- Slip-resistant floor
- Adjusta-level base
- Quiet pad anti-vibration pump mount
- Center drain
- Lucite cast acrylic surface
- Limited lifetime warranty

OPTIONS

- Cable drive waste & overflow: Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color Matched (Biscuit, Bone, White)
- Available Without Fast-fill Waterfall Spout



Millennium Series • Fax on Demand #1194

MILLENNIUM 9

 $76 \frac{1}{2} \times 76 \frac{1}{2} \times 33 \frac{1}{4}$ (1940 x 1940 x 845) inches (mm)











This unit has a ¾" female waterfall fill spout connection.

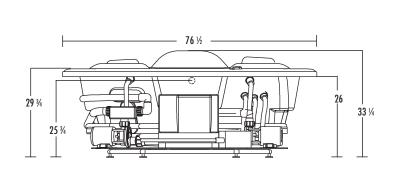



No alternate pump location available.

FEATURES lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Air System	Blower	Heater	Controls	Drain	Pkg. Wt.
Air-Whirlpool #AI9MIL7700	Acrylic	24	2 HP (2)	Injector	Variable speed	4.0 kw Inline	Electronic	Center	934 (425)

DIMENSIONS inches (mm)


Width	Depth	Height	Skirt
Overall / Net	Overall / Net	Overall / Net	Height
76 ½ (1940)	76 ½ (1940)	33 1/4 (845)	-

${\color{red} {\sf SUMP}} \ \ {\color{blue} {\sf DATA}} \ \ {\color{blue} {\sf inches}} \ ({\color{blue} {\sf mm}})$

Capacity to Overflow	Min. Operating Capacity	WIDTH @	centerline	DEPTH @ centerline		
gal (ltr)	gal (ltr)	Тор	Bottom	Тор	Bottom	
219 (830)	198 (750)	57 ½ (1460)	36 3/4 (935)	68 (1728)	55 ½ (1410)	

PLUMBING DIMENSIONS inches (mm)

А	В
3 1/4 (80)	38 1/4 (970)



NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) $16 \times 20 (405 \times 510)$ minimum access required at pump/blower location(s).

ELECTRICAL DATA

Component	Specification	Requirement
Electronic Control Package		230V; 50 AMP w/ GFCI; 4-Wire w/ Dedicated Neutral