


Lavatory Faucets

HDF[®]
COMMERCIAL



Submitted Model No.: _____
Specific Features: _____

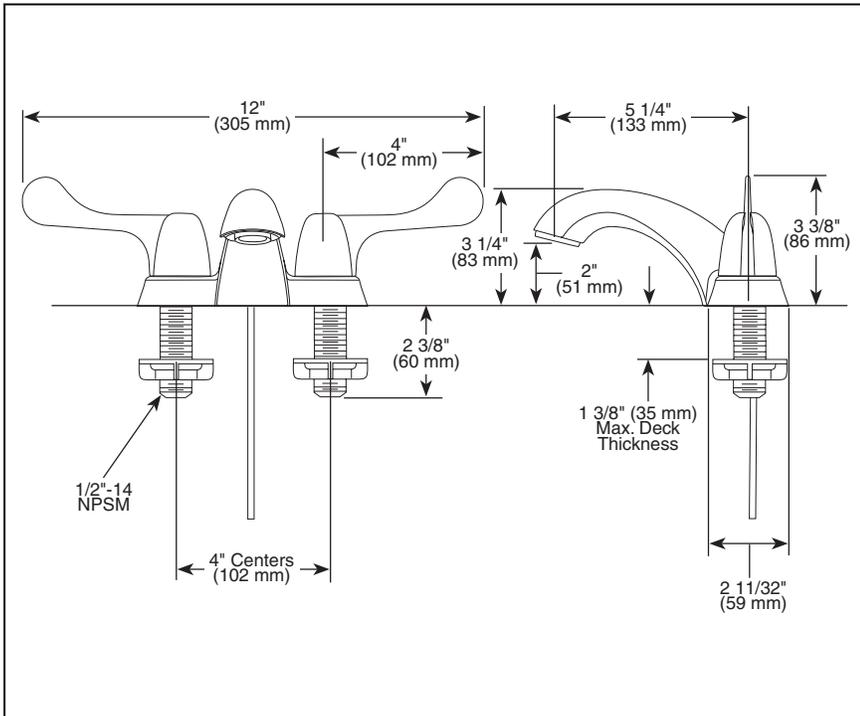

- Two Handle Deck Mount
- 2 and 3 Hole Sink Applications
- 4" (102 mm) Centerset




STANDARD SPECIFICATIONS:

- Solid brass fabricated body.
- 4" (102 mm) centerset.
- 5 1/4" (133 mm) long, 3 1/4" (83 mm) high rigid spout.
- Metal grid strainer (2529LF-HDF).
- Metal pop-up drain (2529LF-HDM).
- Hot and cold stems are interchangeable.
- 1/4 turn handle stops.
- Control mechanism is a rotating cylinder with stainless steel plate and 90° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/2"-14 NPSM threaded male inlet shanks.
- Maximum 1.5 gpm flowrate @ 60 PSI.
- Models containing "M" in suffix have metal drain with pop-up type fitting with plated flange and stopper.
- 2529LF-LGHGMHDF equipped with vandal resistant 0.5 gpm spray outlet and wrench.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- ☒ Indicates ADA compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.

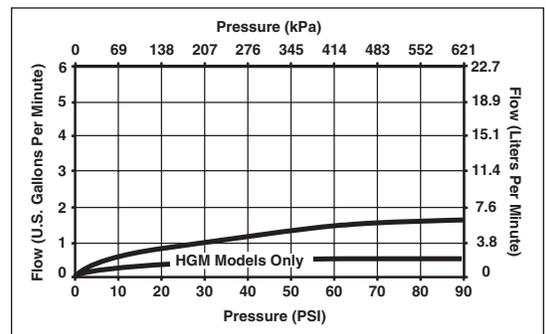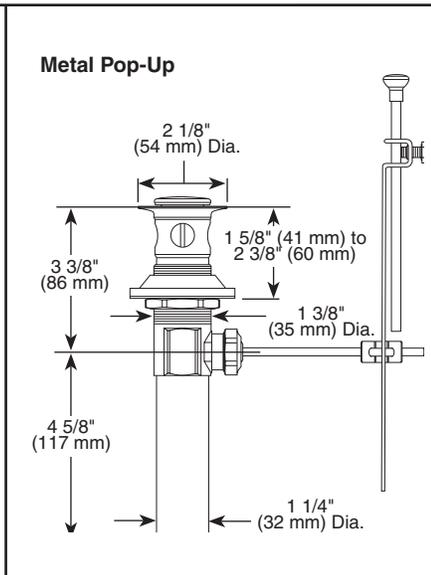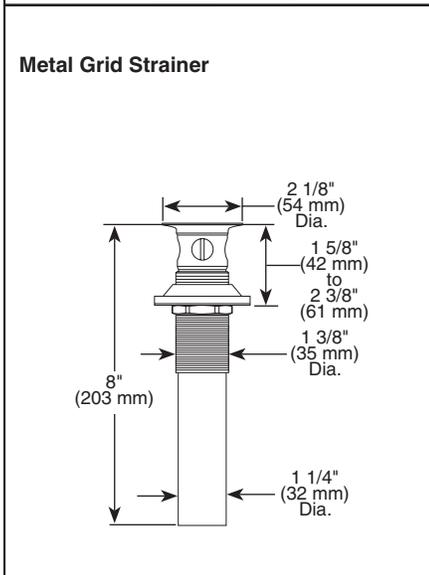

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

