



Model No: 25C3847

COMPLIES WITH:

- CSA certified.
- Complies to ASME A112.18.1/CSA B125.1
- Verified to <0.25% Pb average wetted surface regulations
- CSA certified.
- Complies to ASME A112.18.1/CSA B125.1
- (Contact Delta Representative for State and/or Local Approvals)
- Balanced Lever handles ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs operating force.





NOTES:

CA/VT Compliance:

This COMPLETE SERIES is ONLY available as CA/VT Compliant product as of Nov. 1, 2009.

The Product Numbers have NOT changed.

(Dimensional drawing on following page)

SPECIFICATION:

- Two handle sink faucet
- · Polished chrome plated finish
- · Metal hold-down package
- Anti-rotation, body mounted locking pins

Sink Faucet Deckmount

TECK® 1/4 turn ceramic structures

 Spout#: 8 - Gooseneck spout-4.5" radius - 10.5" height (unmounted) -Standard rigid/swivel field installation unless LS Limited swing option selected-Vandal resistant .090" wall thickness(R2)

Single shank mixing faucet less coverplate-CER-

- Outlet#: 4 Standard 1.5 USGPM (5.7 L/Min) Flow Control Aerator
- Handle#: 7 63.5 mm (2.5") Balanced Lever Handles ADA compliant -Metal - Color Indexed - Vandal Resistant screws


OPERATION:

Not Available

Page 1 of 2

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 11, 2012.



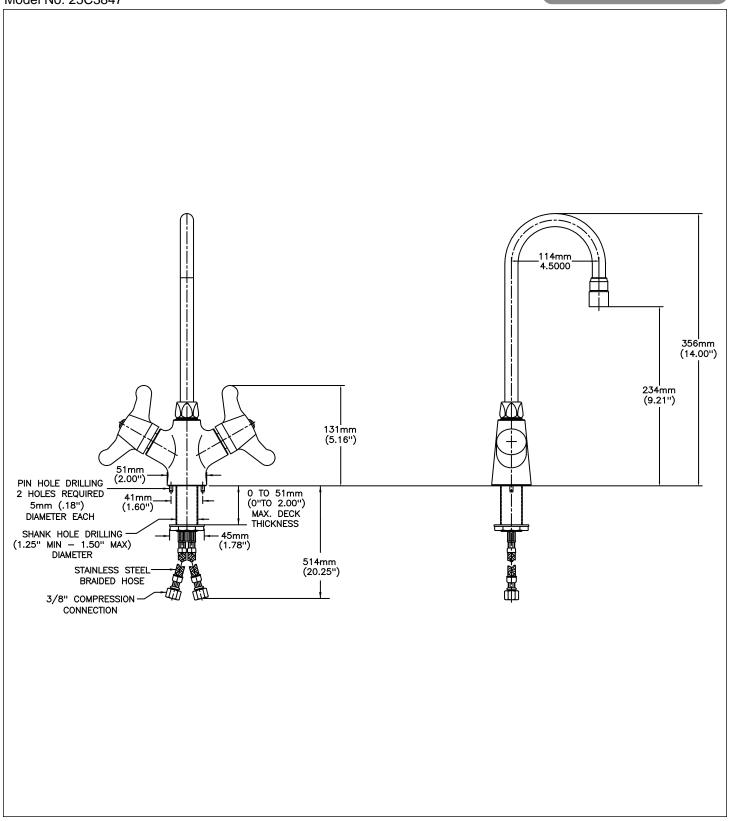

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 11, 2012.