
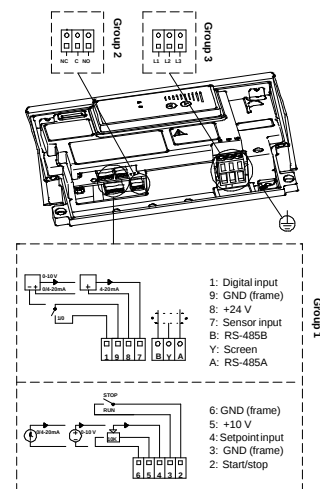
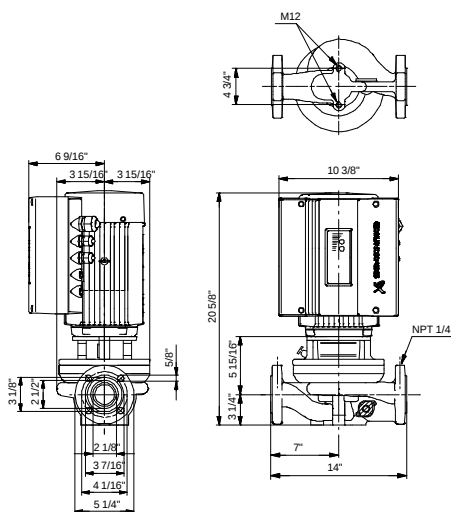



Position	Count	Description	Unit price
	-1	TPE 50-240/2 B U-G-Z-BUBE  Product photo could vary from the actual product Product No.: 91136597 Single-stage, centrifugal, in-line, single-head pump. The in-line design with opposite suction and discharge ports enables mounting in pipework or on a concrete foundation. The shaft seal is a corrosion resistant maintenance-free mechanical seal. The pump is fitted with a three-phase MLE motor with frequency converter and PI-controller integrated in the motor terminal box. No additional motor protection is required as both motor and electronics are protected by integrated overload and temperature protection. External sensor can be connected if controlled pump operation based on for example flow, differential pressure or temperature is required. A control panel enables setting of required setpoint as well as setting of pump to MIN or MAX operation or to STOP. The control panel has indicator lights for "Operation" and "Fault". Communication with the pump is possible by means of Grundfos R100 Remote Control enabling further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption". The terminal box holds terminals for the connection of: - Pump start/stop (potential-free contact), - external remote setpoint setting via analog signal, 0 - 5 V, 0 - 10 V, 0(4) - 20 mA, - 5 V voltage supply for setpoint potentiometer, I_{max} = 5 mA,	On request

Position	Count	Description	Unit price
		- sensor, 0 - 5 V, 0 - 10 V, 0(4) - 20 mA, - 24 V voltage supply for sensor, I_{max} = 40 mA, - input for forced control to MIN or MAX (potential-free contact), - potential-free fault signal relay with changeover contact, - RS485 GENIbus. Liquid: Liquid temperature range: 5 .. 284 °F Liquid temp: 68 °F Technical: Actual calculated flow: 96.9 US gpm Resulting head of the pump: 48.2 ft Shaft seal: BUBE Maximum operating pressure: 145 psi Materials: Pump housing: Bronze DIN W.-Nr. 2.1050 ASTM B505-C90700 Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Installation: Maximum ambient temperature: 104 °F Maximum operating pressure: 145 psi Flange standard: US Bronze Pipe connection: 2" Pressure stage: 125 psi Flange size for motor: 56C Electrical data: Motor type: 90CC Number of poles: 2 Rated power - P₂: 2 HP Main frequency: 60 Hz Rated voltage: 3 x 208-230 V Rated current: 5.75 A Cos phi - power factor: 0.95 Rated speed: 3460 rpm Enclosure class (IEC 34-5): 55 Insulation class (IEC 85): F Others: Gross weight: 107 lb	

Description	Value
Product name:	TPE 50-240/2 B U-G-Z-BUBE U-G-Z BUBE
Product Number:	91136597
EAN number:	5700838116892
Technical:	
Actual calculated flow:	96.9 US gpm
Resulting head of the pump:	48.2 ft
Head max:	78.7 ft
Shaft seal:	BUBE
Maximum operating pressure	145 psi
Pump Number:	96405268
Pump version:	U
Materials:	
Pump housing:	Bronze DIN W.-Nr. 2.1050 ASTM B505-C90700
Impeller:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Material code:	Z
Installation:	
Maximum ambient temperature:	104 °F
Maximum operating pressure	145 psi
Flange standard:	US Bronze
Connect code:	G
Pipe connection:	2"
Pressure stage:	125 psi
Flange size for motor:	56C
Liquid:	
Liquid temperature range	5 .. 284 °F
Liquid temp:	68 °F
Electrical data:	
Motor type:	90CC
Number of poles:	2
Rated power - P2:	2 HP
Main frequency:	60 Hz
Rated voltage:	3 x 208-230 V
Rated current:	5.75 A
Cos phi - power factor:	0.95
Rated speed:	3460 rpm
Enclosure class (IEC 34-5):	55
Insulation class (IEC 85):	F
Motor protection:	NONE
Motor Number:	85900823
Others:	
Gross weight:	107 lb
Config. file no:	97845357

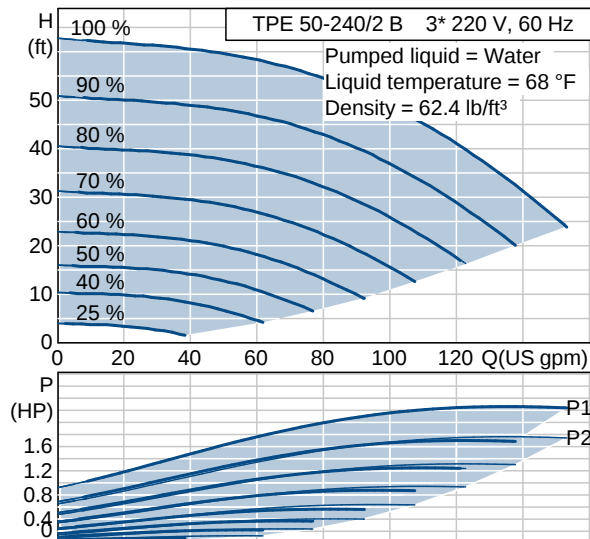


91136597 TPE 50-240/2 B 60 Hz

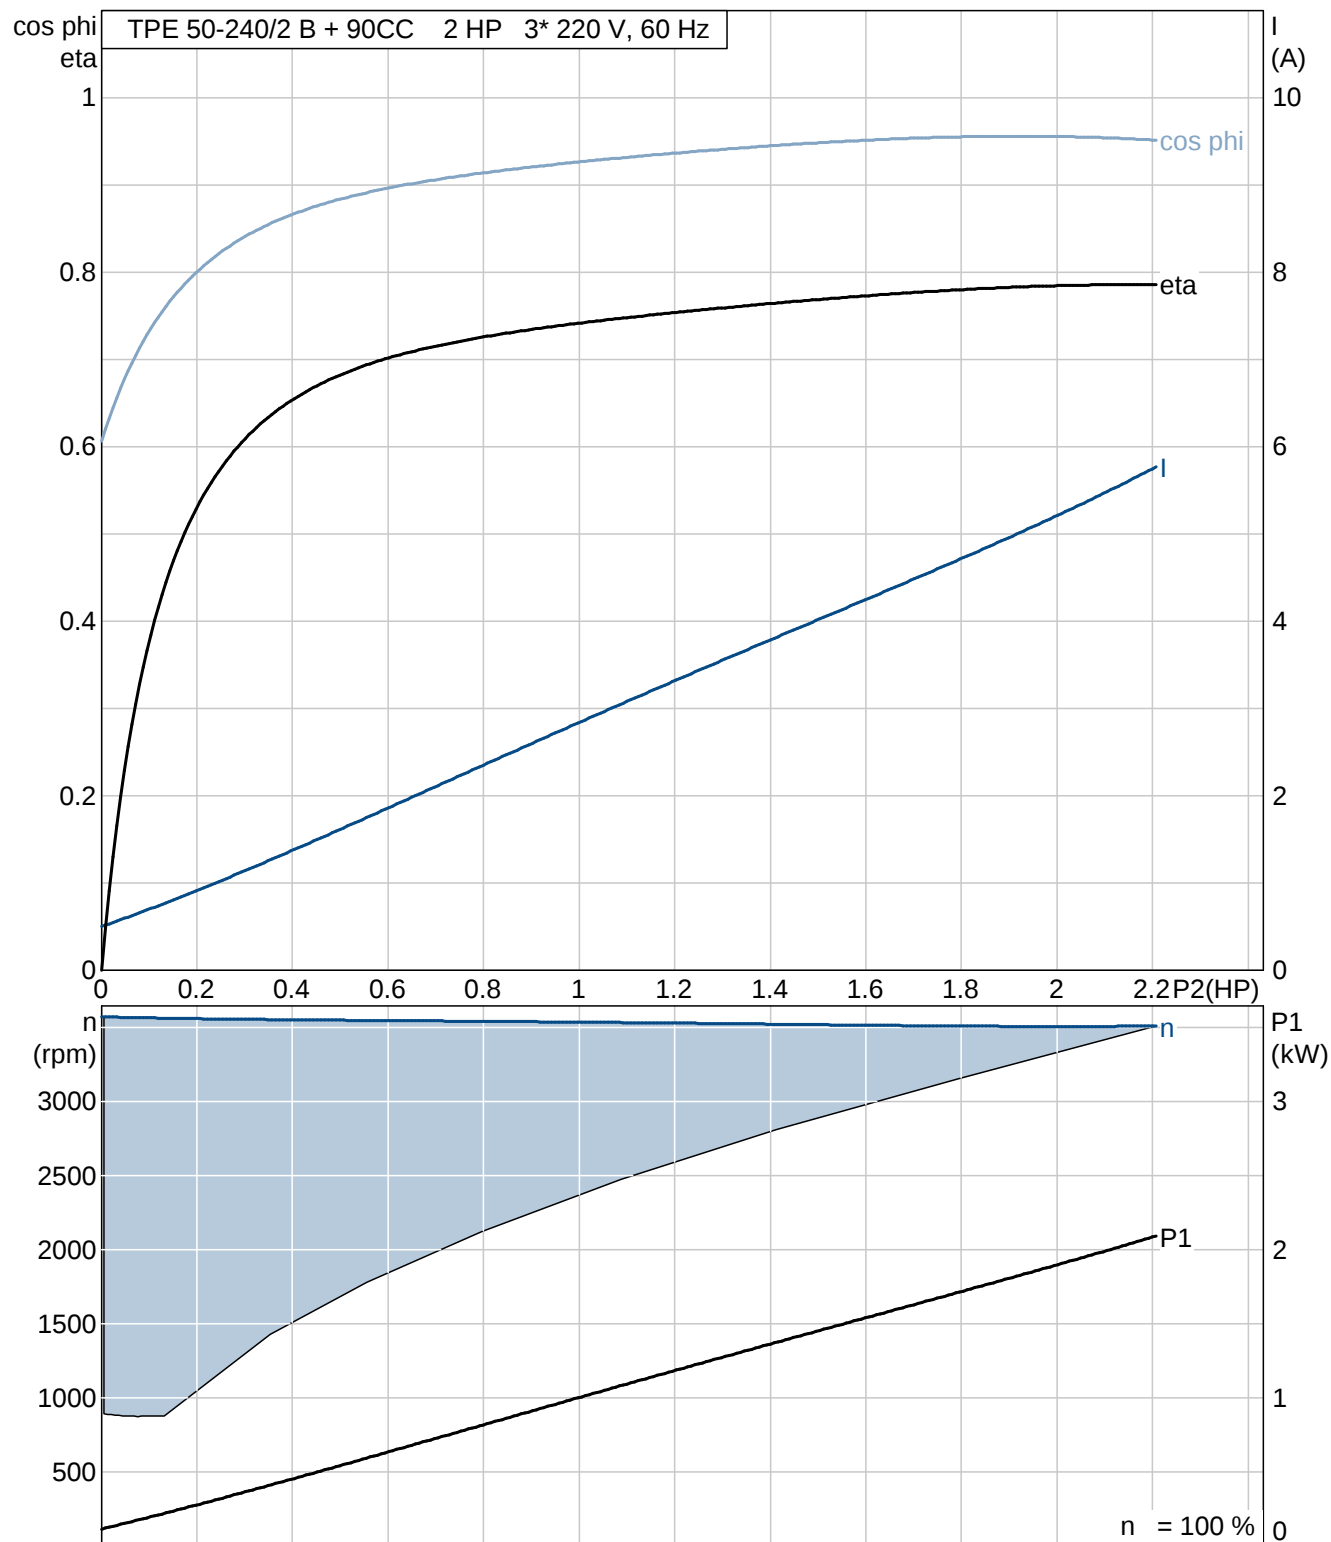




Company name: -
Created by: -
Phone: -
Fax: -
Date: -

91136597 TPE 50-240/2 B 60 Hz

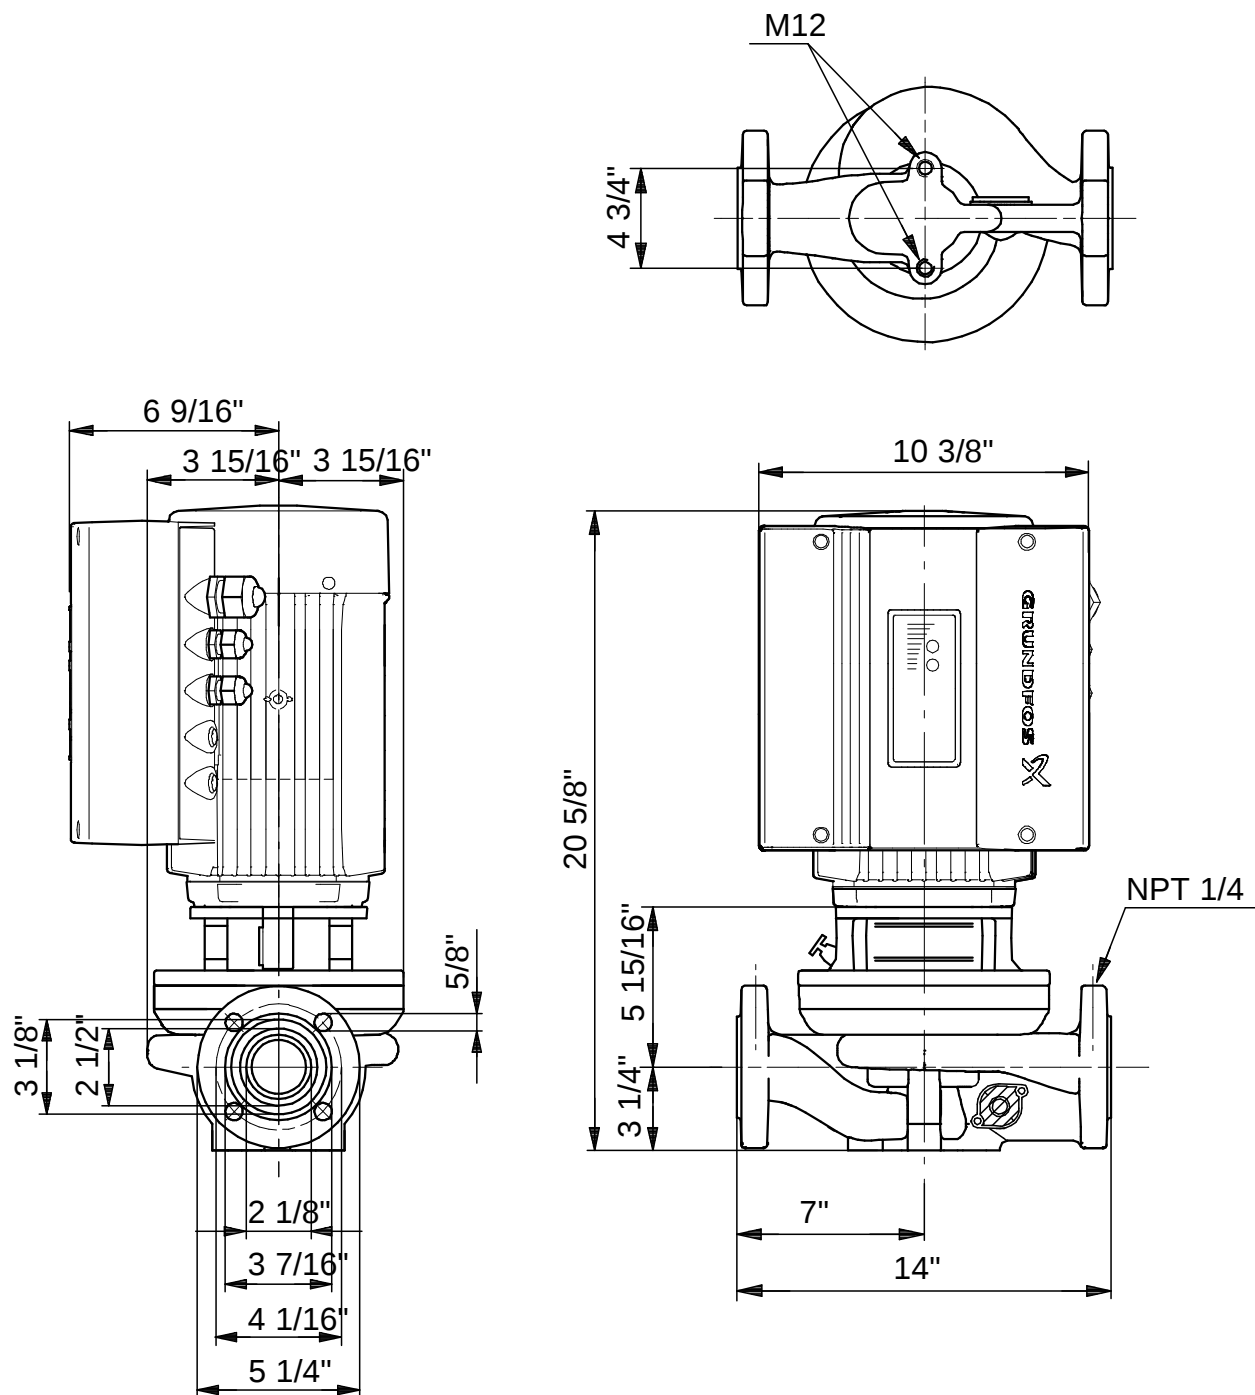

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

91136597 TPE 50-240/2 B 60 Hz

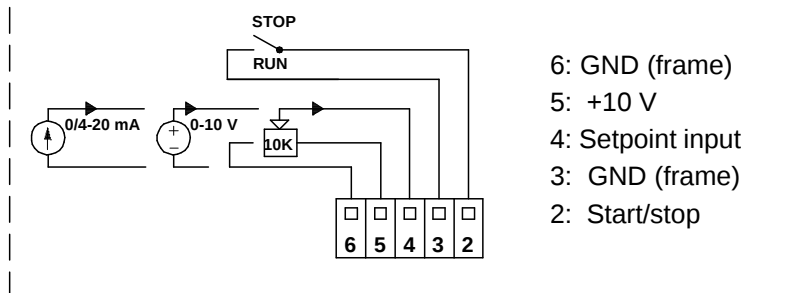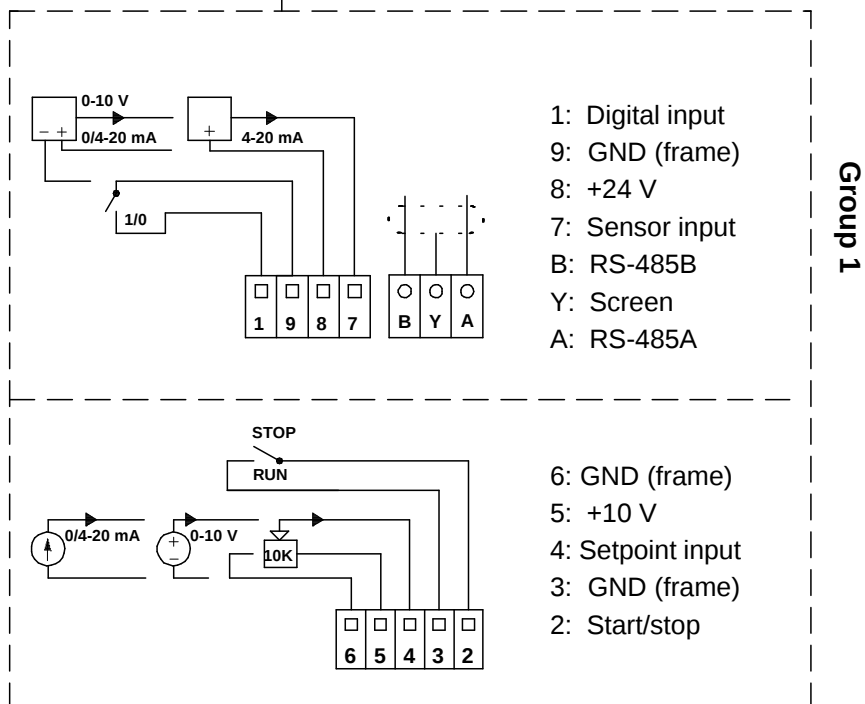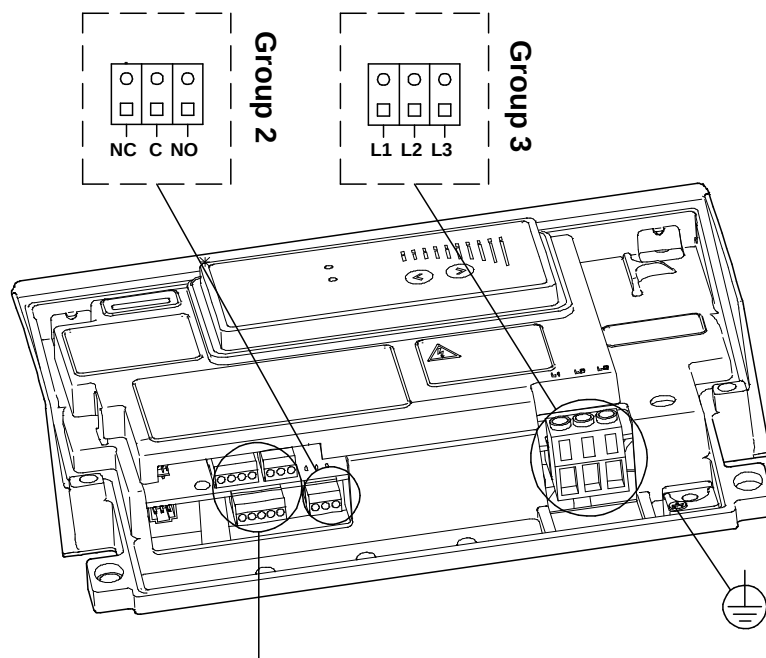

All units are [mm] unless otherwise presented.