

# ENGINEERING EXCELLENCE

#### **Brentwood Series** #4BR110T

# SPECIFICATION SHEET

# **DESCRIPTION**

- Single Handle Tub and Shower Trim Set
- Porcelain Lever Handle
- Ceramic Disc Cartridge with Temperature Limit Stop
- Dual Function 2-1/2" Diameter Showerhead
- Shower Arm and Flange
- Combo 1/2" IPS/Slip-On Diverter Tub Spout
- Tub Spout Escutcheon
- Color Match Sleeve and Retaining Ring

### STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1
- CUPC / IAPMO LISTED / ADA **COMPLIANT**

# **FINISHES**

- PC PVD Polished Chrome
- **PVD Brushed Nickel** BN
- PN **PVD Polished Nickel**
- PB **PVD Polished Brass**
- ORB Oil Rubbed Bronze



#4BR110T SHOWN \* ADA



### **FLOW**

Showerhead Limited to 2.5 **GPM** 

Model #:	

Specific Features:

Project Name:

Submitted For:

Model	Description	Finishes		
#4BR110T	Single Handle Tub and Shower Trim Set		□ Other	
#4BR410T Single Handle Valve Trim Set		□ PC	□ Other	
Required Valve				
#4020B Single Handle Tub and Shower-Valve Set		□ N/A		




ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468 Commerce, CA 90040 www.pioneerind.com Pioneer Industries, Inc. © 2013 DMSP4BR110T/REV. 12 2012 Page 1 of 2

# **Installation Note:**

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout.

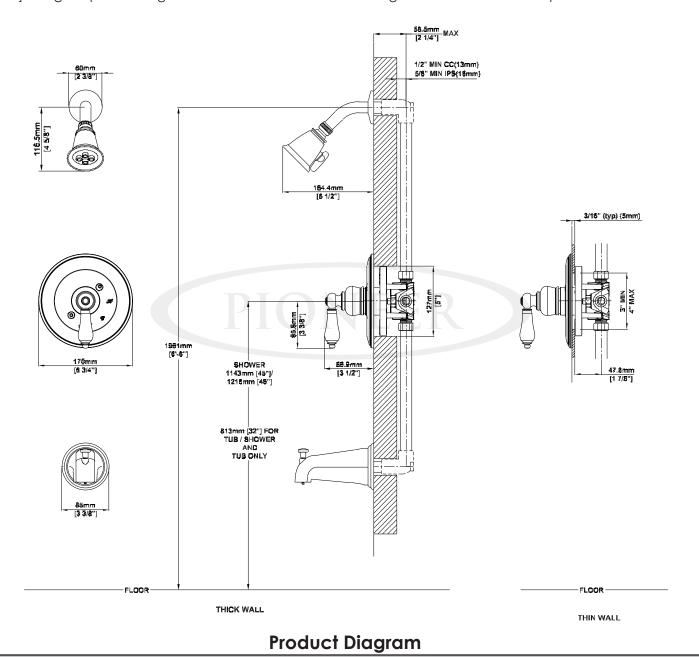



DMSP4BR110T/REV. 12 2012 Page 2 of 2

Pioneer:1-800-338-9468 Commerce, CA 90040 www.pioneerind.com Pioneer Industries, Inc. © 2013