

# HYDAPIPE®

## Surface Mounted Shower System

- 1-902S-FSB:** Through wall piping configuration with soap dish
- 1-902-FSB:** Through wall piping configuration less soap dish

Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Fre-Flo, all brass, vandal resistant head with ball joint on institutional type head bracket. Levertrol lever diverter with volume control. Wall/hand shower with flexible 5' metal hose with in-line vacuum breaker, wall connection and flange. 30" slide bar for hand shower mounting. Attached soap dish and sloped metal top cap. Stainless steel covering to be 18 gauge with #4 brush finish.

**Modifications:**

**Valve:**

- Suffix 21:** Single supply, manual shut off, 4 arm handle
- Suffix 22:** Single supply, manual shut off, lever handle
- Suffix 60:** Single supply, metering shut off (not ADA compliant)

**Shower head:**

- Suffix 270:** Fre-Flo, all brass, ball joint, adjustable spray with volume control
- Suffix 131:** Super, ball joint, adjustable spray head
- Suffix 121:** Super, ball joint, adjustable spray head with volume control
- Suffix 285:** Fre-Flo, all brass, fixed spray (no ball joint)
- Suffix OWBJ:** One way ball joint
- Suffix DSH:** Additional shower head in lieu of hand spray unit

**Soap dish:**

- Suffix RS:** Recessed soap dish
- Suffix CWM:** Wall mounted cake soap dish


**Hand spray accessories:**

- Suffix FS:** Hand spray, hose and wall hook (in lieu of Suffix FSB)
- Suffix OD:** Quick disconnect for hand spray units
- Suffix R:** White vinyl hose in lieu of metal hose

**Seat and Grab bars\*:**

- Suffix HC1:** Slat seat and two wall grab bar (right hand)
- Suffix HC2:** Slat seat and two wall grab bar (left hand)
- Suffix HC3:** Padded seat and two wall grab bar (right hand)
- Suffix HC4:** Padded seat and two wall grab bar (left hand)

\*ADA requirements state that the seat shall be located opposite the controls. This will require the construction of a partial wall, or use of a reinforced partition for mounting the folding seat. Construction of a partial wall or reinforced partition to be provided by others.

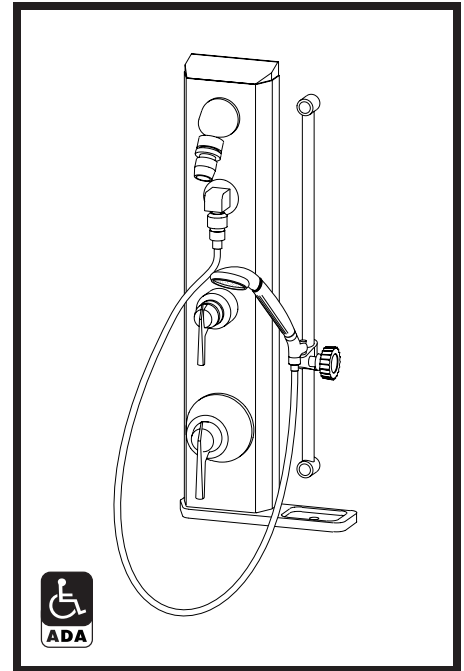

**SYMMONS PRODUCTS MEET  
ANSI A112.18.1M, EPA '92  
AND ALL KNOWN FLOW RATE  
REQUIREMENTS.  
Shower Heads and Hand Showers  
2.5 GPM (9.5 L/min)**

**Job/Location**

.....  
.....

**Engineer**

.....  
.....

**Contractor**

.....  
.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
(800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849  
Website: [www.symmons.com](http://www.symmons.com) ■ Email: [customerservice@symmons.com](mailto:customerservice@symmons.com)

