

HYDAPIPE®

Corner Mounted Shower System

- 1-907:** Through wall piping corner type configuration less soap dish
- 1-907C:** Through wall piping corner type configuration with cake soap dish affixed to unit

Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Fre-Flo, all brass, vandal resistant head with ball joint on institutional type head bracket. Sloped metal top corner cap. Stainless steel covering to be 18 gauge with #4 brush finish.

Modifications:

Valve:


- Suffix 21:** Single supply, manual shut off, 4 arm handle
- Suffix 22:** Single supply, manual shut off, lever handle
- Suffix 60:** Single supply, metering shut off
- Suffix 56:** Pressure Balance and metering combination

Shower head:

- Suffix 270:** Fre-Flo, all brass, ball joint, adjustable spray with volume control
- Suffix 131:** Super, ball joint, adjustable spray head
- Suffix 121:** Super, ball joint, adjustable spray head with volume control
- Suffix 285:** Fre-Flo, all brass, fixed spray (no ball joint)
- Suffix OWBJ:** One way ball joint

Soap dish:

- Suffix RS:** Recessed soap dish
- Suffix CWM:** Wall mounted cake soap dish

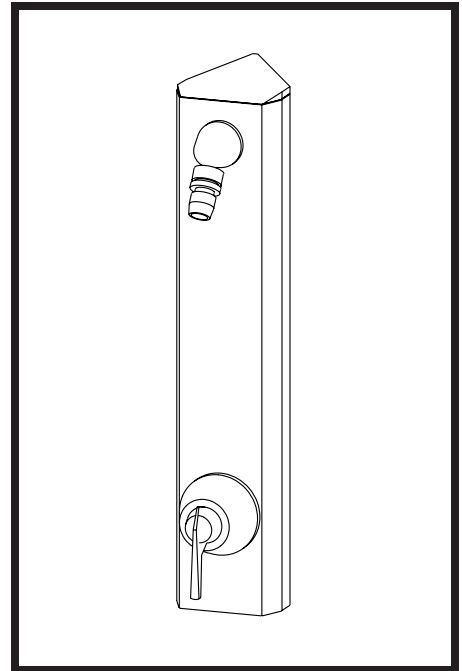

**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

Job/Location

.....

Engineer

.....

Contractor

.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
 Website: www.symmons.com ■ Email: customerservice@symmons.com

©2003, 2008 Symmons Industries, Inc. Printed in U.S.A. ■ 043008

