Location:



Lavatory Faucet S-20 Series

Specification Submittal

Feature Highlights

- Single lever faucet with red & blue indicators on handle
- Handle limit stops
- Standard aerator, 2.2 gpm flow rate (8.3 L/min)
- Quarter turn ceramic control components
- Supply has 6 inch 3/8 inch copper tubing, 4 inch (102mm)centers
- Metal contruction, polished chrome finish




Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime to the original end purchaser in consumer installations.
- 5 years for commercial installations

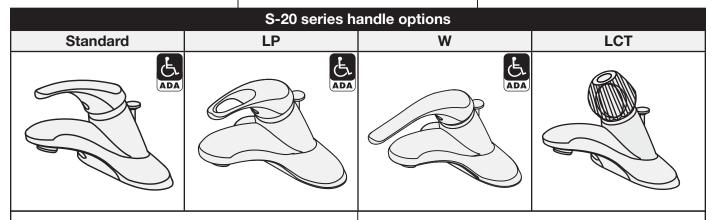

Model Numbers

Append appropriate -suffix to model number.

- □ S-20 Faucet only with lift rod hole
- □ S-20-0 Faucet only with no lift rod hole
- □ S-20-1 Faucet with lift rod
- □ S-20-2 Faucet with pop-up drain & lift rod
- □ S-20-2-G Faucet with grid strainer drain

Alternative Finish Options

Append appropriate -suffix to model number.

□ -STN Radiance[®] satin finish*

*Note (1) Handles with red/blue indicators are not available with decorative finishes.

Handle Options / Modifications

Append appropriate -suffix to model number.

- □ -LP Loop handle with metal finish
- □ -LCT Clear acrylic handle (only available with option BH, braided supply hose)
- □ -W Lever handle with metal finish, 6 inch (152mm) handle with red & blue indicators on handle (Chrome only)

Other Options

П

Append appropriate -suffix to model number.

- □ -LST 16 inch copper supply tubing
- □ -BH 20 inch braided supply hose
- □ -IPS 1/2 inch IPS connections
- □ -OFG Offset grid strainer (model S-20-2-G only)
 - -.5 .5 gpm (1.9 L/min) flow restrictor, vandal resist.
- □ -1.0 1.0 gpm (3.8 L/min) flow restrictor, vandal resist.
- □ -1.5 1.5 gpm (5.7 L/min) flow restrictor, vandal resist.
- □ -VP Standard aerator is vandal resistant type
 - -NA Non-aerated , laminar flow outlet

