

Location:

# SYMMONS® Ultra-Sense™

## Sensor Activated Lavatory Faucet S-6060 Series Specification Submittal



Model S-6060-G  
with 4 inch deck plate



### Model Number

- S-6060..... Faucet with 6v lithium battery power pack
- S-6060-AC.....Faucet with AC wall plug-in power supply
- S-6060-ACM...Faucet for use in multi-unit applications.  
(Requires 12VDC power supply, model S-6240 purchased separately )

### Options / Modifications

Append appropriate -suffix to model number

- G Grid strainer drain assembly
- OFG Offset grid strainer drain assembly
- SM Single hole mount only  
*Deck plate is not included*
- 0.5 0.5 gpm (1.9 L/min) flow rate restrictor,  
Only available with the following additional options:
  - -VP vandal protection, i.e append: -0.5-VP
  - -NA laminar flow non-aerated spray outlet with -VP vandal protection, i.e. append: -0.5-VP-NA
- NA Laminar flow non-aerated spray outlet flow rate restrictor (only available with -0.5 gpm flow rate restrictor with -VP vandal protection) append: -0.5-VP-NA
- VP Vandal protective flow rate restrictor (only available with -0.5 gpm (5.7 L/min) flow rate restrictor) append: -0.5-VP
- DP 8 inch deck plate
- LST 18 inch copper supply tube and adapter  
*(instead of 20 inch braided hose)*
- 20 20 foot (6096 mm) 12VDC power supply cord in place of standard 10 foot (3048 mm) cord (Model S-6060-ACM only)

### Finish Options / Modifications

Append appropriate -suffix to model number

- Chrome plated brass (standard finish)

### Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05  
AB1953 low lead


### Feature Highlights

- Sensor Activated Lavatory Faucet with infrared Position Sensitive Detection (PSD) system
- Factory set 10 second cycle time with automatic shut-off
- Single hole or 3 hole mounting hardware with 4 inch center deck plate included
- Water supply in-line strainer / adapter
- Vandal protective aerator, 1.5 gpm (5.7 L/min) flow rate
- 20 inch braided supply hose or optional 18 inch copper supply tube
- Electronic components are sealed above deck in cast brass body for easy installation, service and maximum vandal resistance
- Chrome plated brass (standard finish)
- **Model S-6060** Internal 6 volt lithium battery, typical battery life is 3 years at 210 cycles per day
- **Model S-6060-AC** Faucet includes AC wall plug-in power supply with 72 inch (1829 mm) power cord (120VAC/12VDC, class II, UL listed for US/C)
- **Model S-6060-ACM** Model used with multi-unit AC supply that can operate up to eight (8) faucets. Includes 10 foot (3048 mm) 12VDC power supply cord  
The following items are required and purchased separately:


**S-6240** Universal 120 - 240VAC power supply with 12VDC output. Supports up to eight (8) faucets.



Note: Using a non-Symmons power supply will void warranty  
*(see separate S-6240 Specification Submittal for product details)*




**S-6244** Standard electrical termination box for 12VDC @ 3.33 amps  
Box size: 6"H (152 mm) x 10"W (254 mm) x 4"D (102 mm)  
Also available at local electrical supply.



### Warranty

- Limited Lifetime - to the original end purchaser in residential / consumer installations
- 5 years - for commercial installations

## Dimensions Ultra-Sense Lavatory Faucet, S-6060, S-6060-AC/ACM

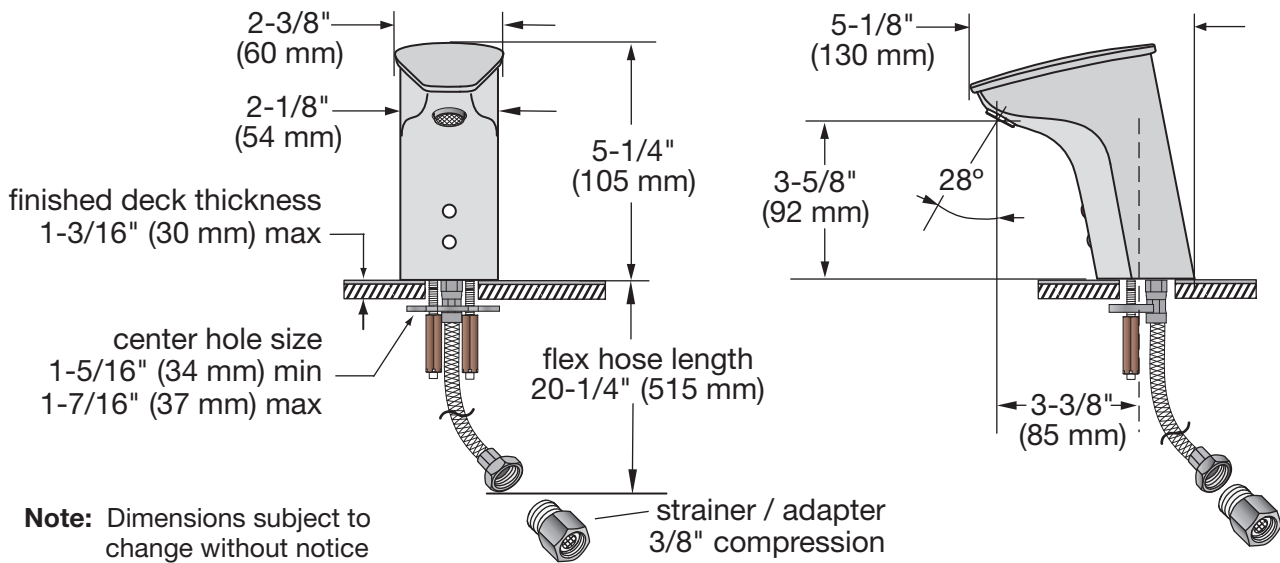

## Application Universal Power Supply S-6240 attached to S-6060-ACM Faucets

