

Architect/Engineering Specifications:

8" wall mount mixing faucet with polished chrome plated brass body, 26" riser, overhead swivel arm, 20" flexible stainless steel hose, heat resistant handle, 0.65 GPM low flow spray valve, ceramic cartridges with check valves, lever handles, 1/2" NPT female inlets, 6" adjustable wall bracket and spray valve holder. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. EPAct 2005 compliant.





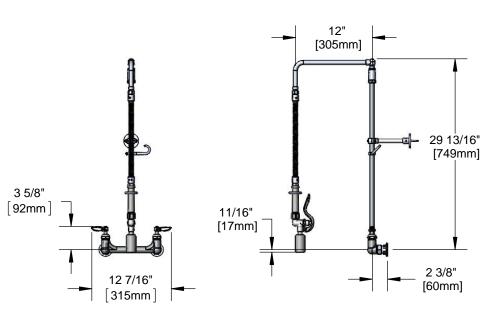

Features & Benefits:

- 8" wall mount polished chrome plated brass body
- 26" rigid riser w/ overhead swivel arm
- 20" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- 0.65 GPM low flow spray valve
- Cerama cartridges w/ check valves to prevent cross flow of water
- Lever handles w/ color coded indexes
- 1/2" NPT female eccentric inlets with Ø 2" flanges
- Adjustable centers from 7 3/4" to 8 1/4"
- 6" adjustable wall bracket
- Material: Polished chrome plated brass body, riser, swivel arm & spray valve body, stainless steel hose, and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- EPAct 2005 (PRSV)
- EPA WaterSense (PRSV)

Warranty: One Year (Limited)

Cerama Cartridge: Lifetime (Limited)

Performance Data:

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F

Flow Rate: 0.65 GPM @ 60 psi

Optional Handles

☐ 4" Wrist Action

- □ Lever (Standard)
- □ 4-Arm

Optional Cartridges With Checks

- □ Quarter Turn Cerama w/ Check Valve (Standard)
- □ Quarter Turn Eterna w/ Spring Check

Optional Pre-Rinse Spray Valves


- □ B-0107 (1.42 GPM)
- ☐ B-0107-C (0.65 GPM) (Standard)
- □ B-0107-J (1.07 GPM)
- □ B-0108 (1.48 GPM)
- □ B-0108-C (0.65 GPM)











Date: 09/25/15