

MADERA™ FloWise® 381mm (15") HEIGHT

- Floor-mounted flushometer valve toilet
 - Vitreous china
 - Meets definition for HET (High Efficiency Toilet)
 - High Efficiency low consumption (4.8 Lpf/1.07 gpf)
 - Will also function at 3.8 Lpf/0.8 gpf and 6 Lpf/1.3 gpf with a properly set dual flush valve
 - EverClean® surface inhibits the growth of stain-and odor-causing bacteria, mold, and mildew on the surface
 - Fully glazed 54mm (2-1/8") trapway
 - Elongated bowl
 - 254 or 305mm (10" or 12") rough-in
 - 381mm (15") rim height
 - Condensation channel
 - Powerful direct-fed siphon jet action
 - 254 x 305mm (10" x 12") water surface area
 - 38mm (1-1/2") inlet spud
 - 2 bolt caps
 - 100% factory flush tested
- (Flushometer valve & seat shown not included)

- 3451 001** Elongated Universal bowl only, top spud
- 3452 001** Elongated Universal bowl only, top spud with slotted rim for bedpan holding
- 3453 001** Elongated Universal bowl only, back spud
- 3455 001** Elongated Universal bowl only, back spud with slotted rim for bedpan holding

Component Parts:

- 047007-0070A** Inlet spud (furnished with bowl)
- 481310-100.xxx** Bolt caps with retainers (furnished with bowl)

Nominal Dimensions:

718 x 356 x 381mm
(28-1/4" x 14" x 15")

Fixture only, less seat and flushometer valve

Recommended working pressure--
between 25 psi at valve when flushing and
80 psi static.

Meets or Exceeds the Following Specifications: Compliance Certifications -

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA International B45



NOTE: Roughing-in information shown on reverse side of page

To Be Specified:


- Colour: White Bone Linen
- Seat:
 - American Standard #5901 110 Heavy duty open front less cover with EverClean® surface
 - American Standard #5905 110 Extra heavy duty open front less cover with EverClean® surface
- Alternative Seat:
- Flushometer Valve:
 - American Standard Selectronic™ #6065 121.002 DC Power (Top Spud)
 - American Standard Selectronic™ #6065 221.007 DC Power (Back Spud)
 - American Standard Selectronic™ #6067 221.007 AC Power (Back Spud)
 - American Standard Selectronic™ #6068 221.007 Multi AC Power (Back Spud)
- Alternative Flushometer Valve:

EVERCLEAN
Surface




HET High Efficiency Toilet (1.07gpf/4.8Lpf)

3451 001/3452 001

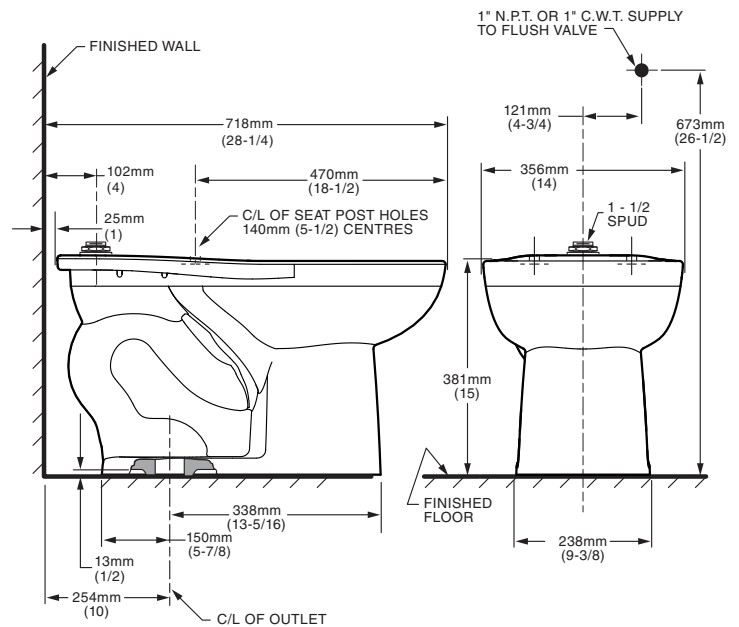

3453 001/3455 001

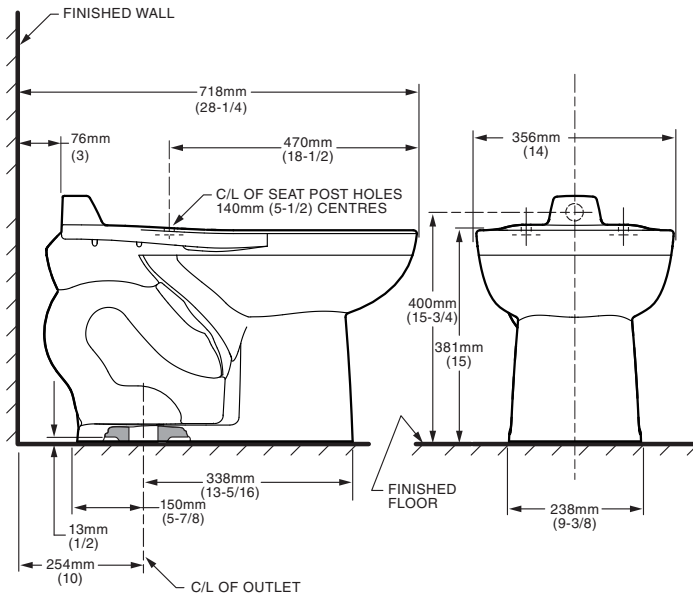

NOTES:

PRODUCT 3451 001 SHOWN, 3452 001 SAME AS EXCEPT WITH SLOTTED RIM FOR BED PAN HOLDING.

PRODUCT 3453 001 SHOWN, 3455 001 SAME AS EXCEPT WITH SLOTTED RIM FOR BED PAN HOLDING.

TO COMPLY WITH AREA CODE GOVERNING THE HEIGHT OF VACUUM BREAKER ON THE FLUSHOMETER VALVE, THE PLUMBER MUST VERIFY DIMENSIONS SHOWN FOR SUPPLY ROUGHING.

THIS TOILET DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 254MM (10") AND A MAXIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.

FLUSHOMETER VALVE NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. FLUSHOMETER VALVE REQUIREMENTS FOR 305MM (12") ROUGH-IN: SWEAT EXTENSION NIPPLE IS REQUIRED. REFER TO VALVE MANUFACTURER AND LOCAL CODES.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.