SPECIFICATIONS

SINGLE HANDLE WALL MOUNT LAVATORY FAUCET

Description

- Distinctive ribbon spout
- · Single handle with concealed deck
- 9 1/2" spout with touch down drain
- Two hole wall mount

Flow & Valving

See Chart

Standards

- ASME A112.18.1
- CSA B125
- NSF 61-9
- Listed IAPMO/UPC
- Energy policy act of 1992
- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms 👢

GPM FLOW RATE CHART 3 2.5 2 1.5

Warranty

Danze faucets are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.






- Brushed Nickel (BN)

Trim Kits: (for use w/ rough-in valves) D201644T

Special Packaging

80 PSI

- · This product also available with trim and valve packaged separately.
- Use with rough-in valve D106200BT: Combination 1/2" copper sweat/IPS
- · Model numbers for trim kit items include the suffix "T"

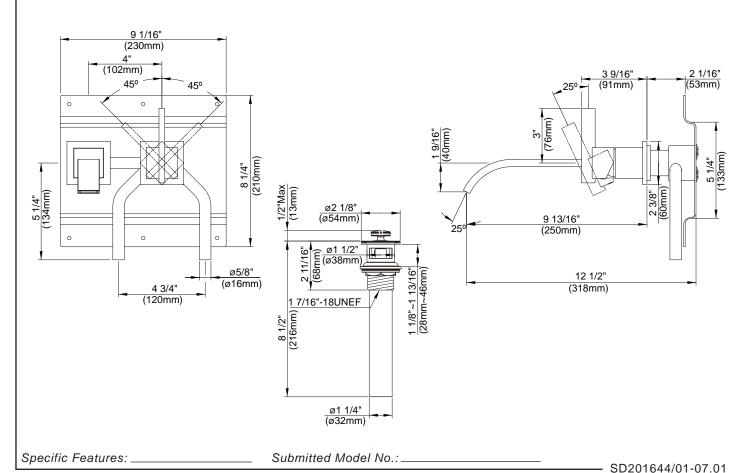

20

Danze, Inc., 2500 Internationale Parkway, Woodridge, IL 60517, USA