



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes four single-function body sprays
- Includes single-function showerhead, arm and flange

OPERATION

- Pull-on/push-off operation of temperature and volume, rotational control of transfer valve
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 180° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3.6^{\circ}\text{F}$ ($\pm 2^{\circ}\text{C}$)

FLOW

- Showerhead limited to 2.5 gpm MAX (9.5 L/min) at 80 psi
- Body sprays limited to 1.75 gpm MAX (6.6 L/min) at 80 psi


STANDARDS

- Third party certified to meet ASME A112.18.1/ CSA B125.1 and all applicable requirements referenced therein, including ASSE 1016

- **ADA** for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

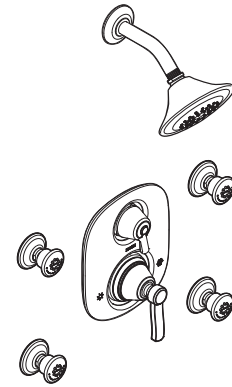


ROTHBURY™

Three Function Transfer Valve Spa Trim

Models: TS203 series

Valves: 3330 series
3320 series

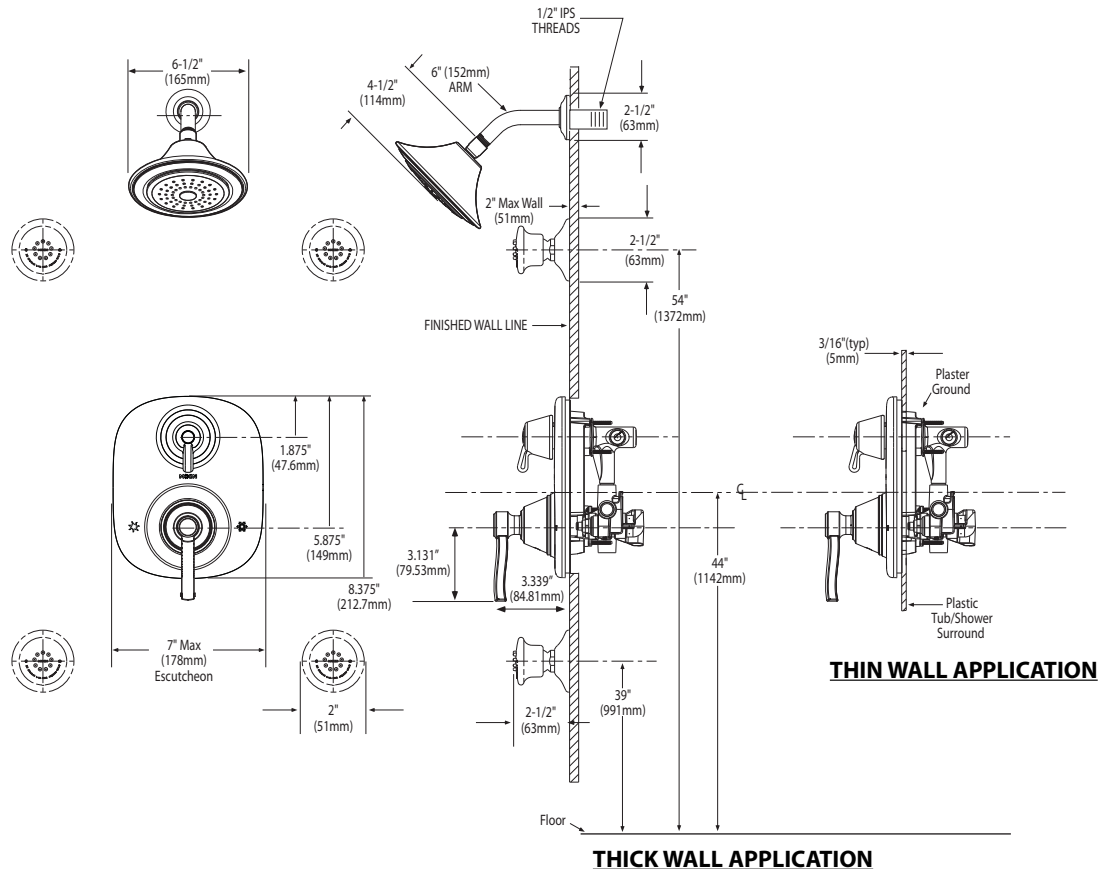

CRITICAL DIMENSIONS

(DO NOT SCALE)