

Standard Features:


- Surface mount fixed blade grille with steel blades at 0°
- Blades are parallel to longest dimension
- Blades are spaced at 2/3"
- Countersunk mounting holes with color matching Phillips Posidriv screws
- Available in even sizes up to 36"x24"
- Rust resistant pre-coat with durable powder finish
- Soft White

Options:


- Recessed screwdriver operated Opposed Blade Damper (937-0)
- 2" ADC compliant round collar with bead for ease of installation (square sizes only)
- T-20 Tamper Proof Screws

Finishes:


STANDARD COLORS		DESIGNER COLORS	
<input type="checkbox"/> Soft White	<input type="checkbox"/> Driftwood Tan	<input type="checkbox"/> Black	<input type="checkbox"/> Aluminum Paint
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> Bronze	<input type="checkbox"/> Coffee Tan
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> Storm Gray	<input type="checkbox"/> Warm White
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> Cement Gray	<input type="checkbox"/> Glossy White

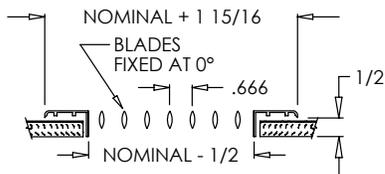


937

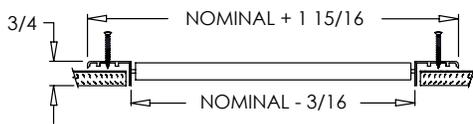

937

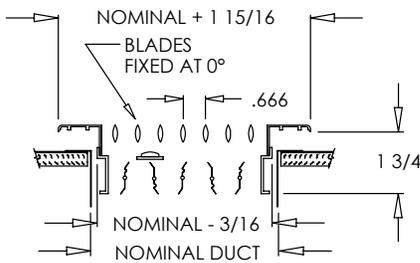

937-O

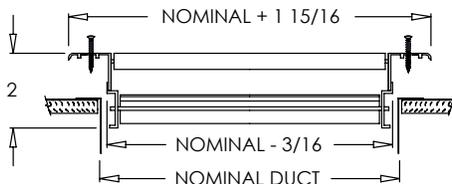

937-O

Additional Information:

Submittal Notes

Project / Location:	
Engineer:	
Architect:	
Contractor:	

--