

DESCRIPTION

- Metal construction with chrome plating, chrome with LifeShine® polished brass accents, LifeShine® polished brass, LifeShine® Satine, platinum or glacier finish
- Includes head, arm, flange and diverter tub spout

OPERATION

- Lever style handle
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 2^\circ$

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min)

CARTRIDGE

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS

- Third party certified by CSA to meet CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




Villeta™ Posi-Temp® Single-Handle Tub/Shower Trim Kit

**Models: TL2393, TL2393CP, TL2393P,
TL2393PM, TL2393W
(Bulk Packed 12 per carton)**

**Models: TL2303, TL2303CP, TL2303P,
TL2303PM, TL2303W, TL2303ST
(Packed 1 per carton)**

**NOTE: See reverse side
for illustrated parts**

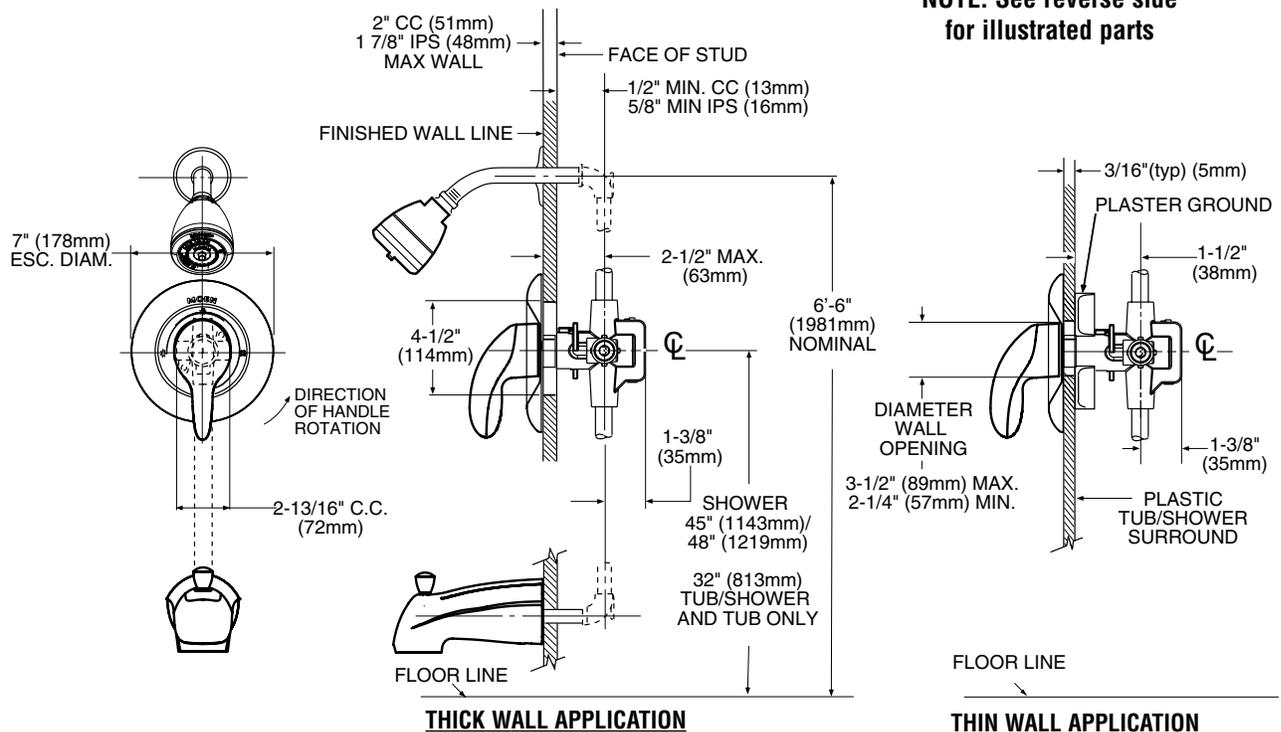

CRITICAL DIMENSIONS

(DO NOT SCALE)



ADA symbol applies to shower valve control only.