

This unit offers anti-siphon protection.



Anti-Siphon Automatic Draining Freezeless Wall Faucet Model 25

The Woodford Model 25 drains as handle is shut off even if hose is attached. This faucet is designed for outside residential water service applications and intended for irrigation purposes.

SPECIFICATIONS:

MODEL 25 - Approved under ASSE Standard 1019-B and listed by IAPMO®. Meets Government Specification WW-541b Type 205.

Vacuum Breaker - Anti-Siphon

NIDEL® model 34HA with 3/4" male hose thread. Approved under ASSE Standard 1011. Canadian Standards Association and listed by IAPMO®.

FEATURES:

EXTERIOR FINISH - Brass

VALVE - Molded nitrile suitable for hot water.

NOZZLE - 3/4" male hose thread.

NO LEAD SOLDER - All solder joints.

PLUNGER - Hemispherical cushion type.

STEM SCREW - DELRIN®

HEAD NUT - Brass


HANDLE - Metal. (Optional Tee Key)

INLETS - As shown.

MAX PRESSURE - 125 p.s.i.

MAX TEMPERATURE - 120° F

NOTICE - To close and drain, turn handle clockwise until seated and water drains out of the drain hole or faucet may freeze and burst. Vacuum Breaker replacement is recommended every 3-5 years.

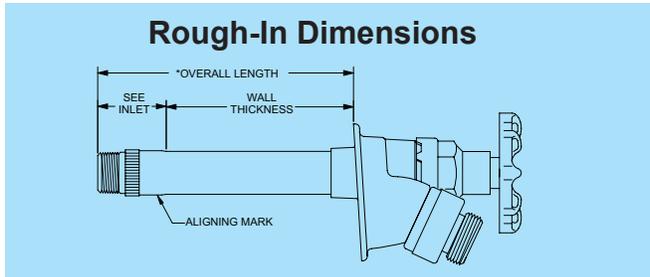

| | | | | | | | | | | | | |
|------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
| Wall Thickness (inches) | | | | | | | | | | | | |
| 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | | |
| 2.0 | 2.1 | 2.2 | 2.3 | 2.4 | 2.5 | 2.7 | 2.9 | 3.1 | 3.3 | 3.5 | | |
| Shipping Wt. (lbs) | | | | | | | | | | | | |
| Approx. Shipping Weight Each | | | | | | | | | | | | |

*Overall Length Dimension: Add wall thickness and inlet option length shown in chart at right.

Patent informaion available at :
<http://www.woodfordmfg.com/Woodford/patents/>
 For Installation / Troubleshooting Instructions go to:
www.woodfordmfg.com or call 1-800-621-6032

Inlet Descriptions

| | |
|--|--|
| | <p>C Inlet COMBINATION Copper Sweat Fitting 1/2" K, L or M Inside 3/4" M Only Outside</p> |
| | <p>CP Inlet COMBINATION 1/2" Male Pipe Thread 1/2" Female Sweat</p> |
| | <p>CP3 Inlet COMBINATION 3/4" Male Pipe Thread 3/4" Female Sweat</p> |
| | <p>P Inlet COMBINATION 1/2" Female Pipe Thread 3/4" Male Pipe Thread</p> |
| | <p>PX Inlet 1/2" PEX Tube Fitting PX3 INLET 3/4" PEX Tube Fitting</p> |

When ordering, specify model , inlet and wall thickness.