

## **SPECIFICATION SHEET**

## Ensign Medicine Cabinet




## FEATURES/TYPICAL SPECIFICATIONS

- Surface Mount Installation
  - · Pre-drilled mounting holes
- Formed and welded steel housing (WB/ST)
  - 24 gauge steel construction with white, heat cured, acrylic paint finish
  - Polished stainless steel trim strips both sides, top, and bottom on body front
  - 24 gauge galvanized steel top cover
- Sliding Mirror Doors
  - 3/16" thick float glass mirror door with polished edges, 4 sides (2 typical)
  - Clear acrylic door pull (2 typical)
  - Mirror doors slide in gray PVC dual slotted tracks (2 typical / one top & one bottom) snapped into housing
- Incandescent dual light sockets (2 typical) (Uses four 60 watt maximum, medium base, 120V bulbs (I60A) - bulbs not included)
- .White, translucent plastic lens
  - .060 thick high impact polystyrene
  - Ribbed outside surface
- Grounded convenience outlet and on/off switch located top right side of cabinet
- 26 gauge galvanized steel shelf with white, heat cured, enamel paint finish (1 typical)
  - Fixed shelf removable (FX2)
- · Includes installation hardware
- Pallet Quantity = 18 units

## Finishes:

Housing: PT01 - Basic White Mirror: POL1 - Polished Edge

Cabinet Trim: SS8-Polished Stainless Steel

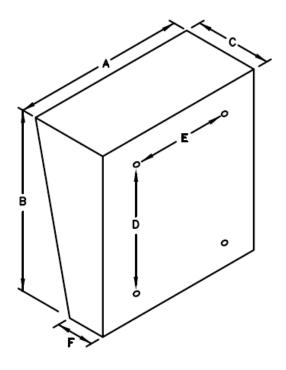

	Dimensions In Inches						
Model #	Description	Α	В	С	D	E	F
124LP	MEDCAB 2DR 24X23 SS8 WB/ST	24	23½	81/4	197⁄8	15	5½

REFERENCE	QTY.	REMARKS	Project		
			Location		
			Architect		
			Engineer		
			Contractor		
			Submitted by Date		

<sup>\*</sup> All models and material specifications are subject to change or withdrawal without notice.