

SPEAKMAN® S-159O-AF

Exposed Anti-Scald Balanced Pressure Shower

FEATURES:

- Sentinel Mark II® exposed anti-scald balanced pressure Showerpac.
- 18 gauge stainless steel outer shielding.
- Stainless steel self-draining soap dish.
- Chrome plated brass lever handle.
- Adjustable temperature limit stop.
- Brass valve body. Integral spring check stops.
- Pressure balancing & ceramic temperature regulating cartridge with built-in check valves.
- Concealed integral mounting lugs.
- S-2292 showerhead with flow control device reduces flow to 2.5 gpm (9.46 L/min) maximum
- 1/2 in. copper tube inlets through the wall or dropped from ceiling.
- Vandal-resistant construction.

FINISH:



Stainless Steel

COMPLIANCE:

- Valve meets ASME A112.18.1 CSA B125.1 standards.
- ASSE 1016 standards.
- Shower heads meet ASME A112.18.1 CSA B125.1 standards.

OPTIONS: Add suffix to model


- Less showerhead -LH
- S-2251 showerhead -1
- S-2252 showerhead -2
- S-2272-E2 showerhead -5
- Less soap dish -LSD

WARRANTY:

- Shower Head: 1 year limited
- Valve: 5 year limited



DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are 1/2" male copper sweat.

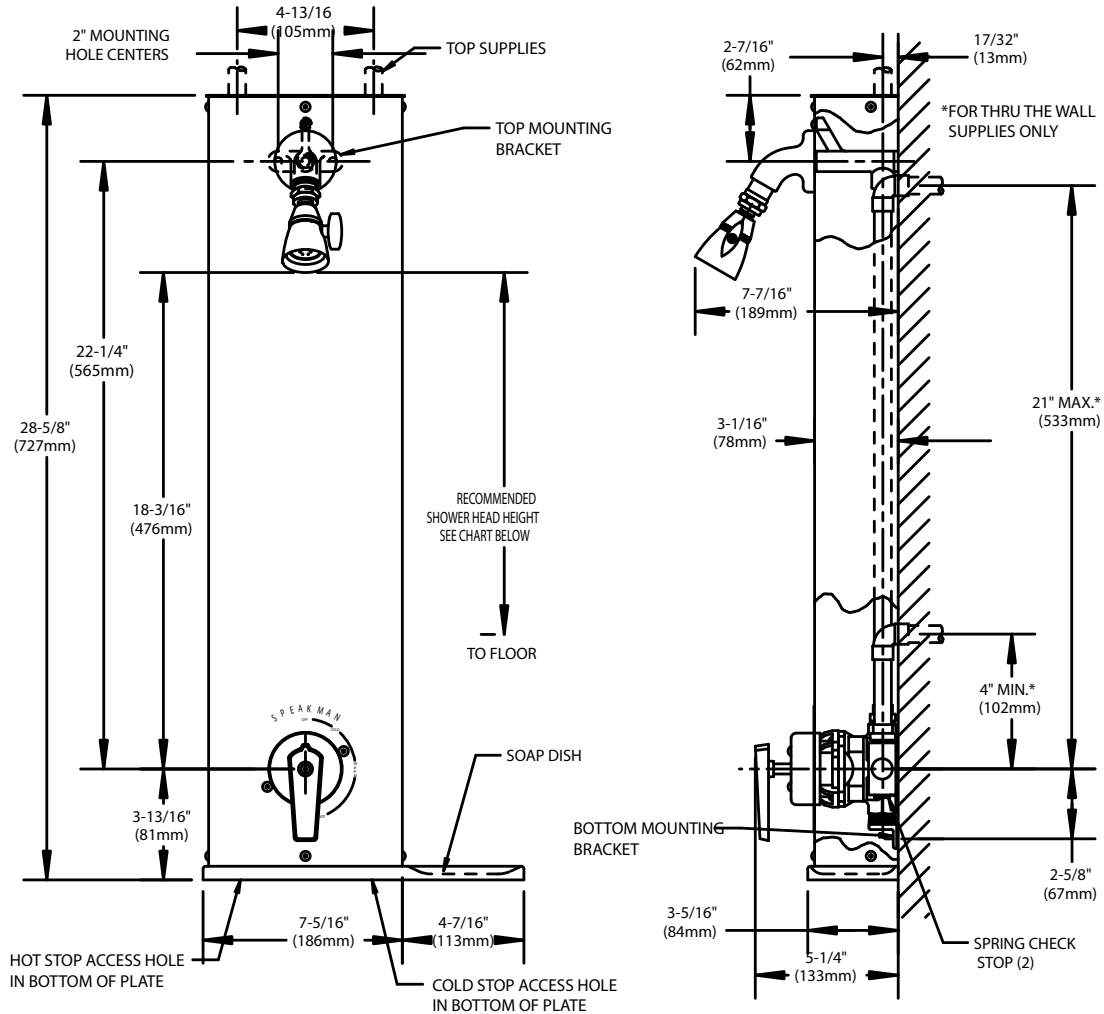

RECOMMENDED HEAD HEIGHTS	
MEN	6'0" (1.83 Meters)
BOYS, SENIOR HIGH	5'10" (1.78 Meters)
BOYS, JUNIOR HIGH	5'6" (1.68 Meters)
BOYS, ELEMENTARY	5'4" (1.63 Meters)
WOMEN	5'8" (1.73 Meters)
GIRLS, SENIOR HIGH	5'6" (1.68 Meters)
GIRLS, JUNIOR HIGH	5'4" (1.63 Meters)
GIRLS, ELEMENTARY	5'2" (1.58 Meters)