



# PRODUCT CATALOG

2019-2020





**5104**

**10-1/4" Circular Saw**

- 14 AMP motor delivers enough power to cut beams and timber
- Cuts 4x lumber in a single pass
- Well balanced and weighs only 20.3 lbs. for increased operator comfort
- Precision gearing with ball-and-needle bearing construction
- Electric brake for maximum productivity
- Large cutting and bevel capacity (3-3/4" at 90° and 2-3/4" at 45°)

**5104 Includes:** 10-1/4" 24T Carbide-Tipped Saw Blade, Framing (A-94910), Wrench (783204-6), Rip Fence (165499-7)

Blade Diameter	10-1/4"
Arbor	5/8"
Max. Cutting Capacity (at 90°)	3-3/4"
Max. Cutting Capacity (at 45°)	2-3/4"
No Load Speed	3,800 RPM
Watts Out	2,100
AMPS	14
Overall Length	16"
Net Weight	20.3 lbs.
Shipping Weight	26.7 lbs.



**5402NA**

**16-5/16" Circular Saw**

- Powerful 15 AMP motor delivers enough power to cut through pressure treated lumber
- Cuts 6x material at 90° and 4x material at 45° in a single pass
- Weighs only 32.1 lbs. for increased operator comfort
- Electric brake for maximum productivity
- Ideal for cutting large timber and lumber

**5402NA Includes:** 16-5/16" 32T Carbide-Tipped Circular Saw Blade (A-90956), Wrench (783204-6), Rip Fence (164019-4), Saw Storage Holder (194701-1)

Blade Diameter	16-5/16"
Arbor	1"
Max. Cutting Capacity (at 90°)	6-3/16"
Max. Cutting Capacity (at 45°)	4-3/16"
No Load Speed	2,300 RPM
Watts Out	1,800
AMPS	15
Overall Length	24-1/4"
Net Weight	32.1 lbs.
Shipping Weight	43.4 lbs.



**JR3070CTH**

**AVT® Recipro Pallet Saw - 15 AMP with High Torque Limiter**

- Designed specifically for use in the pallet refurbish industry
- High torque limiter increases tool life, and is intended only for high torque applications such as dismantling pallets
- Equipped with Anti-Vibration Technology (AVT®) for increased user comfort and greater productivity
- Large 2-finger trigger with lock-on button for added convenience
- Variable speed control dial enables user to match the speed to the application
- 4-position orbital/straight cutting action

**JR3070CTH Includes:** Tool Only

Length of Stroke	1-1/4"
Strokes Per Minute (variable speed)	0 - 2,800 SPM
AMPS	15
Overall Length	19-1/8"
Net Weight	9.7 lbs.
Shipping Weight	12.38 lbs.



**JR3070CT / JR3070CTZ**

**AVT® Recipro Saw - 15 AMP**

- Powerful 15 AMP motor with electronic speed control maintains constant speed under load
- Equipped with Anti-Vibration Technology (AVT®) for increased user comfort and greater productivity
- 4-position orbital/straight cutting action
- Large 2-finger trigger with lock-on button for added convenience
- "Tool-less" blade change and shoe adjustment
- Built-in clutch reduces gear damage by disengaging gears if blade binds

**JR3070CT Includes:** 6" 6TPI Recipro Saw Blade (723054-A-1), 6" Metal Cutting Recipro Saw Blade, 18TPI (723066-A-1), Steel Tool Case

**JR3070CTZ Includes:** 6" 6TPI Recipro Saw Blade (723054-A-1), 6" Metal Cutting Recipro Saw Blade, 18TPI (723066-A-1), Steel Tool Case

Length of Stroke	1-1/4"
Strokes Per Minute (variable speed)	0 - 2,800 SPM
AMPS	15
Overall Length	19-1/8"
Net Weight:	JR3070CT (9.7 lbs.), JR3070CTZ (9.6 lbs.)
Shipping Weight:	JR3070CT (25.82 lbs.), JR3070CTZ (24 lbs.)



**JR3050T**

**Recipro Saw - 11 AMP**

- Variable speed trigger for precise cutting in a wide variety of applications
- "Tool-less" blade change and shoe adjustment
- Long 1-1/8 stroke for faster cutting
- Well balanced design (only 7.3 lbs.) for reduced operator fatigue
- Large 2-finger trigger with lock-on button
- Built-in dust blower clears the line of cut for greater accuracy

**JR3050T Includes:** 6" 6TPI Recipro Saw Blade (723054-A-1), 6" Metal Cutting Recipro Saw Blade, 18TPI (723066-A-1), Tool Case

**JR3050TZ Includes:** 6" 6TPI Recipro Saw Blade (723054-A-1), 6" Metal Cutting Recipro Saw Blade, 18TPI (723066-A-1), Tool Case

Length of Stroke	1-1/8"
Strokes Per Minute (variable speed)	0 - 2,800 SPM
AMPS	11
Overall Length	17-3/4"
Net Weight	7.3 lbs.
Shipping Weight	13.9 lbs.



**LXT BRUSHLESS**

**XRJ06PT**

**18V X2 LXT® (36V) Brushless Recipro Saw Kit**

- X2 LXT® technology delivers up to 155 cuts per charge in 2x10 SPF lumber using two 5.0Ah batteries
- Makita-built variable 2-speed brushless motor delivers 0-2,300 (Low) and 0-3,000 (High) strokes per minute
- Reinforced fixed shoe for added durability
- Refined crank mechanism design minimizes blade deflection and reduces vibration
- "Tool-less" blade change system allows for faster blade installation and removal for increased productivity

**XRJ06PT Includes:** 18V X2 LXT® (36V) Brushless Recipro Saw (XRJ06Z), (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B), 18V LXT® Lithium-Ion Dual Port Charger (DC18RD), Tool Bag (831271-6), 6" Metal Cutting Recipro Saw Blade, 18TPI (723066-A-1)

**XRJ06Z Includes:** Tool only, battery & charger not included  
6" Metal Cutting Recipro Saw Blade, 18TPI (723066-A-1)

Length of Stroke	1-1/4"
Max. Cutting Capacity (wood w/ 12" blade)	10"
Max. Cutting Capacity (pipe)	5-1/8"
Strokes Per Minute (var. 2 spd.)	0 - 2,300 / 0 - 3,000 SPM
Battery	2X 18V LXT® Lithium-Ion
Overall Length	17-3/4"
Net Weight (with battery)	10.2 lbs.
Shipping Weight	19.845 lbs.



**LXT BRUSHLESS**

**XRJ05T**

**18V LXT® Brushless Recipro Saw Kit**

- Makita-built variable 2-speed brushless motor delivers 0-2,300 (Low) & 0-3,000 (High) strokes per minute and a 1-1/4" stroke length for faster cutting
- "Tool-less" blade change system allows for faster blade installation and removal for increased productivity
- Large two-finger variable speed trigger for operator convenience
- Compact and ergonomic design at only 17-1/4" long
- Weighs only 8.2 lbs. with battery for reduced operator fatigue
- Rubberized soft grip handle provides increased comfort on the job

**XRJ05T Includes:** 18V LXT® Brushless Recipro Saw (XRJ05Z), (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B), 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC), Recipro Saw Blade, Tool Case

**XRJ05Z Includes:** Tool only, battery & charger not included  
6" 6TPI Recipro Saw Blade (723054-A-1)

Length of Stroke	1-1/4"
Max. Cutting Capacity (wood w/ 12" blade)	10"
Max. Cutting Capacity (pipe)	5-1/8"
Strokes Per Minute (var. 2 spd.)	0 - 2,300 / 0 - 3,000 SPM
Battery	18V LXT® Lithium-Ion
Overall Length	17-1/4"
Net Weight (with battery)	8.2 lbs.
Shipping Weight	19.01 lbs.



**LXT COMPACT**

**XRJ01T**

**18V LXT® Compact Recipro Saw Kit**

- Variable speed (0 - 3,000 SPM) with a 1/2" stroke length for faster and more efficient cutting
- Makita exclusive dual-position on/off switch allows for either paddle or trigger switch operation
- "Tool-less" blade change system allows for faster blade installation and removal for increased productivity
- Compact and ergonomic design at 15-5/8" long
- Weighs only 3.9 lbs. (with battery) for reduced operator fatigue
- Built-in L.E.D. light illuminates the work area

**XRJ01T Includes:** 18V LXT® Compact Recipro Saw (XRJ01Z), (2) 18V LXT® Lithium-Ion 5.0Ah Battery (BL1850B), 18V LXT® Lithium-Ion Rapid Optimum Charger (DC18RC), 4" 18TPI Metal Cutting Recipro Saw Blade (723063-A-1), 4" 6TPI Wood Cutting Recipro Saw Blade (B-20432-1), Tool Bag

**XRJ01Z Includes:** Tool only, battery & charger not included  
4" 18TPI Metal Cutting Recipro Saw Blade (B-20404-4), 4" 6TPI Wood Cutting Recipro Saw Blade (B-20432)


Length of Stroke	1/2"
Max. Cutting Capacity (wood)	2"
Max. Cutting Capacity (pipe)	2"
Strokes Per Minute (variable speed)	0 - 3,000 SPM
Battery	18V LXT® Lithium-Ion
Overall Length	15-5/8"
Net Weight (with battery)	3.9 lbs.
Shipping Weight	12.1 lbs.

NEW

# MAX EFFICIENCY

CUTS FASTER | MORE CUTS PER CHARGE

The new Max Efficiency saw blade features high grade Tungsten Carbide tips that are engineered for longer blade life and up to 70% faster cutting and run time compared to standard blades.

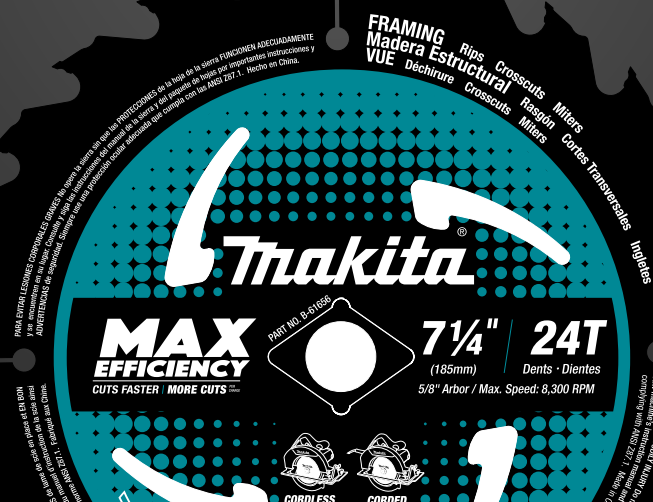

Reduced swing width allows for smoother material removal with less cutting resistance



Ultra-thin 0.057" kerf reduces the load put on the tool



General Contractor



Framing



Framing

Diameter	Blade Type	No. Teeth	Arbor	Grind	Hook	Plate	Kerf	Max. RPM	Model	Part #
3-3/8"	General Purpose	20T	15mm	ATB	20°	.028"	.039"	2,240	SH01W, SH01ZW	A-95021
3-3/8"	General Purpose	24T	15mm	ATB	24°	.039"	.078"	2,240		721005-A
4-3/8"	General Purpose	12T	20mm	ATB	22°	.049"	.073"	13,890		A-90093
4-3/8"	General Purpose	24T	20mm	ATB	10°	.055"	.078"	13,890	4200NH	721107-6A
5-3/8"	General Purpose	16T	5/8"	ATAF	20°	.039"	.059"	4,500	XSS03	A-94904
5-1/2"	General Purpose	18T	5/8"	ATB	20°	.055"	.078"	10,900	5005BA	792335-0
<b>For Use with Cordless Plunge Saws</b>										
6-1/2"	Crosscutting	48T	20mm	ATB	8°	.062"	.087"	9,250	SP6000J/J1, XPS01/2	B-07353*
6-1/2"	General Purpose	28T	20mm	ATB	23°	.055"	.079"	9,250		A-99960
6-1/2"	Corian®	48T	20mm	TCG	5°	.055"	.079"	9,250	XPS01PTJ, XPS02ZU	A-98809
6-1/2"	Crosscutting	48T	20mm	ATB	8°	.049"	.073"	9,250		A-99932
6-1/2"	Aluminum	56T	20mm	TCG	-3°	.055"	.079"	9,250		A-99976
6-1/2"	Crosscutting	56T	20mm	ATAF	23°	.039"	.057"	9,250	XPS01PTJ, XPS02ZU	B-57342
6-1/2"	Crosscutting	60T	20mm	ATB	5°	.055"	.079"	9,250		A-99982
6-1/2"	Crosscutting	60T	20mm	TCG	5°	.055"	.079"	9,250		A-99998
6-1/2"	General Purpose	16T	5/8"	ATAF	20°	.039"	.059"	4,770		T-01395
6-1/2"	General Purpose	24T	5/8"	ATB	20°	.039"	.059"	6,500		A-85092
6-1/2"	Framing	24T	5/8"	ATAF	20°	.039"	.059"	4,770	XSH03, XSS01	T-01404
6-1/2"	Framing	25T	5/8"	ATAFR	23°	0.039"	.055"	9,250		B-62963
6-1/2"	Crosscutting	40T	5/8"	ATB	18°	.039"	.063"	4,770		A-90314
6-1/2"	General Purpose	40T	5/8"	ATAF	18°	.039"	.059"	4,770		T-01410
7-1/4"	Framing	24T	5/8"	ATAFR	23°	0.039"	.057"	8,300		B-61656 / B-61656-10 (10/pk)
7-1/4"	General Contractor	16T	5/8"	ATB	25°	.049"	.073"	8,300		A-90009-B-10 (10/pk)
7-1/4"	General Contractor	24T	5/8"	ATB	15°	.047"	.071"	8,300	XSR01, XSH06, 5007F, 5007FA, 5007MG, 5007MGA, 5377MG, HS7600, 5477 NB, XSH01, XSR01, 5007NK	D-45989-10 (10/pk)
7-1/4"	Framing	24T	5/8"	"M"	15°	.047"	.071"	8,300		A-94839-10 (10/pk)
7-1/4"	Ultra-Coated Framing	24T	5/8"	"M"	15°	.047"	.071"	8,300		A-94530-10 (10/pk)
7-1/4"	Fine Crosscutting	40T	5/8"	ATB	20°	.049"	.073"	8,500		721251-A
8-1/4"	Framing	24T	5/8"	ATB	20°	.051"	.078"	5,700		D-21521
8-1/4"	Fine Crosscutting	40T	5/8"	ATB	20°	.055"	.079"	5,700	5008MGA	792377-A
10-1/4"	Framing	24T	5/8"	ATB	20°	.063"	.091"	5,870	5104, HS0600	A-94910
16-5/16"	Beam & Timber	32T	1"	ATB	20°	.07"	.109"	3,500		A-90956
16-5/16"	Beam & Timber	60T	1"	ATB	20°	.078"	.109"	3,500	5402NA	792118-8

### 2-Pc. 6-1/2" Carbide-Tipped Circular Saw Blade Set

- Ultra-Thin Kerf carbide-tipped design provides smoother cuts with less drag on the motor and minimal material loss
- 1 ea. 16T and 24T 6-1/2" Carbide-Tipped Circular Saw Blade



Model	Part #
XSH03, XSS01	T-01426

\*Indicates cordless models  
\*Can be used with both corded and cordless models

### STEEL SAW BLADES

Diameter	Blade Type	No. Teeth	Arbor	Grind	Hook	Plate	Kerf	Max. RPM	Model	Part #
3-3/8"	General Purpose	50T	15mm	—	—	.031"	.046"	2,240	SH01W	721003-8
3-3/8"	Thin Materials	50T	15mm	—	—	.015"	.031"	2,240	SH01W	792299-8
16-5/16"	General Purpose	50T	1"	Chisel	20°	.062"	.093"	2,760	5402NA	792116-8

