

# Simmons



## CERTIFIED LEAD FREE 4800LF Series Premier Frost-Proof Yard Hydrant


- 3/4" NPT Female Inlet
- 3/4" Male Hose Thread Outlet
- All components are identical to 800LF Series except head casting and handle are smaller. Does not have flow lock wheel.
- Polyester powder coated finish.
- Max. Pressure: 120 PSI
- Individually boxed.
- Refer to 3/4" Flow Rate Chart...Page 23.
- Yard hydrant accessories... See page 27.

Part No.	Bury Depth	Weight Each lbs.
4800LF	1	11.2
4801LF	1 1/2	12.6
4802LF	2	13.6
4803LF	3	15.9
4804LF	4	18.1
4805LF	5	20.6
4806LF	6	23.0
4807LF	7	25.4
4808LF	8	27.8



Certified by Truesdail Laboratories. Meets all Federal and state Safe Drinking Water Acts and requirements. **Does not meet California Prop. 65 (Environmental Law)**

NSF/ANSI 372

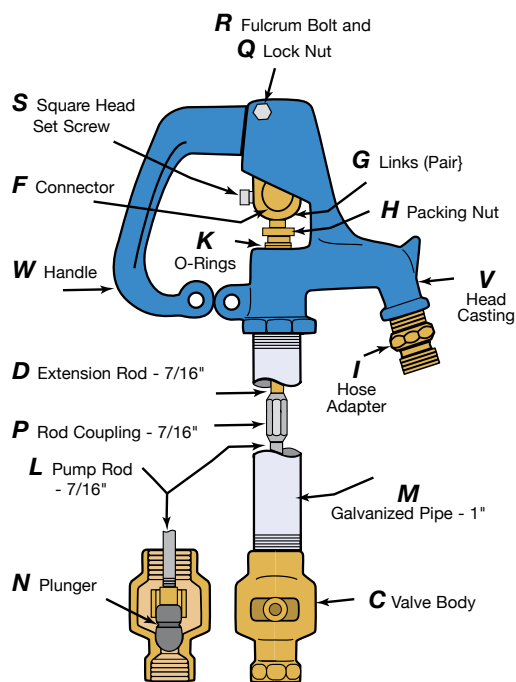

## CERTIFIED LEAD FREE 4800LF Series Yard Hydrant Parts

Part Ref. No.	Name of Part
850SB	Parts Kit
890	Head Complete
V 8891	Head
W 8892	Handle
C 8822SB	Valve Body
D 8843	Extension Rod 7/16"
F 8825•	Brass Connector
G 8826•	Brass Links (Price per Pair)
H 8847•	Brass Packing Nut
I 8844	Hose Adapter
K 8839•	Buna-N "O" Rings (Price per Pair)
L 8814	Pump Rod, 7/16"
M 8815	Galvanized Pipe Casing, 1"
N 8842•	Plunger (One Piece)
P 8834	Rod Coupling, 7/16"
R 8301•	Stainless Steel Lock Nut
R 8836•	Fulcrum Bolt Stainless Steel
S 8837•	Square Head Set Screw Stainless

•Included in Parts Kit.



**Simmons  
Superior  
Packaging**



**Parts Kit**

MADE IN U.S.A.

# HYDRANTS