



Satisfy Professional's Needs

## Corded and Cordless LED Worklight DML805


**LXT**  
LITHIUM-ION

Powered by both

# AC and DC

**18V**  
LITHIUM-ION

**144V**  
LITHIUM-ION

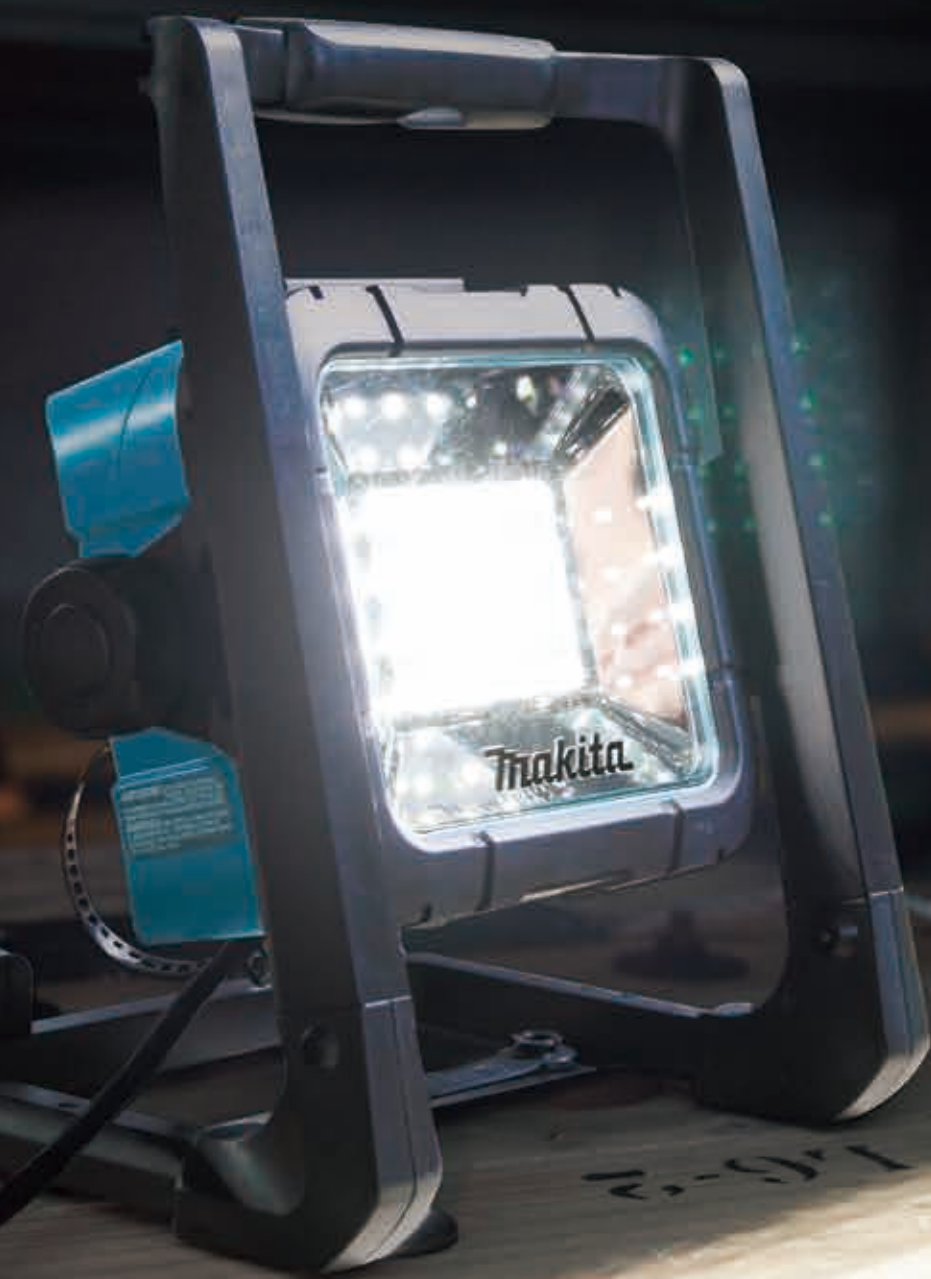

# Twenty 0.5W white-light LEDs deliver bright and even light.



Carrying handle for easy transport that also serves as a hanging hook

High/Low/Off power switch

Knob for free adjustment of light angle enables the light source to rotate vertically through 360° in a desired direction.

Can be mounted on:

- Optional Makita tripod for DML805
- Standard camera tripod

AC cord can be stored around the hooks.

**Powered by both...**

**AC**



**DC**

**18V LITHIUM-ION**

**14.4V LITHIUM-ION**

Battery is option




## Optional accessories



### Makita tripod

Up to two DML805's can be mounted.  
Height : 992-1,750mm  
Set Screw : M8  
Part No. GM00001381



### Vise

Use for mounting DML805 on a scaffolding pipe, etc.  
Set Screw : M8  
Part No. GM00001396



### Anti-glare film


Part No. A-58154



## Battery capacity warning function

automatically notifies the user about reduction in battery capacity by reducing the brightness of light in the following steps.  
Only one LED is on as drawn below. (This will continue about 13 minutes in case of using battery BL1815N.)

1. Full brightness, with all twenty LEDs on
2. Only one LED is on as drawn below. (This will continue about 10 minutes in case of using battery BL1815.)
3. All twenty LEDs turn off.



All twenty LEDs on



Only one LED is on

Light source				
Illuminance (lx)		Luminous flux (lm)		Type
High	1,150	High	750	LED
Low	750	Low	450	20x 0.5W

## Continuous use

	 BL1815N	 BL1820	 BL1830	 BL1840	 BL1850	 BL1415	 BL1430	 BL1440
Low	5.0h	7.0h	10h	13h	17h	3.0h	6.0h	8.0h
High	2.5h	3.5h	5.0h	6.5h	8.5h	1.5h	3.0h	4.0h
Charging time	15min	24min	22min	36min	45min	15min	22min	36min
DC18RC 								

## Cordless and Cordless LED Worklight

### DML805 AC or 18V, 14.4V



Dimensions (L x W x H)	214x261x328mm (8-3/8"x10-1/4"x12-7/8")
Net weight*	2.3kg (5.2lbs) with BL1415 2.6kg (5.8lbs) with BL1850

\*weight according to EPTA-Procedure 01/2003  
Battery and charger are sold separately.

Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BF-AH