

KONA PORCELAIN ENAMEL 54" X 30" X 15 1/4" BATHTUB



O11-2302 RH DRAIN, SLIP RESISTANT LH DRAIN, SLIP RESISTANT

DESCRIPTION:

The Kona is a $54" \times 30" \times 15 1/4"$ bathtub - designed for space saving convenience. The Kona bathtub has a traditional design with a standard "straight" back support. Construction is one piece heavy gauge seamless steel with an acid resistant porcelain enamel finish. The Kona weighs 63 lbs., easy to transport and install into a bathtub alcove "just set it and level it". The full length support pad offers added strength and sound deadening. This product is compatible or complies with ASME A112.19.1/CSA B45.2 (Standard for Enameled Steel Plumbing Fixtures), ADA (American Disabilities Act), ASTM F 462 (Safety Specification for Slip Resistant Bathing Facilities), WW-P 541 (U.S. Military Federal Specification), HUD-FHA-VA, LEED, and the Buy American Act, as applicable when installed accordingly. Available in white, bone and biscuit colors with a right and left drain. Made in the USA. Weight: 63 lbs



1400 Park Street • P.O. Box 18010 • Evansville, IN 47719-1010 • (812) 423-5401 • Fax (812) 429-2254 • www.bootz.com • webmaster@bootz.com



KONA PORCELAIN ENAMEL 54" X 30" X 15 1/4" BATHTUB


KONA 41/2' Bathtub


54" x 30" x 15 1/4"


Standard Outlet

011-2302 RH Drain, slip resistant 011-2303 LH Drain, slip resistant

(

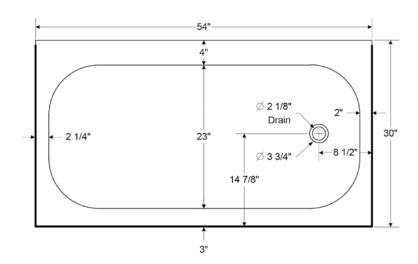

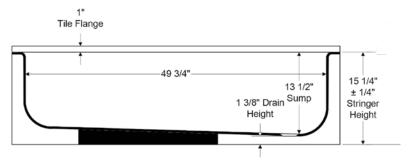





1400 Park Street • P.O. Box 18010 • Evansville, IN 47719-1010 • (812) 423-5401 • Fax (812) 429-2254 • www.bootz.com • webmaster@bootz.com

Complies with:

All fixtures are compatible or comply with ANSI, ASME, CSA, WW-P 541, HUD-FHA-VA, LEED and the "Buy America Act" where applicable when installed accordingly.

Standard Features:

"The affordable alternative to cast iron" Full length sound deadening pad Slip resistant bottom Set it and level it

Made in the USA

All Dimensions +\- 1/8" unless otherwise noted.

Dimensions shown are for reference.

Actual dimensions may vary slightly and
should be checked prior to installation

SS 5/14



