


Submitted Model No.:\_\_\_\_\_\_Specific Features:

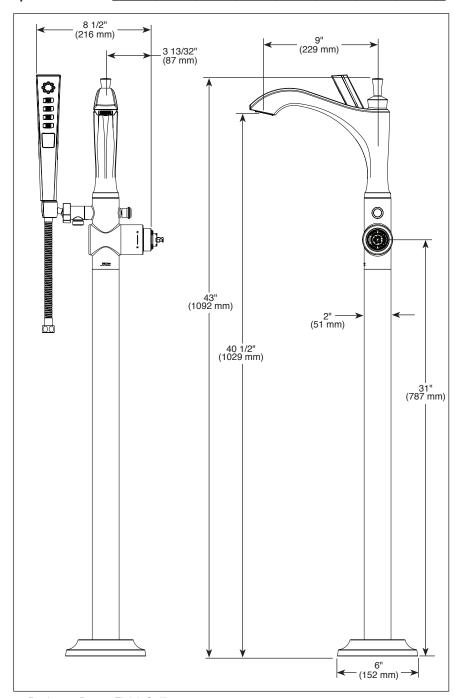

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-T4756-LHP-FL Rev. A



see what Delta can do™

## FLOOR MOUNT TUB FILLER

■ Dorval<sup>™</sup> Floor Mount Tub Filler

## **STANDARD SPECIFICATIONS:**

- Hand shower maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Solid brass construction
- Hot and cold indicators
- Fixed spout
- 60"-80" stretchable hose with metal fittings
- Auto resetting diverter
- Three-setting H<sub>2</sub>Okinetic<sup>®</sup> hand shower with dual check valves
- Pause, H<sub>2</sub>Okinetic® Spray, Massage Spray
- Pivot hand shower holder
- Optional pressure balance cartridge (RP46074) available
- Must order rough R4700-FL or R4700-FLWS
- Order handle separately. Coordinating handle options include H566▲ and H567▲.

## **WARRANTY**

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5
  years from the date of purchase; or for commercial
  purchasers, 1 year from the date of purchase. No
  warranty is provided on batteries.

## **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense<sup>® -</sup> Applies to hand shower only-59799▲-PK

**Delta Faucet Company** 

55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2019 Delta Faucet Company