

**2600TTW**  
Through-The-Wall Air Conditioner



**GREE**

# 2600TTW

## WHEN COMFORT IS YOUR TOP PRIORITY

Some choices are easier than others— Comfort should always be your top priority. When you choose the GREE T2600 air conditioner, indoors is always your favorite place to be. You know it's undoubtedly working round the clock to keeping your living space refreshed, comfortable, and doing so with exceptional energy efficiency. The unit operates quietly leaving you cool and rested, and not to mention the T2600 air conditioner's clean, contemporary looks fits in with any décor.

### MAXIMUM EFFICIENCY

The T2600 for energy efficiency levels that will help lower electric bills.

- Electronic Setpoint Limits - The T2600 allows property owners to set room temperature limits to prevent over heating or cooling and save money.
- Fan Cycle/Continuous - The T2600 allows users to program the fan operation to stay running for maximum comfort or run only when the compressor or heater is running for reduced operating cost.
- Compressor start/stop time guard - The T2600 has a 3-minute time guard safety to prevent harmful rapid cycling of the compressor.
- Power Failure Recovery remembers and restarts the unit to the setting prior to loss of power.
- Adjustable three-speed fan - More comfort options for guests to choose from to maximize their room comfort.

### SUPER QUIET OPERATION

- Aero-Quiet Indoor Blower Wheel provides quiet and consistent airflow for maximum guest comfort. Dual Motor Technology provides ultra-quiet operation that won't disturb you during the day or night.

### AESTHETIC AND DURABLE DESIGN

- The unit's sleek design, with clean and modern lines blends well with any room décor. In addition, the robust metal construction guarantees a long product life.

### EASY OPERATION

- Digital thermostat touch-pad control panel provides a simple to operate control.



- No guess work with the easy to read LED display with large numbers.
- Directional Airflow- The T2600 provides adjustable airflow control for optimal temperature control and the ultimate in comfort. The discharge airflow can be easily directed toward any location in your room.

### TROUBLE-FREE INSTALLATION AND MAINTENANCE

- The T2600 has the industry standard size of 26" x 15 5/8" designed to easily be installed in most standard wall sleeves.
- Polymer Air Filter - Easy-out front access easy-to-clean filters make maintenance a breeze.
- Air Filter Alarm- The controls monitors runtime and automatically notifies you when it's time to clean the air filter.

### ENVIRONMENTALLY SOUND

- The T2600 is an eco-conditioner utilizing environmentally friendly R410A Refrigerant which meets the 2010 U.S. Environmental Protection Agency regulations.





## 5-YEAR PERFORMANCE GUARANTEE

- All T2600 are protected by Gree's five-year limited Performance Guarantee.
- 1st year parts & labor limited warranty on entire unit.\*
- 2nd-5th years parts & labor limited warranty on Sealed Refrigeration System.\*
- Gree will repair or replace any factory defective part or sealed system leak caused by a defective part. See full product warranty for complete details.

\* Complete warranty details available from your local dealer or at [www.GREE-TTW.com](http://www.GREE-TTW.com)

## REMOTE CONTROL

- Our easy to use remote control provides all the comfort at the user's fingertips:
- User-friendly infrared control provides access to a variety of features designed to enhance room comfort.
- Mode Selection – Select cooling, heating (on selected models) or fan only operating mode with a single button..
- Temperature Selection – Adjust the room temperature up or down to meet your comfort level.
- Fan Speed Selection – Set the unit fan speed (Low, Medium or High) according to your preference.
- Timer Mode – Program the unit to turn on or off for your busy schedule. The time period can be set from 0.5 to 24 hours.
- Privacy Lock – The optional remote control lock prevents unauthorized access to the unit controls and prevents tampering with system settings.




## WALL SLEEVE (Sold Separately) 26TTWSLEEVE

- Heavy duty galvanized steel wall sleeve.
- Durable powder coat paint finish to provide maximum corrosion protection.
- Polymer gasket surrounds opening to assure for a weather-tight seal.
- Industry standard wall sleeve size.
- Aluminum decorative stamped outdoor grille.
- Includes copper drain tube.





## Architectural Aluminum Exterior Louver / Grille (Sold Separately) 26TTW-GRILLE-ALU-CLEAR

- Heavy duty extruded clear aluminum.
- Decorative design.
- Designed with integrated air deflection baffles.
- Replaces Gree supplied stamped outdoor grille.
- Compatible with Gree supplied drain tube.
- Available in custom colors.



Model No.	Voltage 1-ph, 60 Hz	Cooling				Heating					
		Capacity (BtuH)	Current (Amps)	Power (Watts)	EER	Moisture Removal (Pts/Hr)	Capacity (BtuH)	Rev. Cycle (Amps)	Electric Heating (Amps)	Power (Watts)	COP
Cooling Only											
26TTW09AC115V1A	115V	9300	8.70	950	9.8	2.32	na	na	na	na	na
26TTW12AC115V1A	115V	11800	11.00	1200	9.8	3.49	na	na	na	na	na
26TTW09AC230V1A	208/230V	9100/9300	4.7/4.3	930/950	9.8/9.8	2.32	na	na	na	na	na
26TTW12AC230V1A	208/230V	11800/12000	6.1/5.7	1200/1220	9.8/9.8	3.49	na	na	na	na	na
Cooling with Electric Heat											
26TTW09HC230V1A	208/230V	9100/9300	4.7/4.3	930/950	9.8/9.8	2.32	9000/11000	na	15.2/14.0	2900/3500	na
26TTW12HC230V1A	208/230V	11800/12000	6.1/5.7	1200/1220	9.8/9.8	3.49	10600/8600	na	15.2/14.0	2900/3500	na
Heat Pumps											
26TTW09HP115V1A	115V	9000	8.40	920	9.8	2.32	8500	7.6	11.0	830	3.0
26TTW09HP230V1A	208/230V	9100/9300	4.8/4.4	940/960	9.7/9.7	2.32	8600/8800	4.3/4.0	15.2/14.0	840/860	3.0/3.0
26TTW12HP230V1A	208/230V	11500/11700	6.1/5.6	1200/1220	9.6/9.6	3.49	11200/11400	5.9/5.4	15.2/14.0	1140/1160	2.9/2.9
26TTW07HP230V1A	208/230V	7200/7400	3.5/3.2	680/700	10.6/10.6	1.37	6600/6800	3.2/2.9	15.2/14.0	620/640	3.1/3.1

Model No.	Plug Configuration (NEMA#)	Power Cord Length (inch)	Air Flow CFM (H/M/L)	Unit Width (inch)	Unit Height (inch)	Unit Depth (inch)	Net Weight (lbs)	Ship Weight (lbs)
Cooling Only								
26TTW09AC115V1A	NEMA5-15P	96	282/258/235	26.0	15.6	21.2	87	74
26TTW12AC115V1A	NEMA5-15P	96	282/258/235	26.0	15.6	21.2	93	80
26TTW09AC230V1A	NEMA6-15P	72	282/258/235	26.0	15.6	21.2	84	71
26TTW12AC230V1A	NEMA6-15P	72	282/258/235	26.0	15.6	21.2	92	78
Cooling with Electric Heat								
26TTW09HC230V1A	NEMA6-20P	72	270/247/223	26.0	15.6	21.2	86	73
26TTW12HC230V1A	NEMA6-20P	72	270/247/223	26.0	15.6	21.2	94	81
Heat Pumps								
26TTW09HP115V1A	NEMA5-15P	96	270/247/223	26.0	15.6	21.2	91	78
26TTW09HP230V1A	NEMA6-20P	72	270/247/223	26.0	15.6	21.2	99	86
26TTW12HP230V1A	NEMA6-20P	72	270/247/223	26.0	15.6	21.2	96	83
26TTW07HP230V1A	NEMA6-20P	72	270/247/223	26.0	15.6	21.2	89	76

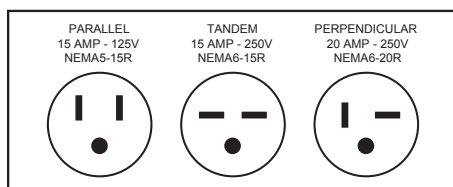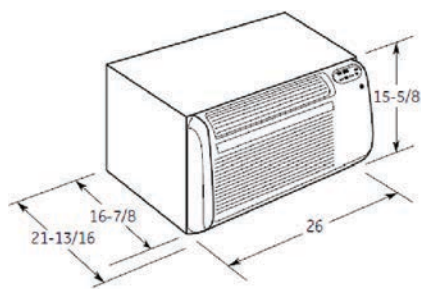

For more details visit us at [www.GREE-TTW.com](http://www.GREE-TTW.com)  
Toll Free: 1-866-239-4440  
Email: [etac@carrierenterprise.com](mailto:etac@carrierenterprise.com)



Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or change at any time, specifications or designs without notice or without incurring obligations.

©2014 All rights reserved.

Cat No. GREE\_T2600\_BROCHURE\_112717