American Standard

Fluent®
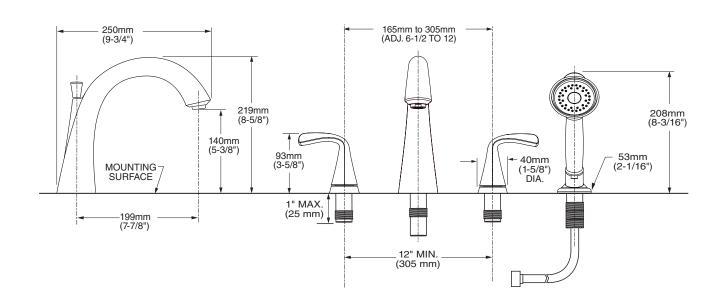## Roman Tub Filler Trim

MODEL NUMBER:

❏ **T186900 Roman Tub Filler Trim**
LESS Personal Shower

❏ **T186901 Roman Tub Filler Trim**
WITH Personal Shower

For use with Flash™ rough valves

250mm (9-3/4")
219mm (8-5/8")
140mm (5-3/8")
MOUNTING SURFACE
199mm (7-7/8")

165mm to 305mm (ADJ. 6-1/2 TO 12)
93mm (3-5/8")
1" MAX. (25 mm)
40mm (1-5/8") DIA.
53mm (2-1/16")
208mm (8-3/16")
12" MIN. (305 mm)

GENERAL DESCRIPTION:

Installs with Flash rough valve platform. Washerless 1/4 turn ceramic disc valve cartridges. Durable brass spout. Metal lever handles. Trim kit provides an additional 1" installation adjustability for finished deck.

PRODUCT FEATURES:

Brass Construction: Durable. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

SUGGESTED SPECIFICATION

Two handle deck-mount tub filler shall feature cast brass construction. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # T18690_.___.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1
CSA B125.1

Check local plumbing codes.
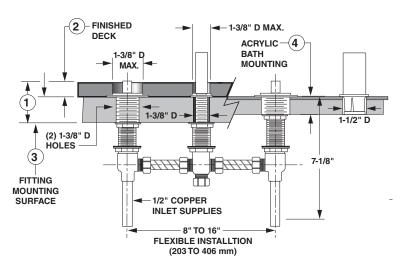**Some installations may require a vacuum breaker.**

FLOW RATE* ■ Spout

GALLONS PER MINUTE / INLET PRESSURE (PSI)

*Flow rates shown are for mixed hot and cold.

TUB SPOUT FLOW

FLOW RATE*

GALLONS PER MINUTE / INLET PRESSURE (PSI)

*Flow rates shown are for mixed hot and cold.

HAND SHOWER FLOW

Product Number	Description		Finish Options		
			Polished Chrome	Brushed Nickel	Legacy Bronze
			002	295	278
T186900	Roman Tub Filler Trim LESS Personal Shower. ADA				
T186901	Roman Tub Filler Trim WITH Personal Shower. CEC ADA				

ADA Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

❏ **R900 Flash Roman Tub Filler**
   Rough Body – Less Personal Shower

❏ **R910 Flash Roman Tub Filler**
   Rough Body – WITH Personal Shower

1. DECK THICKNESS
   TOTAL DECK THICKNESS UP TO 2-1/2"

2. FINISHED DECK
   FINISHED DECK VARIABILITY ACCOMMODATES DECKING MATERIAL (TILE, MARBLE, CORIAN®...) TO 1" THICK

3. FITTING MOUNTING SURFACE
   ADJUSTABILITY, TO 1-1/2" THICK

4. ACRYLIC BATHS
   ADJUSTABILITY, TO 1-1/2" THICK

② FINISHED DECK

1-3/8" D MAX.

ACRYLIC BATH MOUNTING ④

1-3/8" D MAX.

① 1-3/8" D

1-1/2" D

(2) 1-3/8" D HOLES

③ FITTING MOUNTING SURFACE

1/2" COPPER INLET SUPPLIES

7-1/8"

8" TO 16" FLEXIBLE INSTALLTION (203 TO 406 mm)

1" D   (2) 1-3/8" D HOLES

8" TO 16" FLEXIBLE INSTALLTION (203 TO 406 mm) DECK MOUNTING HOLES

(8/18)