



DRIVEN TO OUTPERFORM.™

M12 FUEL™ is engineered for the most demanding tradesmen in the world. M12 FUEL™ delivers unrivaled performance in a compact structure and features three MILWAUKEE® exclusive innovations – the POWERSTATE™ Brushless Motor, REDLITHIUM™ Battery Pack and REDLINK PLUS™ Intelligence Hardware and Software – that deliver unmatched power, run-time and durability.


Simply put, M12 FUEL™ is best-in-class, full-circle technology that drives, protects and powers your cordless tools beyond the rest.

M12 FUEL

LONGER
MOTOR LIFE


MORE
POWER

MORE
RUN-TIME

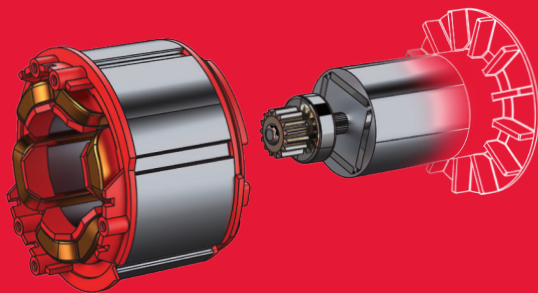

1 POWERSTATE™ BRUSHLESS MOTOR

- MILWAUKEE® Designed and Built Brushless Motor
- Outperforms All Leading Competitors
- Up to 10X Longer Motor Life



2 REDLINK PLUS™ INTELLIGENCE

- Most Advanced Electronic System on the Market for Maximum Performance
- Total System Communication with Overload Protection Increases Tool Life
- Built-In Fuel Gauge Displays Remaining Charge



3 REDLITHIUM™ CP2.0 & XC4.0 BATTERY PACKS

- Up to 2X More Run-Time
- Up to 20% More Power
- Over 2X More Recharges than Leading Competitors
- Operates Below -18°C / 0°F



M12

**PORTABLE PRODUCTIVITY
TRADE FOCUSED
SYSTEM WIDE**

M12 FUEL

1/2" Hammer Drill/Driver Kit

2504-22 (2504-20 Tool-Only)

Specifications:

Peak Torque	350 in-lbs
RPM	0 – 1,700
BPM	0 – 25,500
Chuck Type	1/2" Metal Single Sleeve – Ratcheting Chuck
Length / Weight	6.6" / 2.3 lbs

Includes: (1) M12™ REDLITHIUM™ XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Carrying Case



M12™ 3/8" Right Angle Drill/Driver Kit

2415-21 (2415-20 Tool-Only)

Specifications:

Peak Torque	100 in-lbs
RPM	0 – 800
Clutch Settings	11 Settings plus Drill Mode
Chuck Type	3/8" Single Sleeve
Head Profile	3.8"
Weight	2.4 lbs

Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, Charger, Soft Carrying Case



M12™ 3/8" Hammer Drill/Driver Kit

2408-22 (2408-20 Tool-Only)

Specifications:

Peak Torque	275 in-lbs
RPM	0 – 400 / 0 – 1,500
BPM	0 – 22,500
Chuck Type	3/8" Metal Single Sleeve
Length / Weight	7.5" / 2.7 lbs

Includes: (2) M12™ REDLITHIUM™ CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case



M12 FUEL

1/4" Hex 2-Speed Screwdriver Kit

2402-22 (2402-20 Tool-Only)

Specifications:

Peak Torque	325 in-lbs
RPM	0 – 450 / 0 – 1,700
Chuck Type	1/4" Hex Quick Change
Length / Weight	6.6" / 2.0 lbs

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case



M12 FUEL

1/2" Drill/Driver Kit

2503-22 (2503-20 Tool-Only)

Specifications:

Peak Torque	350 in-lbs
RPM	0 – 1,700
Chuck Type	1/2" Metal Single Sleeve – Ratcheting Chuck
Length / Weight	6.6" / 2.3 lbs

Includes: (1) M12™ REDLITHIUM™ XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Carrying Case



M12™ 1/4" Hex 2-Speed Screwdriver Kit

2406-22 (2406-20 Tool-Only)

Specifications:

Peak Torque	275 in-lbs
RPM	0 – 400 / 0 – 1,500
Chuck Type	1/4" Hex Quick Change
Length / Weight	6.8" / 1.8 lbs

Includes: (2) M12™ REDLITHIUM™ CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case



M12 FUEL

Installation Drill/Driver Kit

2505-22 (2505-20 Tool-Only)

Specifications:

Max Torque	300 in-lbs
RPM (2-Mode)	0 – 400 / 0 – 1,600
Attachments	3/8" Metal Chuck, 1/4" Hex, Offset and Right Angle
Length / Weight	5.1" / 2.0 lbs

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, (4) Attachments (3/8" Metal Chuck, 1/4" Hex, Offset and Right Angle), Belt Clip, Charger, Compartmentalized Contractor Bag



M12™ 3/8" Drill/Driver Kit

2407-22 (2407-20 Tool-Only)

Specifications:

Peak Torque	275 in-lbs
RPM	0 – 400 / 0 – 1,500
Chuck Type	3/8" Metal Single Sleeve
Length / Weight	7.4" / 2.5 lbs

Includes: (2) M12™ REDLITHIUM™ CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case



M12 FUEL

1/4" Hex Impact Driver Kit

2553-22 (2553-20 Tool-Only)

Specifications:

Fastening Torque	1,300 in-lbs
IPM	0 – 4,000
RPM	0 – 3,300
Chuck Type	1/4" Hex Quick Change
Length / Weight	5.1" / 1.8 lbs

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case



M12 FUEL

SURGE™ 1/4" Hex Hydraulic Driver Kit

2551-22 (2551-20 Tool-Only)

Specifications:

Sustained Fastening Torque	450 ft-lbs
IPM	0 – 3,400
RPM	0 – 3,200
Chuck Type	1/4" Hex Quick Change
Length / Weight	5.2" / 2.4 lbs

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, Belt Clip, Charger, Contractor Bag



M12™ 1/4" Hex Impact Driver Kit

2462-22 (2462-20 Tool-Only)

Specifications:

Fastening Torque	1,000 in-lbs
IPM	0 – 3,300
RPM	0 – 2,500
Chuck Type	1/4" Hex
Length / Weight	6.5" / 2.3 lbs

Includes: (2) M12™ REDLITHIUM™ CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case



M12™ 1/4" Hex Right Angle Impact Driver Kit

2467-21 (2467-20 Tool-Only)

Specifications:

Fastening Torque	600 in-lbs
IPM	0 – 3,300
RPM	0 – 2,450
Chuck Type	1/4" Hex
Head Profile	1.4"
Weight	2.6 lbs

Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, Charger, Soft Carrying Case



M12 FUEL

1/2" Stubby Impact Wrench Kit

2555-22, 2555P-22 (2555-20 Tool-Only)

Specifications:

Peak Torque	250 ft-lbs
IPM	0 – 3,200
RPM	0 – 2,700
Anvil Type	1/2" Friction Ring
Length / Weight	4.9" / 2.1 lbs

Includes: 2555-22 1/2" Stubby Impact Wrench; 2555P-22 1/2" Stubby Impact Wrench w/ Pin Detent; **All Kits Include:** (1) M12™ REDLITHIUM™ XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Soft Carrying Case



M12 FUEL

3/8" Stubby Impact Wrench Kit

2554-22 (2554-20 Tool-Only)

Specifications:

Peak Torque	250 ft-lbs
IPM	0 – 3,200
RPM	0 – 2,700
Anvil Type	3/8" Friction Ring
Length / Weight	4.8" / 2.1 lbs

Includes: (1) M12™ REDLITHIUM™ XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Soft Carrying Case



M12 FUEL

1/4" Stubby Impact Wrench Kit

2552-22 (2552-20 Tool-Only)

Specifications:

Peak Torque	100 ft-lbs
IPM	0 – 4,300
RPM	0 – 3,200
Anvil Type	1/4" Friction Ring
Length / Weight	5.1" / 1.8 lbs

Includes: (1) M12™ REDLITHIUM™ XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Soft Carrying Case



M12 FUEL

3/8" Impact Wrench Kit

2454-22 (2454-20 Tool-Only)

Specifications:

Peak Torque	117 ft-lbs
IPM	0 – 3,500
RPM (2-Mode)	0 – 1,200 / 0 – 2,650
Anvil Type	3/8" Friction Ring
Length / Weight	6.5" / 2.4 lbs

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case



M12™ 3/8" Impact Wrench Kit

2463-22 (2463-20 Tool-Only)

Specifications:

Peak Torque	100 ft-lbs
IPM	0 – 3,300
RPM	0 – 2,500
Anvil Type	3/8" Friction Ring
Length / Weight	6.5" / 2.3 lbs

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case



M12™ 1/4" Impact Wrench Kit

2461-22 (2461-20 Tool-Only)

Specifications:

Peak Torque	38 ft-lbs
IPM	0 – 3,800
RPM	0 – 2,500
Anvil Type	1/4" Friction Ring
Length / Weight	6.0" / 2.1 lbs

Includes: (2) M12™ REDLITHIUM™ CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case

