

► **Code Number**

3142400

► **Description**

Exposed Urinal Flushometer for 1¼" top spud urinals. Especially suited for harsh water conditions.

► **Flush Cycle**

Valve Adjustment Range: 0.5 gpf/1.7 Lpf to 3.0 gpf/11.4 Lpf

- 1.0 gpf/3.8 Lpf

► **Specifications**

Quiet, Exposed, Adjustable Piston Type, Chrome Plated Urinal Flushometer with the following features:

- Trap Primer
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Vacuum Breaker Flush Connection
- Self-cleaning Xpelor® Bypass
- Stamped Wall Flange
- Ultra High Copper, Low Zinc Brass Castings for Dezincification and Salt Water Resistance
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX® Rubber Compound for Chloramine Resistance
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Spud Coupling and Flange for 1 1/4" Top Spud

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.


► **Variations**

- 1½" Flush Connection"
- Less Vacuum Breaker
- Sweat Solder Adapter Kit
- Sweat Solder Adapter & Cast Wall Flange with Set Screw
- Ground Joint Stop and Tailpiece

NOTE: Bak-Chek® Angle Stop available with 1" Whitworth Thread (please specify).

► **Accessories (Sold Separately)**

See Accessories Section of the Sloan catalog for available accessories

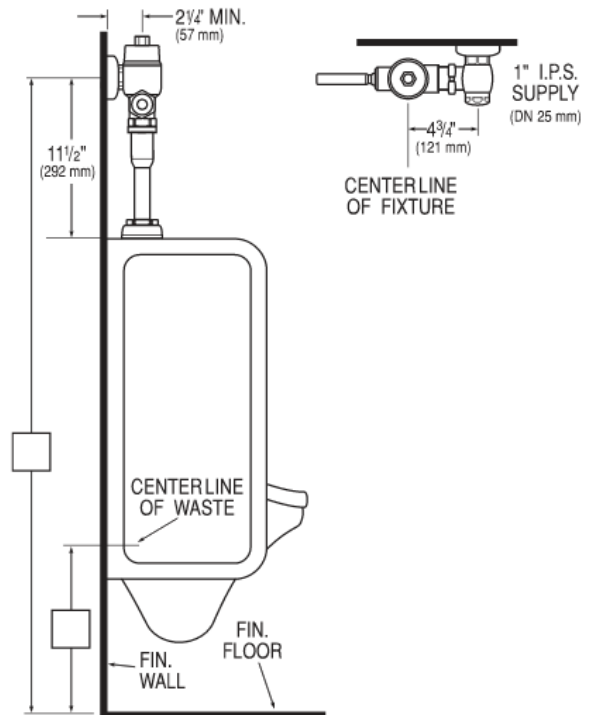

► **Compliance & Certifications**



This space for Architect/Engineer Approval