

NEOREST® WX2 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

FEATURES

NEOREST WX2

- Ultra high-efficiency TORNADO FLUSH® system -1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Auto flush - with back-up manual flush for power outages
- Auto open/close lid
- PREMIST® automatically mists the bowl before each use
- ACTILIGHT® CLEAN LIGHT technology built into the lid
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height
- Gentle aerated, warm water, dual-action spray with oscillating and pulsating features
- Instantaneous water heater for continuous warm water and energy savings
- Adjustable spray position, water temperature, and water pressure
- EWATER+® auto-cleans wand, bowl, and under-seat after every use
- Heated seat with temperature control
- Seamless seat design eliminates the gap where dirt collects
- Warm air dryer with five variable temperature settings
- Automatic air deodorizer
- Automatic and programmable energy saving systems
- Multifunction ergonomic stick-style remote control
- 4-users' personalized memory settings
- ADA compliant
- Night light

NEOREST In-Wall Tank Unit

- Ultra high-efficiency dual flushing system - 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF)
- Adjustable 15"-19" mounting height
- Supports up to 880 lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- Copper pipe supply line

MODELS

- **CT9548CEFX#01**
Bowl Unit
- **SN9548MX#01**
Top Unit
- **WT175MA**
In-Wall Tank System (Copper Pipe)
- **YT990#N**
Nickel Push Plate



-  **ACTILIGHT**
-  **EWATER+**
-  **TORNADO FLUSH**
-  **Auto Flush**
-  **CEFIONTECT**
-  **SD Skirted Design**
-  **UNIVERSAL HEIGHT**

COLORS/FINISHES

- #01 Cotton

CODES/STANDARDS

- Meets and exceeds:
 - Bowl/Seat: ASME A112.19.2/CSA B45.1, ASME A112.19.14, ASME A112.4.2/CSA B45.16, UL 1431 CSA C22.2 series
 - Carrier System: ASME A112.6.2
 - Tank Trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when seat height is between 17" and 19"
- Complies with CA Prop 65 warning requirements



CWT9548CEMFX

NEOREST® WX2 Wall-Hung Toilet - 1.2 GPF / 0.8 GPF

SPECIFICATIONS

CT9548CEFX	
Water Use	1.2 / 0.8 GPF (4.5 / 3.0 LPF)
Flush System	TORNADO FLUSH®
Water Pressure	Minimum: 7.25 PSI (Dynamic) Maximum: 108.75 PSI (Static)
Water Surface	5-5/8" x 4-1/8"
Trap Diameter	2-1/4"
Trap Seal	2"
Warranty	Three Year Limited (Residential) One Year Limited (Commercial)
Material	Bowl Unit: Vitreous China Top Unit: Plastic
Shipping Weight	88.4 lbs
Shipping Dimensions	31-1/4" x 18-3/8" x 19-1/4"

SN9548MX	
Power Rating	AC 120 V 60 Hz
Power Consumption	1294 W
Max Power Consumption	1452 W
Power Cord Length	1.6 ft (0.5 m)
Spray Volume	Rear Cleansing: 0.08 – 0.11 gal/min Rear Soft Cleansing: 0.08 – 0.11 gal/min Front Cleansing: 0.08 – 0.11 gal/min Wide Front Cleansing: 0.09 – 0.11 gal/min
Spray Features	Adjustable Water Temp: 86 – 104 °F (30 – 40 °C) Safety Device: Temperature Fuse
Warm Air Dryer Features	Adjustable Air Temp: 95 – 140 °F (35 – 60 °C) Airflow Volume: 8.83 ft ³ /min (0.25 m ³ /min) Safety Device: Temperature Fuse
Heated Seat Features	Adjustable Surface Temp: 82 – 97 °F (28 – 36 °C) Safety Device: Temperature Fuse
Ambient Temperature	32 – 104 °F (0 – 40 °C)
Shipping Weight	28.7 lbs
Shipping Dimensions	31-1/4" x 20-5/8" x 9-7/8"


WT175MA	
Water Use	1.2 / 0.8 GPF (4.5 / 3.0 LPF)
Flush System	Dual Flushing
Min Water Pressure	8 PSI (static)
Max Water Pressure	108.75 PSI (static)
Installation Height	15" to 19"
Warranty	One Year Limited
Material	Various
Shipping Weight	44 lbs
Shipping Dimensions	47-1/4" x 26-3/16" x 5-7/8"

PRODUCT SPECIFICATION

The NEOREST WX2 with the TORNADO FLUSH system toilet shall be 1.2 GPF / 0.8 GPF (4.5 LPF / 3.0 LPF). Toilet shall have ACTILIGHT cleaning light cleaning system, CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model CWT9548CEMFX#01.

DIMENSIONS

CT9548CEFX

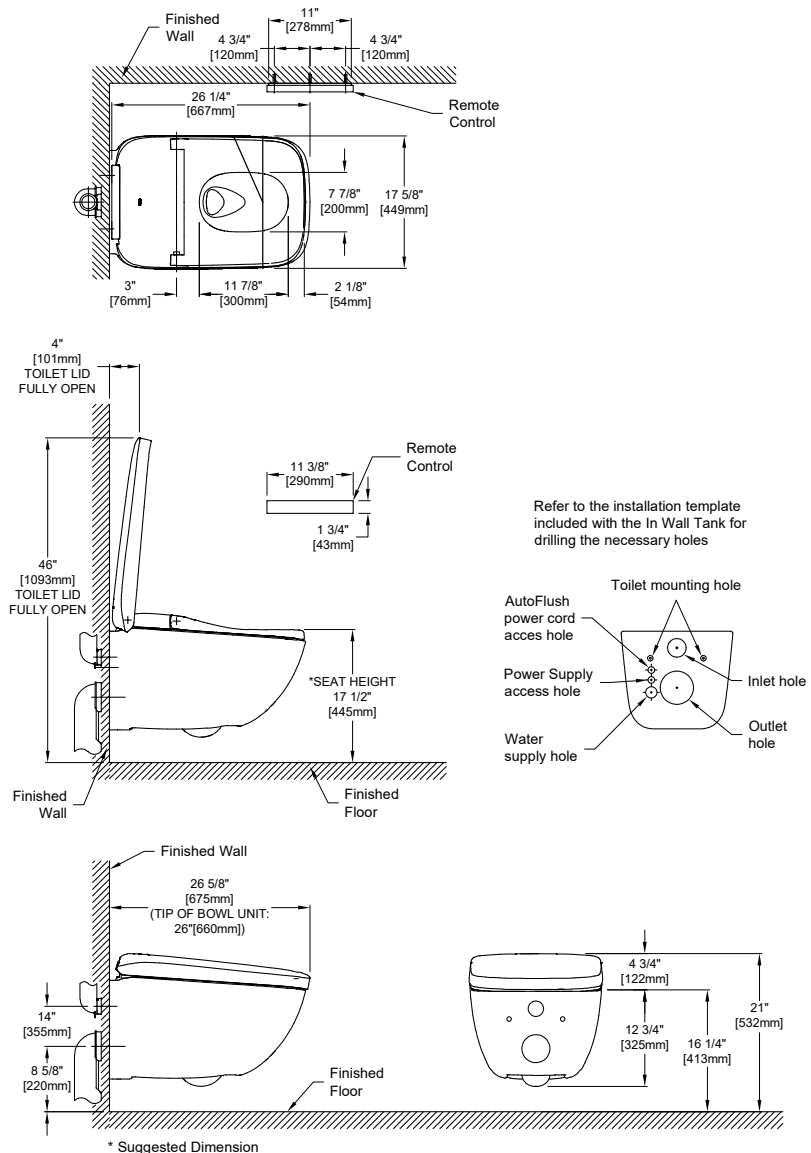

Refer to the installation template included with the In Wall Tank for drilling the necessary holes