

DESCRIPTION

Complete rear spud ADA compliant floor mount vitreous china water closet.

Flush Cycle

Model ST-2030-1.28 (1.28 gpf/4.8 Lpf)



SPECIFICATIONS

Water Closet


- Floor mount vitreous china
- Siphon jet flushing action
- ADA compliant
- 1½" I.P.S. rear spud inlet
- 2 1/8" trapway diameter
- Mounting hardware, carrier and toilet seat not included
- Integral flushing rim
- Elongated bowl
- Water spot area 9 1/2" x 8 1/4"
- ASME A112.19.2/CSA B45.1

Colors/Finishes

- White

Recommended Accessories

- Compatible with toilet seat models:
 Olsonite 10CT
 Bemis 1955 CT
 Church Commercial 295CT

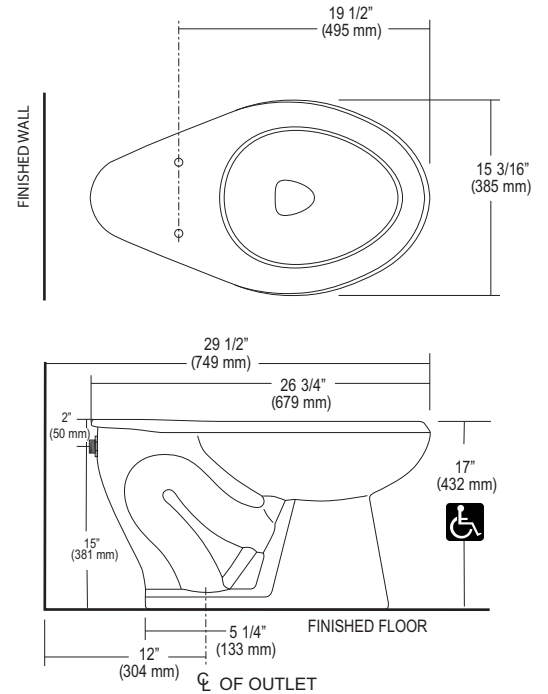

Product Specification

Elongated water closet shall be made of vitreous china with a 1½" rear spud inlet. Bowl shall be installed at required height of 17" from floor to top of fixture for ADA compliance. Water closet shall be floor mounted with rear spud. Water Closet shall use 1.28 gpf / 4.8 Lpf. Water Closet shall be Sloan Model ST-2030-1.28.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.



NOTE: Plumbing System Requirements

- √ Minimum **Flowing** Pressure: 25 PSI
- √ Minimum Flow Rate: 18 GPM

| This space for Architect/Engineer approval | |
|--|----------|
| Job Name | Date |
| Model Specified | Quantity |
| Variations Specified | |
| Customer/Wholesaler | |
| Contractor | |
| Architect | |



Listed by I.A.P.M.O.



SLOAN®

Sloan Valve Company
 10500 Seymour Avenue,
 Franklin Park, IL 60131
 Phone: 1-800-9-VALVE-9 (982-5839)
 or 1-847-671-4300
 Fax: 1-800-447-8329 or 1-847-671-4380
 www.sloanvalve.com

Copyright © 2011 Sloan Valve Company
 03/11 Rev. 0