


# SEMI-RIGID ALUMINUM DRYER DUCTS



- All aluminum duct is ideal for applications where code requires an all aluminum product
- Totally non combustible with a maximum operating temperature of 435°F
- The UL 2158A listed and marked class 0 version is thicker than the standard duct and incorporates new technology that allows for easy rotation and more durable handling



| Product Code | UPC Code<br>060672 | Size                         | Packaging       | Pack Qty. | Pack Wt.<br>(lbs) | Pack Cube<br>(cu. ft.) |
|--------------|--------------------|------------------------------|-----------------|-----------|-------------------|------------------------|
| MFX425X      | 137510             | 4" x 25'                     | Bulk            | 4         | 12                | 5.13                   |
| MFX42CULXZW  | 134823             | 4" x 2' with collars         | Bulk / Cut Case | 12        | 4.6               | 1.49                   |
| MFX45        | 130672             | 4" x 5'                      | Retail Bag      | 10        | 8                 | 3.14                   |
| MFX45X       | 130733             | 4" x 5'                      | Bulk            | 10        | 7                 | 3.14                   |
| MFX46C2XZW   | 132003             | 4" x 6' with collars         | Bulk / Cut Case | 16        | 13                | 5.14                   |
| MFX48        | 130689             | 4" x 8'                      | Retail Bag      | 10        | 10                | 3.14                   |
| MFX48ULXZW   | 134779             | 4" x 8' UL listed and marked | Bulk / Cut Case | 16        | 16.5              | 5.14                   |
| MFX48X       | 134670             | 4" x 8'                      | Bulk            | 10        | 10                | 3.14                   |
| MFX48XZW     | 137015             | 4" x 8'                      | Bulk / Cut Case | 16        | 13                | 5.14                   |

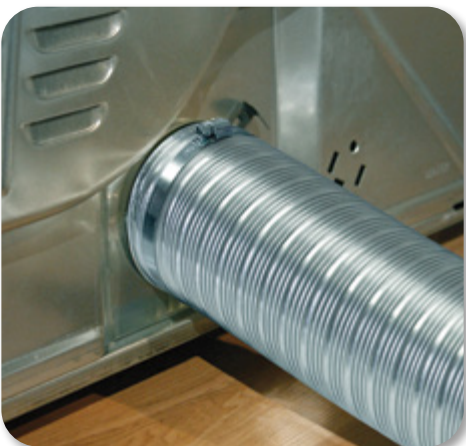

# SEMI-RIGID ALUMINUM DUCT



- All aluminum duct is ideal for applications where code requires an all aluminum product
- Totally non combustible with a maximum operating temperature of 435°F
- The UL 2158A listed and marked class 0 version is thicker than the standard duct and incorporates new technology that allows for easy rotation and more durable handling



| Product Code | UPC Code<br>060672 | Size                       | Packaging       | Pack Qty. | Pack Wt.<br>(lbs) | Pack Cube<br>(cu. ft.) |
|--------------|--------------------|----------------------------|-----------------|-----------|-------------------|------------------------|
| MFX325X      | 137503             | 3" x 25'                   | Bulk            | 5         | 11                | 5.13                   |
| MFX38        | 130702             | 3" x 8'                    | Retail Bag      | 10        | 8                 | 2.01                   |
| MFX38X       | 133680             | 3" x 8'                    | Bulk            | 10        | 8                 | 2.01                   |
| MFX38XZW     | 130702             | 3" x 8'                    | Bulk / Cut Case | 12        | 10                | 2.37                   |
| MFX42CULXZW  | 134823             | 4" x 2' with collars       | Bulk / Cut Case | 12        | 4.6               | 1.49                   |
| MFX425X      | 137510             | 4" x 25'                   | Bulk            | 4         | 12                | 5.13                   |
| MFX45        | 130672             | 4" x 5'                    | Retail Bag      | 10        | 8                 | 3.14                   |
| MFX45X       | 130733             | 4" x 5'                    | Bulk            | 10        | 7                 | 3.14                   |
| MFX46C2XZW   | 132003             | 4" x 6' with collars       | Bulk / Cut Case | 16        | 13                | 5.14                   |
| MFX48        | 130689             | 4" x 8'                    | Retail Bag      | 10        | 10                | 3.14                   |
| MFX48ULXZW   | 134779             | 4" x 8' UL listed & marked | Bulk / Cut Case | 16        | 16.5              | 5.14                   |
| MFX48X       | 134670             | 4" x 8'                    | Bulk            | 10        | 10                | 3.14                   |
| MFX48XZW     | 137015             | 4" x 8'                    | Bulk / Cut Case | 16        | 13                | 5.14                   |
| MFX58        | 135677             | 5" x 8'                    | Retail Bag      | 6         | 8                 | 2.92                   |
| MFX58X       | 135684             | 5" x 8'                    | Bulk            | 6         | 8                 | 2.92                   |
| MFX58XZW     | 130832             | 5" x 8'                    | Bulk / Cut Case | 6         | 8                 | 2.92                   |
| MFX68        | 130696             | 6" x 8'                    | Retail Bag      | 4         | 7                 | 2.79                   |
| MFX68X       | 135707             | 6" x 8'                    | Bulk            | 4         | 7                 | 2.79                   |
| MFX68XZW     | 130795             | 6" x 8'                    | Bulk / Cut Case | 4         | 7                 | 3.12                   |
| MFX78X       | 137688             | 7" x 8'                    | Bulk            | 5         | 10                | 5.18                   |
| MFX88X       | 138685             | 8" x 8'                    | Bulk            | 4         | 9                 | 5.18                   |