


**Comparison of Efficiency**

- Note:**
- The test results depend to a great extent on the hardness of the material, etc.
  - Numbers in the charts below are relative values when the capacities of Competitor "H" model are indexed at 100.
  - Chipped concrete in vertical down application using  $\phi 1.5\text{mm}$  x 50m cord reel, and measured the amount of concrete removed.


Test material:  
Concrete with compressive strength of 40N/m<sup>2</sup>

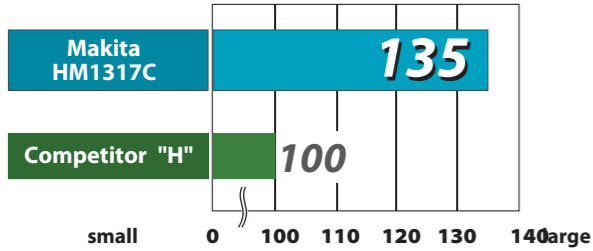

**See the Result of AVT**

**Comparison of Vibration level\* and Time to reach ELV (Exposure Limit of Vibration)\*\***

\*It is known as the tri-axial value and value at Directive of A(8).  
\*\*It means the maximum amount of vibration that an operator may be exposed to on any single day.

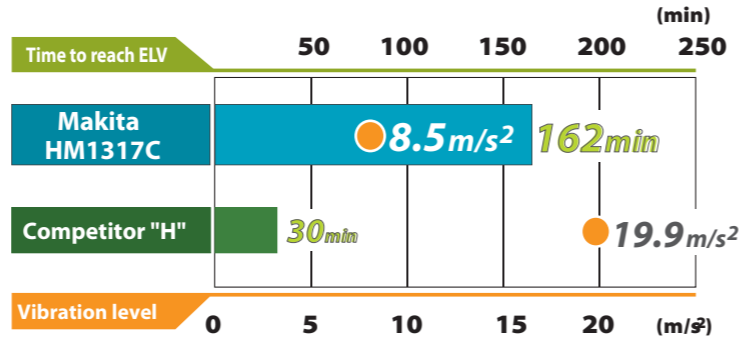

1-1/8" HEX SHANK DEMOLITION BITS			
	Size	Part No.	For Models
	<b>Bull Point</b> - For demolishing		
	16" Self-Sharpening	B-45559	
	20"	751420-A	
	<b>Flat Chisel</b> - For breaking away large chunks of concrete, chipping, channeling		
	15/16" X 20"	751220-A	
	<b>Scaling Chisel</b> - Wide chisel for chipping away scale or dried concrete splatter		
	3" X 20"	751221-A	
	<b>Clay Spade</b> - For digging in clay, shale and more		
	5-1/2" X 23-1/2"	751622-A	
	<b>Tampers</b> - For tamping operations (use with corresponding Plate)		
	15" Long	751103-A	
	<b>Tampers Plate</b>		
	6" x 6"	751710-A	HM1812 / X1 HM1810X3 HM1317CB HM1307CB
8" x 8"	751711-A		
	<b>Ground Rod Driver</b> - For driving electrical ground rods into the earth		
	1" X 15"	751102-A	
	<b>Asphalt Cutter</b> - For cutting through asphalt		
	5" X 17"	751620-A	
	<b>KeenKut Chisel</b> - Similar to flat chisel but with thicker blade for longer life		
	1-3/8" X 20"	751222-A	
	<b>Digging Chisel</b> - For digging in confined areas, channeling and more		
	3" X 22-1/2"	751621-A	
	<b>Frost Wedge</b> - For digging and breaking up frozen ground		
	1-3/4" X 24-1/2"	751223-A	
	<b>Spike / Pin Driver</b> - For driving spikes and pins such as guide anchors, tent stakes		
	1-3/4" X 18"	751101-A	
	2-1/2" X 5-1/2"	751106-A	
	(Use with Tampers Shank 751103-A)		



**42 lbs 1-1/8" Hex Demolition Hammers**

HM1317CB/ HM1307CB 1-1/8" Hex Shank



Photo: HM1317CB

**HIGH DURABILITY EXCELLENT DEMOLITION**

<b>42 lbs 1-1/8" Hex Demolition Hammers</b>		<b>HM1317CB with AVT HM1307CB</b>		
Double Insulation	Soft Start	28.6mm Hex Shank (HM1317CB/ HM1307CB)	Carrying Case	
Variable Speed				<b>HM1317CB with AVT</b>
Constant Speed				
		<b>Bit Type</b> 1-1/8" Hex <b>Blows Per Minute</b> 730 - 1,450 BPM <b>Impact Energy</b> 33.8 J (24.9 ft. lbs) <b>AMPS (120V)</b> 14.0 A <b>Overall Length</b> 32-1/2" (824 mm)		
<b>Standard Equipment:</b> 1-1/8" Hex Shank Bull Point (751420-A), Plastic Carrying Case (824897-1)				

When QUALITY & SERVICE COUNTS – Choose Makita  
makita.ca

**AVT & SOFT NO LOAD**  
ANTI VIBRATION TECHNOLOGY

HM1317CB only