

CODE NUMBER

70051015

DESCRIPTION

SU-7009 Urinal and REGAL 186 Flushometer.

COMPONENTS

Flushometer: Code 3982628Urinal: Code 1107009

DETAILS

• Flush Volume: 0.5 gpf (1.9 Lpf)

• Nominal Dimensions: 14 $\frac{3}{4}$ " × 14 $\frac{3}{16}$ " × 23 $\frac{1}{2}$ " (375 × 360 × 597mm)

FLUSHOMETER FEATURES

- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Spud Coupling and Spud Flange for 3/4" Top Spud
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Sweat Solder Adapter with Cover Tube
- Cast Wall Flange with Set Screw
- Vacuum Breaker Flush Connection

FIXTURE FEATURES

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



COMPLIANCES & CERTIFICATIONS







































(ADA Compliant, BAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, CEC Compliant, cUPC Certified, cUPC Certified (Requires use of listed vacuum breaker that complies with ASSE 1001), cUPC Green Certified, cUPC Green Certified (Requires use of listed vacuum breaker that complies with ASSE 1001), EPD, Green Globes Materials & Resources Credit, Green Globes Water Credit, HPD, LEED Materials & Resources EPD Credit, LEED Materials & Resources HPD Credit, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, UPC Certified, WaterSense Listed, WELL Building Standard)

DOWNLOADS

- Regal XL Exposed Installation Instructions
- Small Spud Urinal Installation Instructions
- Regal Flushometers Repair and Maintenance Guide
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

NOTES


All information contained within this document subject to change without notice.

WARRANTY

View Warranty Information



ROUGH-IN

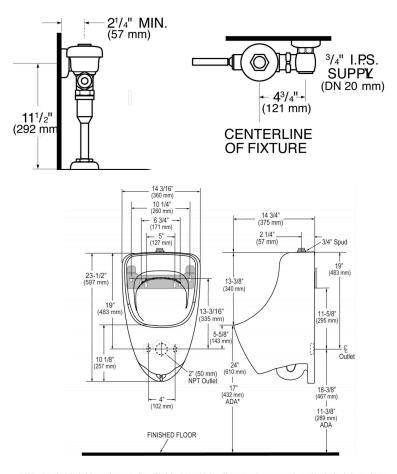

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16½" rim height or less to ensure compliance.

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com