




**Tub Spout**  
**Caño de Bañera**  
**Bec Mural**  
**Torneira para Banheira**



**GE**  
**TBG07001U**



**GC**  
**TBG08001U**



**GM**  
**TBG09001U**

**Warranty Registration and Inquiry**

For product warranty registration, TOTO U.S.A. Inc. recommends online warranty registration.  
Please visit our web site <http://www.totousa.com>.

If you have questions regarding warranty policy or coverage, please contact TOTO U.S.A. Inc., Customer Service Department, 1155 Southern Road, Morrow, GA 30260 (888) 295-8134 or (678) 466-1300 when calling from outside of U.S.A.

## TABLE OF CONTENTS

Thanks for Choosing TOTO! .....	2
Care And Cleaning .....	2
Warnings .....	2
Common Tools Needed .....	3
Before Installation .....	3
Included Parts .....	3
Installation Procedure .....	4
Warranty.....	5
Rough-In Dimensions .....	18

## THANKS FOR CHOOSING TOTO!

The mission of TOTO is to provide the world with healthy, hygienic and more comfortable lifestyles. We design every product with the balance of form and function as a guiding principle. Congratulations on your choice.

## CARE & CLEANING


Your new tub spout is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with mild soap, rinsing thoroughly with warm water and drying with a clean, soft cloth. Do not use abrasive cleaners, steel wool or harsh chemicals, as these will dull the finish. Failure to follow these instructions may void your warranty.

## WARNINGS


For safe operation of the handshower, please observe the following:

- Recommended operating pressure:
  - Minimumu pressure.....20 psi (138 kPa), dynamic
  - Maxmumu pressure.....80 psi (551kPa), static
- It is suggested to use the temperature below 140°F(60°C)
- Do not use steam for hot water supply.
- Do not use the product at an ambient temperature below 32 °F (0 °C) .

## COMMON TOOLS NEEDED



Adjustable Wrench




Sealing Tape

ENGLISH

## BEFORE INSTALLATION

- Observe all local plumbing codes.
- Make sure the water supply is shut off.
- Read these instructions carefully to ensure proper installation.
- TOTO reserves the right to update product design without notice.

## INCLUDED PARTS

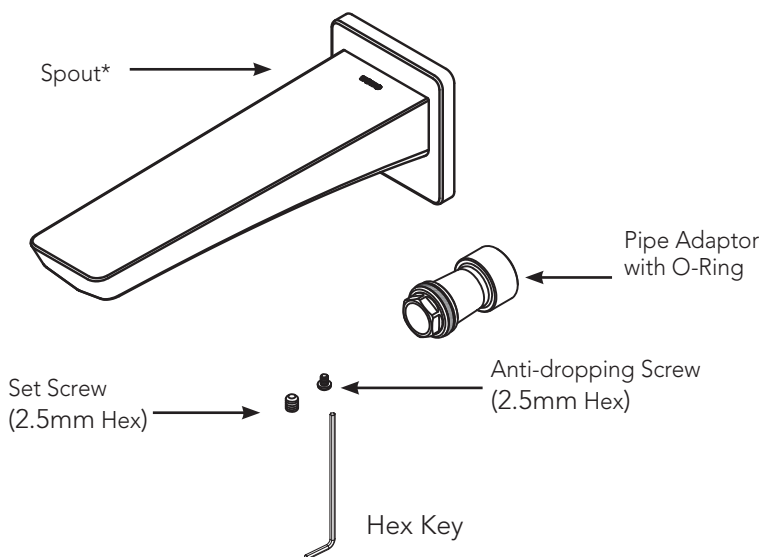

\* Actual product may vary in appearance depending on the model.

## INSTALLATION PROCEDURE

**NOTE:** Thoroughly flush the water supply line prior to installation.

### IMPORTANT!

For proper installation, a nipple with a 1/2" NPT male thread extending between 3/8" (10mm) and 3/4" (19mm) beyond the finished wall is required.

**NOTE:** The hole for the nipple should not be larger than 1" (25mm) in diameter.

1. Wrap pipe tape around the free end of the nipple, then thread the pipe adapter onto the nipple, taking care not to damage the o-ring.
2. Apply silicone caulk around the nipple where it exits the wall.
3. Slide the spout onto the pipe adapter, taking care not to damage the o-ring.
4. Remove the fixing screws and anti-dropping screws and then install the main body of the water outlet onto the fixed connector. Tighten sufficiently with the fixing screws and then lock tight the anti-dropping screws.

(After applying some soap water, etc on the O-ring of the fixed connector, it will be easier to assemble)

Please make sure that lock fixing screws and anti-dropping screws are secured, otherwise the spout body is in danger of falling.

