




Rain Shower
Ducha de Lluvia
Douche de Pluie
Chuveiro de Chuvade

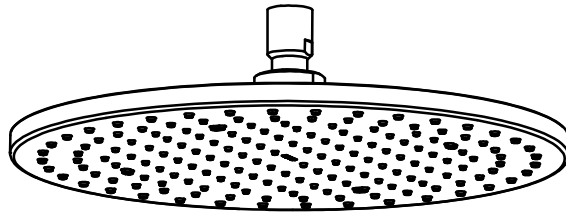

TBW07003U1 (2.5gpm)
TBW07003U4 (1.75gpm)

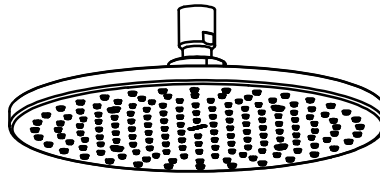

TBW07002U1 (2.5gpm)
TBW07002U4 (1.75gpm)

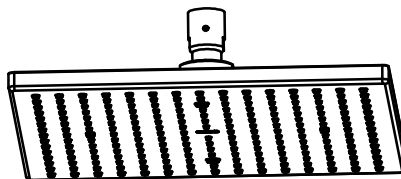

TBW08002U1 (2.5gpm)
TBW08002U4 (1.75gmp)

Warranty Registration and Inquiry

For product warranty registration, TOTO U.S.A. Inc. recommends online warranty registration. Please visit our web site <http://www.totousa.com>. If you have questions regarding warranty policy or coverage, please contact TOTO U.S.A. Inc., Customer Service Department, 1155 Southern Road, Morrow, GA 30260 (888) 295-8134 or (678) 466-1300 when calling from outside of U.S.A.

TABLE OF CONTENTS

Thanks for Choosing TOTO!..... 2
 Care & Cleaning.....2
 Warnings.....2
 Common Tools Needed.....2
 Before Installation.....3
 Installation Procedure.....3
 Warranty.....4
 Rough-in Dimensions14

THANKS FOR CHOOSING TOTO!

The mission of TOTO is to provide the world with healthy, hygienic and more comfortable lifestyles. We design every product with the balance of form and function as a guiding principle. Congratulations on your choice.

CARE & CLEANING


Your new showerhead is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with mild soap, rinsing thoroughly with warm water and drying with a clean, soft cloth. Do not use abrasive cleaners, steel wool or harsh chemicals, as these will dull the finish. Failure to follow these instructions may void your warranty. If any nozzles become clogged with mineral build up, rub gently with finger tips to clean.

WARNINGS

For safe operation, please observe the following:

- Recommended operating pressure:
 - Minimum pressure.....20 psi (138kPa), dynamic
 - Maximum pressure.....80 psi (551kPa), static
- Hot water supply temperature must not exceed 140°F(60°C).
- Do not use steam for hot water supply.
- Do not use the product at an ambient temperature below 32°F (0°C) or above 140°F (60°C).
- Do NOT install product near hot air blowers, heaters, heat lights, or any other heat source as it may damage the product. Heat sources above 140°F (60°C) placed near the product will damage the products internal and external components.


COMMON TOOLS NEEDED



Sealing tape




Screw driver



Adjustable wrench

BEFORE INSTALLATION


- Observe all local plumbing codes.
- Make sure the water supply is shut off.
- Read these instructions carefully to ensure proper installation.
- Make sure there are adequate mounting supports.
- TOTO reserves the right to update the product design without notice.
- Check to make sure you have the following parts indicated below:

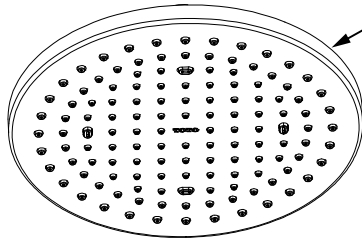

Shower head



Hex wrench
(1.5mm)




Escutcheon

(image shown is for TBW07002U*)

(image shown is for TBW07002U*)

INSTALLATION PROCEDURE

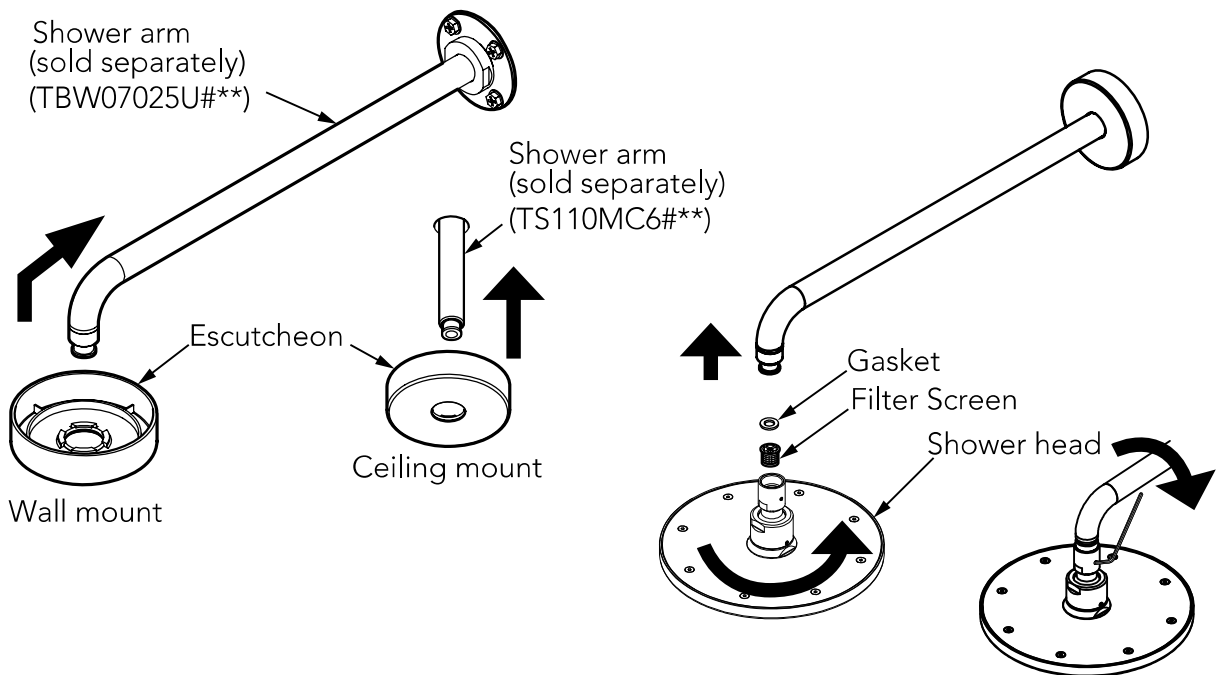

1. Slide escutcheon onto shower arm until flush to surface.
To make assembly easier, lubricate o-ring inside escutcheon with water.
2. Screw showerhead onto shower arm.
3. Tighten set screw.

CAUTION:

- Product is heavy. Make sure there is adequate mounting support prior to installation.
- Thoroughly clean and remove debris from the water supply pipe before installation to prevent clogging the spray outlet.
- To avoid leakage, do not move the showerhead after installation.