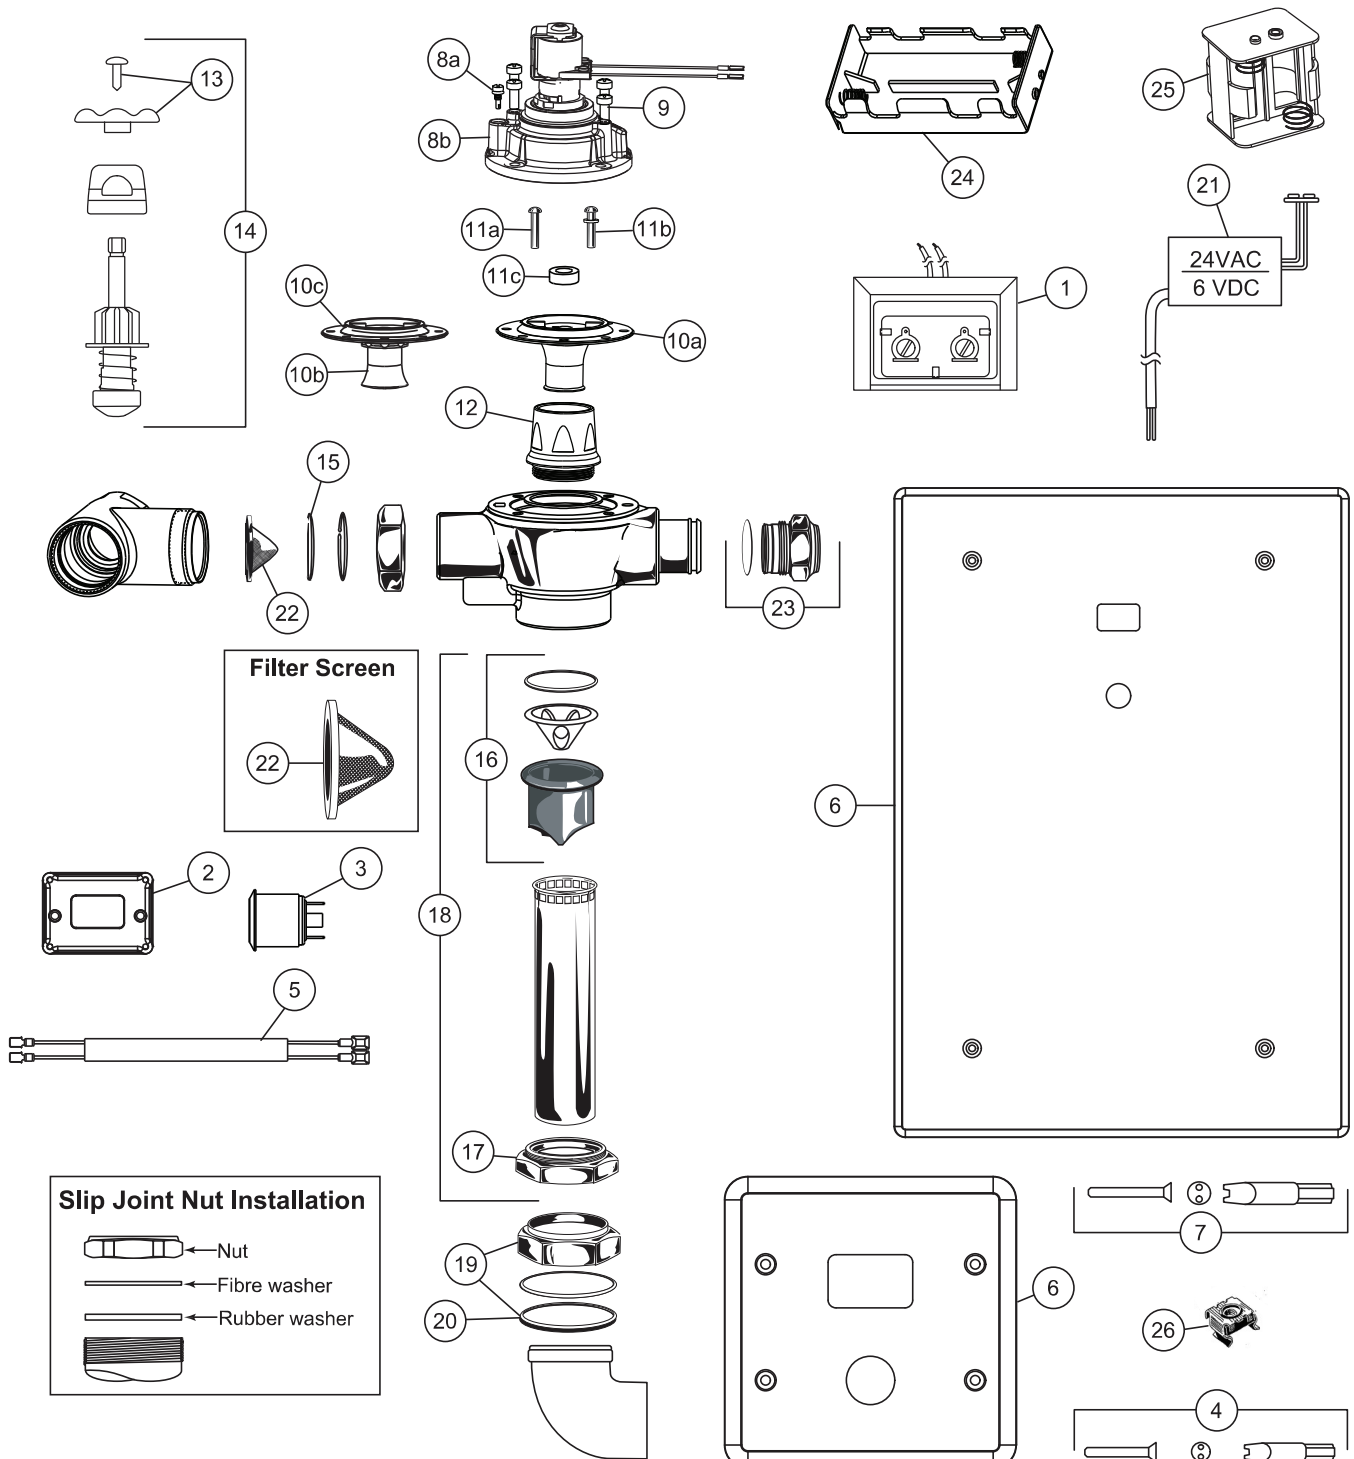




Electronic Concealed Flushvalve

160_T6____A series

Write purchase model number here for future reference



*For valves manufactured
after October 2014.*

**PLEASE LEAVE this M&I Sheet with the owner, maintenance plumber, etc as
items relating to ongoing maintenance suggestions and procedures are included.**

Item #	Part #	Description
	060799A	Universal TECK washers and O-rings repair kit
	061025A	Universal TECK parts washers and O-rings repair kit
1	060704A* 060771A*	Transformer (110 to 24 VAC) for 5 sensor modules Transformer (110 to 24 VAC) for 10 sensor modules
2	061273A ** 061272A **	Sensor module - urinal flush valve Sensor module - water closet flush valve
3	060679A	Override button assembly
4	060072A	No. 6 - 32 x 2" flat head stainless steel screws (4/pkg) and security spanner bit package for 4-1/2" (114 mm) cover
5	060680A	48" (1,220 mm) Solenoid Extension Wire
6	061244A 060674A 060675A	4-1/2" x 4-1/2" (114 mm x 114 mm) (shown) stainless steel cover with studs and screws 14" x 14" (356 mm x 356 mm) (not shown) stainless steel cover with studs and screws 14" x 20" (356 mm x 508 mm) (shown) stainless steel cover with studs and screws
7	060073A	No.10 - 32 x 2" flat head stainless steel screws (4/pkg) and security spanner bit package for 14" (356 mm) covers
8a	061024A	Regulating screw and O-ring
8b	061341A ** 061342A ** 061343A ** 061344A ** 061345A ** 061346A ** 061169A **	Cap/Solenoid & Regulating Screw Assembly for 0.5L (0.125 gal) fixed urinals (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 1.9L (0.5 gal) fixed urinals (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 4.2L (1.1 gal) fixed water closets (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 4.8L (1.27 gal) fixed water closets (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 6.0L (1.6 gal) fixed water closets (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 1.9L (0.5 gal) adjustable urinals (see Table 1) Cap/Solenoid & Regulating Screw Assembly for 6.0L (1.6 gal) adjustable water closets (see Table 1)
9	060078A	Screws for Cast Cap (4/pkg)
10a	061323A ***	Diaphragm/Guide Assembly Complete - W/C (see Table 1)
10b	061324A ***	Diaphragm Guide Assembly for Urinals (See Table 1)
10c	060079A-MMO	Diaphragm only (12/pkg)
11a	060507A	Poppet Pin Pack (3/pkg) (also see 11b) (See Table 1)
11b	060508A	Poppet Pin Pack (3/pkg) (0.5L Valves only) (See Table 1)
11c	062025A	Washer (3/pkg) (required for 6.0 & 4.8L Valves only) (See Table 1)
12	062007A ***	Brass seat with O-ring
13	060479A	Handle and screw
14	060845A	Retrofit check stem unit, capnut and handle complete
15	060082A	Adjustable Tail O-Ring Package (20/pkg)
16	060785A	Vacuum breaker sleeve complete
17	060094A	Coupling ring
18	060782A 060783A	1-1/2" x 10" (38 mm x 254 mm) V.B., coupling ring and tube complete 1-1/2" x 22-3/4" (38 mm x 578 mm) V.B., coupling ring and tube complete
19	060778A 060463A	1½" Rough Coupling Nut & Washers ¾" Coupling Nut, ¾" Washers & ¾" Spud Flange
20	060083A 060049A	1½" Slip Joint Washers (12/pkg) ¾" (19mm) Rubber and fiber washers (12/pkg)
21	060683A *	24VAC to 6VDC converter
22	060344A	Filter screen kit (12/pkg)
23	060342A	Plug and O-ring for handle end
24	060681A	Flat battery holder (4 "C" cell batteries)
25	060684A	Square battery holder (4 "C" cell batteries) - required for 4" (102 mm) box
26	060923A	Nut retainers for access box frame (12/pkg)













NOTE: Refer to TECK flushometer repair parts and maintenance manual for additional parts and information.

* Each individual sensor module requires its own 24VAC to 6VDC hardwire converter.

** For valves manufactured before October 2014, you must replace both the sensor module and the cap/solenoid which are included in; UR Kit - 061284A or WC Kit - 061285A.

*** For valves manufactured before January 2013, you must replace the sensor module and the cap/solenoid, diaphragm assembly and the brass seat with O-ring which are included in; UR Kit - 061286A or WC Kit - 061287A.

Table 1 - Cap/Pin/Diaphragm Configuration Table

	Flush Volume	Cap/Solenoid & Regulating Screw Assembly (includes Cap, Solenoid, Regulating Screw)	Poppet Pin	Diaphragm Assembly
*UR - Fixed	**0.5L (0.125 gal)	061341A 	060508A 	
	**1.9L (0.5 gal)	061342A 	060507A 	
UR - Adjustable	1.9L (0.5 gal)	061346A 		
* W/C - Fixed	**4.2L (1.1 gal)	061343A 	060507A & 062025A 	
	**4.8L (1.27 gal)	061344A 		
	6.0L (1.6 gal)	061345A 		
W/C - Adjustable	6.0L (1.6 gal)	061169A 		

NOTE: Must use all noted components listed in Table 1 to ensure correct flush volumes.

* Fixed models have epoxy in the adjustment screw.

** **WaterSense®** compliant when paired with a WaterSense fixture rated for the same flush volume.