MOEN

- · Versatile, hands-free convenience in the kitchen
- · Optimized cleaning force with PowerClean
- · Allows users to control the faucet in 4 unique ways: Handle, Sensor, Voice and Mobile App
- · Powered by 6 D alkaline batteries or optional AC adapter with power splitter (sold separately)
- · Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- · Metal construction with various finishes identified by suffix
- Duralock[™] quick connect
- · Pulldown spray with 68" braided hose
- · Control box flexible supply lines with 3/8" compression fittings
- · High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing

OPERATION

- · Lever style handle
- · Thermostatic temperature controlled by handle sensor, voice or Mobile app
- · Operates with less than 5 lbs. of force
- · Operates in stream or spray mode in the pulldown or retracted position
- · Spout rotates 100 degrees
- · WiFi enabled smart phone connectivity
- Smart phone app available for iOS and Android

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge

STANDARDS

- · Third party certified to, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- · Third party certified to meet FCC part 15 Class B
- Meets CalGreen and Georgia SB370 requirements
- · Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- · The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

16-7/8" 427mm

WARRANTY

· Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser

> 3-3/4" 95mm

· 5 year warranty electronic operation defects to the original consumer purchaser

Sensor

- · 5 year warranty against leaks, drips, finish defects if used in commercial installations
- 1 year warranty against electronic operation defects if used in commercial installations

5-3/16"

132mm

· Visit www.moen.com/support for complete details and limitations

Specifications



Cia™

Single-Handle High Arc Pulldown KitchenFaucet

MODELS: 7622EV SERIES

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.



9-3/4"

249mm

8-3/4"

221mm

3-13/16" 216mm


8-1/2" 215mm







works with the Google Assistant

Close up view of Control Box





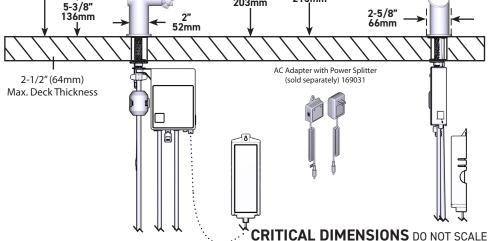

203mm