

This sleek low-profile design is the perfect statement for today's kitchens. Available in stainless steel and black stainless-steel finishes. Bright LED lighting enhances your cooking experience, while the 3-speed backlit soft touch control makes operation easy.

SIZE	STAINLESS	BLACK STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED CHARCOAL FILTERS
29-1/2 in.	BWS1304SS	BWS1304BLS (available soon)	S97018027 (set of 2)	FILTERBWPTS (set of 2)

## HVI PERFORMANCE

Duct Orientation	Size	Damper	Sones			CFM			
			Normal	Medium*	High	Normal	Medium*	High 0.25 in. w.g.	High 0.1 in. w.g.
Round - Vertical	6 in.	Included	3.0	5.5	8.5	240	350	385	400

## FEATURES

Max Blower Airflow	450 CFM
Finish	430 Stainless Steel no. 4 Brushed
Wall Mount	Yes
Telescopic Flue	Yes - Accomodates 8-ft. to 9-ft. ceilings
Convertible to non-ducted operation	Yes - Non-Duct Kit ARKBWS sold separately
Blower type	Single, Centrifugal
Cord-connected	Yes
Control type	Soft-Touch <ul style="list-style-type: none"> <li>• Blower low speed</li> <li>• Blower medium speed</li> <li>• Blower high speed</li> <li>• Light on-off</li> <li>• 5-Minute delay</li> </ul>
Lighting	2 x LED Modules 5.5 W, (included)
Grease Filters	Aluminum grease filters, dishwasher-safe with quick-release latch

## AC INPUT

120 V, 60 Hz - 2.6 AMPS

## OPTIONAL ACCESSORIES (sold separately)

Flue Extension for 10-ft. ceiling	AEBWS (stainless steel), AEBWSBLS (black stainless steel)
Non-Duct Kit	ARKBWS
Airflow Reducer (< 300 CFM)	ARP6



## MOUNTING HEIGHT

26-in. from cooktop to bottom of hood

## LIMITED WARRANTY

1-year (See installation manual for full warranty text.)

## FOR INDOOR USE ONLY

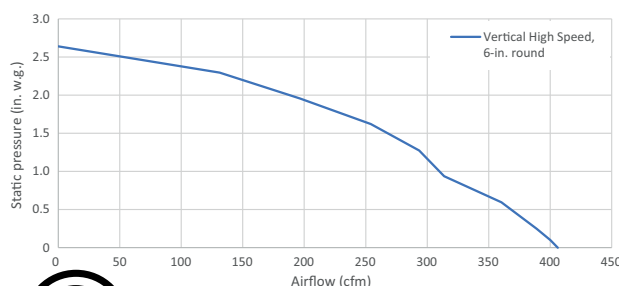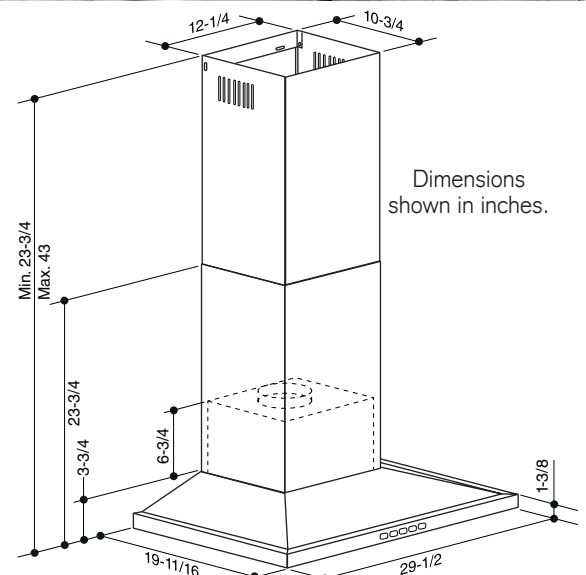

Intertek



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

\* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.

Broan-NuTone LLC  
Venmar Ventilation ULC

926 West State Street, Hartford, WI 53027  
550 Lemire Blvd., Drummondville, Québec Canada J2C 7W9

1 800-558-1711 | www.Broan-NuTone.com  
1 877-896-1119 | www.broan.ca

99529071D