


**Carbide-Tipped Saw Blades**

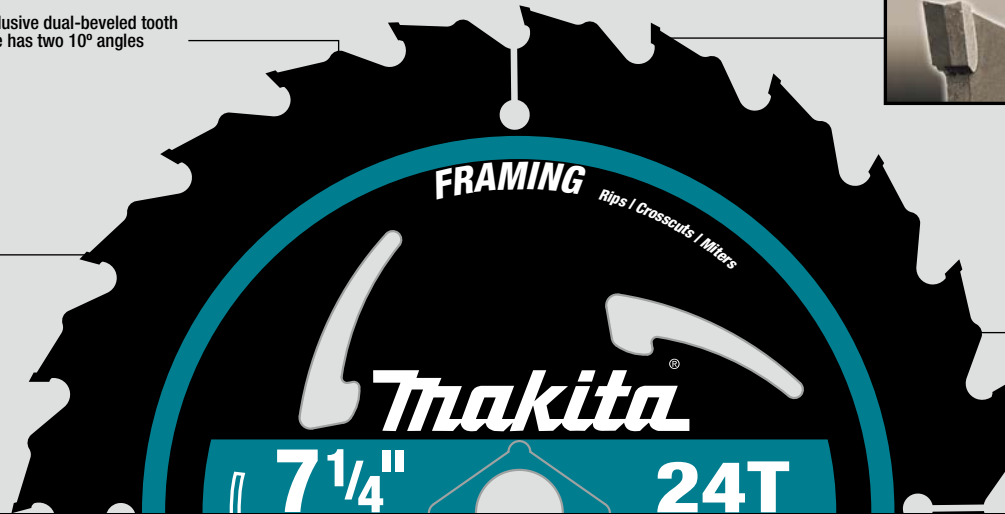

Exclusive dual-beveled tooth face has two 10° angles



High grade C-3, fine-grain tungsten carbide tips for longer durability



"M" shaped tooth has two cutting points to provide the speed of a 24 tooth with the finish of a 48 tooth


**ULTRA-COATED**

Ultra-Coated blades provide reduced pitch build-up



**General Contractor**



**Framing**



**Framing**

| Diameter | Blade Type           | No. Teeth | Arbor | Grind | Hook | Plate | Kerf  | Max. RPM | Model   | Part #               |
|----------|----------------------|-----------|-------|-------|------|-------|-------|----------|---|----------------------|
| 3-3/8"   | General Purpose      | 20T       | 15mm  | ATB   | 20°  | .028" | .039" | 2,240    |   | A-95021              |
| 3-3/8"   | General Purpose      | 24T       | 15mm  | ATB   | 24°  | .039" | .078" | 2,240    | SH01W   | 721005-A             |
| 4-3/8"   | General Purpose      | 12T       | 20mm  | ATB   | 22°  | .049" | .073" | 13,890   | 4200NH  | A-90093              |
| 4-3/8"   | General Purpose      | 24T       | 20mm  | ATB   | 10°  | .055" | .078" | 13,890   |   | 721107-6A            |
| 5-3/8"   | General Purpose      | 16T       | 5/8"  | ATAF  | 20°  | .039" | .059" | 4,500    | XSS03   | A-94904              |
| 5-1/2"   | General Purpose      | 18T       | 5/8"  | ATB   | 20°  | .055" | .078" | 10,900   | 5005BA  | 792335-0             |
| 6-1/2"   | Crosscutting         | 48T       | 20mm  | ATB   | 8°   | .062" | .087" | 9,250    | SP6000K/K1  | B-07353              |
| 6-1/2"   | General Purpose      | 16T       | 5/8"  | ATAF  | 20°  | .039" | .059" | 4,770    |   | <b>NEW</b> T-01395   |
| 6-1/2"   | General Purpose      | 24T       | 5/8"  | ATB   | 20°  | .039" | .059" | 4,770    |   | A-85092              |
| 6-1/2"   | Framing              | 24T       | 5/8"  | ATAF  | 20°  | .039" | .059" | 4,770    | XSH03, XSS01  | <b>NEW</b> T-01404   |
| 6-1/2"   | Crosscutting         | 40T       | 5/8"  | ATB   | 18°  | .039" | .063" | 4,770    |   | A-90314              |
| 6-1/2"   | General Purpose      | 40T       | 5/8"  | ATAF  | 18°  | .039" | .059" | 4,770    |   | <b>NEW</b> T-01410   |
| 7-1/4"   | General Contractor   | 16T       | 5/8"  | ATB   | 25°  | .049" | .073" | 8,300    |   | A-90009-B-10 (10/pk) |
| 7-1/4"   | General Contractor   | 24T       | 5/8"  | ATB   | 15°  | .047" | .071" | 8,300    | 5007F, 5007FA, 5007MG, 5007MGA, 5377MG, HS7600, 5477NB, XSH01 | D-45989-10 (10/pk)   |
| 7-1/4"   | Framing              | 24T       | 5/8"  | "M"   | 15°  | .047" | .071" | 8,300    |   | A-94839-10 (10/pk)   |
| 7-1/4"   | Ultra-Coated Framing | 24T       | 5/8"  | "M"   | 15°  | .047" | .071" | 8,300    |   | A-94530-10 (10/pk)   |
| 7-1/4"   | Fine Crosscutting    | 40T       | 5/8"  | ATB   | 20°  | .049" | .073" | 8,500    |   | 721251-A             |
| 8-1/4"   | Framing              | 24T       | 5/8"  | ATB   | 20°  | .051" | .078" | 5,700    | 5008MGA   | D-21521              |
| 8-1/4"   | Fine Crosscutting    | 40T       | 5/8"  | ATB   | 20°  | .055" | .079" | 5,700    |   | 792377-A             |
| 10-1/4"  | Framing              | 24T       | 5/8"  | ATB   | 20°  | .063" | .091" | 5,870    | 5104  | A-94910              |
| 16-5/16" | Beam & Timber        | 32T       | 1"    | ATB   | 20°  | .07"  | .109" | 3,500    | 5402NA  | A-90956              |
| 16-5/16" | Beam & Timber        | 60T       | 1"    | ATB   | 20°  | .078" | .109" | 3,500    |   | 792118-8             |

◀ Indicates cordless models

**2-Pc. 6-1/2" Carbide-Tipped Circular Saw Blade Set**

- Ultra-Thin Kerf carbide-tipped design provides smoother cuts with less drag on the motor and minimal material loss
- 1 ea. 16T and 24T 6-1/2" Carbide-Tipped Circular Saw Blade



| Model        | Part #             |
|--------------|--------------------|
| XSH03, XSS01 | <b>NEW</b> T-01426 |

**MNT™ Special Edition Steel Saw Blade**

| Diameter | Blade Type                | No. Teeth | Arbor | Grind | Hook | Plate | Kerf  | Max. RPM | Model   | Part #             |
|----------|---------------------------|-----------|-------|-------|------|-------|-------|----------|---|--------------------|
| 7-1/4"   | MNT™ Ultra-Coated Framing | 24T       | 5/8"  | "M"   | 15°  | .047" | .071" | 8,300    | 5007F, 5007FA, 5007MG, 5007MGA, 5377MG, HS7600, 5477NB, XSH01 | A-95928-10 (10/pk) |

The MNT™ is composed of the best soccer players around the world. They continue to be one of the top teams on the world pitch. More Details [See pg. 80](#)



Official Power Tool of the Mexican National Team™


**Steel Saw Blades**

| Diameter | Blade Type      | No. Teeth | Arbor | Grind  | Hook | Plate | Kerf  | Max. RPM | Model  | Part #   |
|----------|-----------------|-----------|-------|--------|------|-------|-------|----------|--------|----------|
| 3-3/8"   | General Purpose | 50T       | 15mm  | —      | —    | .031" | .046" | 2,240    | SH01W  | 721003-8 |
| 3-3/8"   | Thin Materials  | 50T       | 15mm  | —      | —    | .015" | .031" | 2,240    | SH01W  | 792299-8 |
| 16-5/16" | General Purpose | 50T       | 1"    | Chisel | 20°  | .062" | .093" | 2,760    | 5402NA | 792116-2 |