



Inner Core Cables

(Models C-11C, C-61C, C-131C, C-21C, C-231C)

- Vinyl-wrapped inner core to prevent core from rusting to spring – enhances cable life.
- Compression wound for strength.
- Resists kinking; negotiates tough bends and traps.
- Provides good flexibility and cleaning power to the cable end.

Cables

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
1/4" (6 mm)		50647	S-1	15' (4,6 m) with Funnel Auger	2¼	1,0
		50652	S-2	25' (7,6 m) with Funnel Auger	3½	1,6
		50657	S-3	35' (10,7 m) with Funnel Auger	5	2,2
5/8" (9 mm)		62225	C-1	25' (7,6 m) with Bulb Auger	3½	1,6
		56782	C-11C	25' (7,6 m) Inner Core w/Bulb Auger	4	1,8
		89400	C-21	50' (15,2 m) Bulb Auger	7	3,2
		56792	C-131C	35' (10,7 m) Inner Core with Bulb Auger	5½	2,5
		62235	C-2	25' (7,6 m) with Drop Head Auger	3½	1,6
		56787	C-21C	25' (7,6 m) Inner Core w/Drop Head Auger	4	1,8
		89405	C-22	50' (15,2 m) with Drop Head Auger	7	3,2
		56797	C-231C	35' (10,7 m) Inner Core with Drop Head Auger	5½	2,5
3/8" (10 mm)		62245	C-4	25' (7,6 m) with Male Coupling	4½	2,0
		62250	C-5	35' (10,7 m) with Bulb Auger	8¼	3,8
		62260	C-6	35' (10,7 m) with Male Coupling	8¼	3,8
		96037	C-61C	35' (10,7 m) Inner Core with Male Coupling	8½	4,0

Tools – Fits C-4, C-6 and C-61C Cables

	Catalog No.	Model No.	Description	Replacement Blade(s)
	62990	T-201	Straight Auger, 5' (125 mm) Long	–
	62995	T-202	Bulb Auger, 1 1/8" (30 mm) O.D.	–
	63000	T-203	Bulb Auger, 7/8" (22 mm) O.D.	–
	54837	T-204	"C" Cutter 1" (25 mm)	54832
	63005	T-205	"C" Cutter 1 1/8" (35 mm)	97835
	63010	T-206	Funnel Auger, 3" (80 mm) Long	–
	63030	T-210	Spade Cutter, 1" (25 mm)	97905
	63035	T-211	Spade Cutter, 1 1/8" (35 mm)	97825
	63040	T-212	Spade Cutter, 1 1/4" (45 mm)	92850
	63045	T-213	4-Blade Cutter, 1" (25 mm)	97795
	63050	T-214	4-Blade Cutter, 1 1/8" (35 mm)	97910
	63055	T-215	4-Blade Cutter, 1 1/4" (45 mm)	97915
	63065	T-217	Drop Head Auger, 4" (110 mm) Long	–
	55457	T-225	Retrieving Auger	–
	52812	T-230	H-D "C" Cutter, 2" (50 mm)	92815
	52817	T-231	H-D "C" Cutter, 2 1/2" (65 mm)	92820
	52822	T-232	H-D "C" Cutter, 3" (80 mm)	92835
	48482	T-250	Tool Set includes: T-203, T-205, T-210, T-217, A-13	–



K-45AF-5 shown above includes T-250 Tool Set:

- T-203 Bulb Auger.
- T-217 Drop Head Auger.
- T-205 "C" Cutter.
- A-13 Pin Key.
- T-210 Spade Cutter.



The drum front and inner drum makes changing cables quick and easy.

Accessories

Catalog No.	Model No.	Description
68917		K-45 Inner-Drum
89410	C-6429	Carrying Case
76817		C-6 Cable Kit incl. Inner Drum, C-6 Cable Torque Arm, T-250 Tool Set
98072		C-61C Cable Kit including: Inner Drum, C-61C Cable, Torque Arm, T-250 Tool Set
23908 23913	A-45AF	Drum Front and AUTOFEED® Assembly Replacement AUTOFEED® Cartridge
41937	–	RIDGID Leather Drain Cleaning Gloves
70032	–	RIDGID PVC Drain Cleaning Gloves

DRAIN CLEANING

K-40 Sink Machine

For 3/4" (20 mm) to 2 1/2" (75 mm) Drain Lines

The K-40 Sink Machine is ideal for cleaning small secondary drain lines from 3/4" (20 mm) to 2 1/2" (75 mm).

- 1/4" (6 mm) cables best for 3/4" (20 mm) to 1 1/2" (40 mm) lines.
- 5/16" (8 mm) cables best for 3/4" (20 mm) to 1 1/2" (40 mm) lines.
- 3/8" (10 mm) cables best for 1 1/2" (40 mm) to 2 1/2" (75 mm) lines.

The K-40 sits flat on the floor or countertop and also tips onto its back for easy access to sink drains and bathtubs full of water. The K-40 practically eliminates job site clean-up thanks to the patented Guide Hose two-way AUTOFEED®. It completely contains the rotating cable and eliminates any waste water splashing or spraying.

- 175 W induction motor quietly delivers enough torque to clear even the toughest blockages. Spins cable at 270 RPM.
- Premium-quality, compression-wound inner core cable combines strength and flexibility to resist kinking.
- Two-piece "twist lock" drum housing will not dent or corrode and allows easy access to the inner drum and cable.
- Special inner drum design virtually eliminates cable flip-over inside the drum and drum leakage.
- Two-way AUTOFEED® advances and retrieves the drain cleaning cable with a simple push of a lever keeping you and the work area clean. Air-actuated footswitch that allows one hand operation.
- Includes RIDGID® drain cleaning gloves and operator's manual.



Model K-40AF



Model K-40AF in vertical position

Catalog No.		Model No.	Description	Weight	
110 V (UK)	230 V*			lb.	kg
71717	71742	K-40AF	Machine with: – AUTOFEED® – Guide Hose – Mounting Bracket – C-13IC-SB, 5/16" (8 mm) x 35' (10,7 m) Speed Bump Cable w/Inner Drum	33	15

The Model K-40 makes the job easier and keeps the work site clean.



Down the sink: Press the lever and the cable feeds into the drain. Unique Guide Hose and AUTOFEED® combination keeps you right on top of the problem.



In the tub: Compact design allows easy access to hard-to-get-to areas like bathtubs and under-sink cabinets, while keeping the cable contained and away from all finished surfaces.

Cables

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
1/4" (6 mm)		50647	S-1	15' (4,6 m) with Funnel Auger	2¼	1,0
		50652	S-2	25' (7,6 m) with Funnel Auger	3½	1,6
		50657	S-3	35' (10,7 m) with Funnel Auger	5	2,2
5/16" (8 mm)		62225	C-1	25' (7,6 m) with Bulb Auger	3½	1,6
		56782	C-11C	25' (7,6 m) Inner Core with Bulb Auger	4	1,8
		89400	C-21	50' (15,2 m) with Bulb Auger	7	3,2
		56792	C-131C	35' (10,7 m) Inner Core with Bulb Auger	5½	2,5
		95847	C-131CSB	35' (10,7 m) Inner Core Speed Bump with Bulb Auger	5½	2,5
		62235	C-2	25' (7,6 m) with Drop Head Auger	3½	1,6
		56787	C-21C	25' (7,6 m) Inner Core with Drop Head Auger	4	1,8
		89405	C-22	50' (15,2 m) with Drop Head Auger	7	3,2
3/8" (10 mm)		56797	C-231C	35' (10,7 m) Inner Core with Drop Head Auger	5½	2,5
		62245	C-4	25' (7,6 m) with Male Coupling	4½	2,0
		62250	C-5	35' (10,7 m) with Bulb Auger	8¼	3,8
		62260	C-6	35' (10,7 m) with Male Coupling	8¼	3,8
		96037	C-61C	35' (10,7 m) Inner Core with Male Coupling	8½	4,0

Tools – Fits C-4, C-6 and C-61C Cables

	Catalog No.	Model No.	Description	Replacement Blade(s)
	62990	T-201	Straight Auger, 5" (125 mm) Long	—
	62995	T-202	Bulb Auger, 1½" (30 mm) O.D.	—
	63000	T-203	Bulb Auger, ¾" (22 mm) O.D.	—
	54837	T-204	"C" Cutter 1" (25 mm)	54832
	63005	T-205	"C" Cutter 1½" (35 mm)	97835
	63010	T-206	Funnel Auger, 3" (80 mm) Long	—
	63030	T-210	Spade Cutter, 1" (25 mm)	97905
	63035	T-211	Spade Cutter, 1½" (35 mm)	97825
	63040	T-212	Spade Cutter, 1¾" (45 mm)	92850
	63045	T-213	4-Blade Cutter, 1" (25 mm)	97795
	63050	T-214	4-Blade Cutter, 1½" (35 mm)	97910
	63055	T-215	4-Blade Cutter, 1¾" (45 mm)	97915
	63065	T-217	Drop Head Auger, 4" (110 mm) Long	—
	55457	T-225	Retrieving Auger	—
	52812	T-230	H-D "C" Cutter, 2" (50 mm)	92815
	52817	T-231	H-D "C" Cutter, 2½" (65 mm)	92820
	52822	T-232	H-D "C" Cutter, 3" (80 mm)	92835
	48482	T-250	Tool Set includes: T-203, T-205, T-210, T-217, A-13	—

Accessories

Catalog No.	Model No.	Description
26558	A-40G AF	AUTOFEED® Assembly & Guide Hose for K-40 includes mounting bracket
23913	—	Replacement AUTOFEED® Cartridge
71757	A-40G	Guide Hose
72702	A-40B	Mounting Bracket
71847	—	Torque Arm
68917	—	Inner Drum
76597	—	Top Roller Bearing Housing Assy.
76817	—	C-6 Cable Kit including Inner Drum, C-6 Cable, Torque Arm, T-250 Tool Set
98072	—	C-61C Cable Kit including Inner Drum, C-61C Cable, Torque Arm, T-250 Tool Set
41937	—	RIDGID Leather Drain Cleaning Gloves
70032	—	RIDGID PVC Drain Cleaning Gloves

DRAIN CLEANING

K-400 Drum Machine



Model K-400 with AUTOFEED®

For 1½" (40 mm) to 4" (110 mm) Drain Lines

The K-400 offers several unique, user-friendly features to make the toughest drain cleaning jobs easier and hassle-free.

- ¾" (10 mm) cable best for 1½" (40 mm) to 3" (90 mm) lines.
- ½" (12 mm) cable best for 3" (90 mm) to 4" (110 mm) lines.

Designed with a sleek profile, the Model K-400 is a great fit for drain cleaners, service plumbers, facility and institutional maintenance departments and property management companies and features:

- Integrated Transport Cart allows for easy movement to and from the job site. Heavy-duty, large wheels easily navigate over bumps and up stairs.
- Integrated Telescoping Handle provides high-handle height during transport.
- Cable Control System causes the drum to stop spinning when the blade becomes lodged in a blockage, limits potential for cable to flip-over in the drum and helps to indicate to operator when blockages are encountered.
- Use of a tough ¾" (10 mm) or ½" (12 mm) Integral Wound (IW) "Solid Core" cable that is rugged and kink-resistant.
- AUTOFEED® offered as an option. This patented, automatic cable feed powers the cable in and out of the drain. Reverse the direction of the AUTOFEED® and the cable feeds back into the drum.

Specifications

- Drum Capacity: 100' (30,5 m) of ¾" (10 mm) Diameter Cable or 75' (22,5 m) of ½" (12 mm) Diameter Cable.
- Motor: 380 W, 230 V motor spins cable at 165 RPM.
- Weight (Machine Only): 45 lbs. (20,4 kg).
- Dimensions: Length 21" (53 cm) 24" (61 cm) with AUTOFEED®, Height 23" (58,5 cm) Width 17" (43,2 cm).


All Model K-400 machines are supplied with RIDGID® drain cleaning gloves, operator's manual and instructional video.

Catalog No.	Model No.	Description	Weight	
			lb.	kg
27028	K-400 w/ C-32 IW	K-400 Machine w/RIDGID Drain Cleaning Gloves – C-32 IW ¾" (10 mm) x 75' (23 m) Solid Core (Integral Wound) Cable – T-260 Tool Set Includes: – T-202 Bulb Auger – T-205 "C" Cutter – T-211 Spade Cutter – A-13 Pin Key	68	31
28098	K-400 AF w/C-32 IW	K-400 Machine w/RIDGID Drain Cleaning Gloves – AUTOFEED® – C-32 IW ¾" (10 mm) x 75' (23 m) Solid Core (Integral Wound) Cable – T-260 Tool Set	79	36
27033	K-400 w/ C-45 IW	K-400 Machine w/RIDGID Drain Cleaning Gloves – C-45 IW ½" (12 mm) x 75' (23 m) Solid Core (Integral Wound) Cable – T-260 Tool Set	81	37
28103	K-400 AF w/C-45 IW	K-400 Machine w/RIDGID Drain Cleaning Gloves – AUTOFEED® – C-45 IW ½" (12 mm) x 75' (23 m) Solid Core (Integral Wound) Cable – T-260 Tool Set	93	42

DRAIN CLEANING



Model K-400

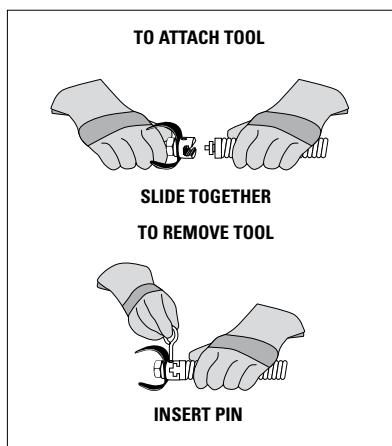

For C-4, C-6, C-6IC, C-7, C-8, C-9, C-10, C-11, C-12, C-14, C-15, C-31, C-32, C-33, C-44, C-45, and C-46 & all IW Cables.

IW (Integral Wound) Solid Core Cables

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
$\frac{3}{8}$ " (10 mm)		87577	C-31IW	50' (15 m) IW Cable	18	8,2
		87582	C-32IW	75' (23 m) IW Cable	26	11,8
		87587	C-33IW	100' (30 m) IW Cable	34	15,4
		91037	—	Repair End for $\frac{3}{8}$ " (10 mm) IW Cable	0.5	0,2
$\frac{1}{2}$ " (12 mm)		87592	C-44IW	50' (15 m) IW Cable	27	12,2
		87597	C-45IW	75' (23 m) IW Cable	39	17,7
		91042	—	Repair End for $\frac{1}{2}$ " (12 mm) IW Cable	0.6	0,3

Tools – Fits C-31IW, C-32IW, C-33IW, C-44IW and C-45IW

	Catalog No.	Model No.	Description	Replacement Blade(s)
	62990	T-201	Straight Auger, 5" (125 mm) Long	—
	62995	T-202	Bulb Auger, 1 $\frac{1}{8}$ " (30 mm) O.D.	—
	63000	T-203	Bulb Auger $\frac{7}{8}$ " (22 mm) O.D.	—
	63005	T-205	"C" Cutter, 1 $\frac{3}{8}$ " (35 mm)	97835
	63010	T-206	Funnel Auger, 3" (80 mm) Long	—
	63015	T-207	Spiral Cutter, 1 $\frac{1}{4}$ " (32 mm)	97840
	63020	T-208	Spiral Cutter, 1 $\frac{1}{2}$ " (40 mm)	97895
	63025	T-209	Spiral Cutter, 2" (50 mm)	97900
	63030	T-210	Spade Cutter, 1" (25 mm)	97905
	63035	T-211	Spade Cutter, 1 $\frac{3}{8}$ " (35 mm)	97825
	63040	T-212	Spade Cutter, 1 $\frac{3}{4}$ " (45 mm)	92850
	63045	T-213	4-Blade Cutter, 1" (25 mm)	97795
	63050	T-214	4-Blade Cutter, 1 $\frac{3}{8}$ " (35 mm)	97910
	63055	T-215	4-Blade Cutter, 1 $\frac{3}{4}$ " (45 mm)	97915
	63060	T-216	Chain Knocker, 2" (50 mm)	98000
	63065	T-217	Drop Head, 4" (110 mm) Long	—
	49002	T-260	Tool Set [$\frac{3}{8}$ " (10 mm)- K-400] Includes: – T-202 Bulb Auger – T-205 "C" Cutter – T-211 Spade Cutter – A-13 Pin Key	—

Accessories

	Catalog No.	Model No.	Description	Weight	
				lb.	kg
	41937	—	RIDGID Drain Cleaning Gloves, Leather	$\frac{1}{2}$	0,2
	70032	—	RIDGID PVC Drain Cleaning Gloves	$\frac{1}{2}$	0,2
	59230	A-13	Pin Key for $\frac{3}{8}$ " and $\frac{1}{2}$ " Cable	—	—
	52343	—	K-400 AUTOFEED® Assembly	2	0,9
	27048	—	K-400 Drum Assembly	10	4,5
	92607	—	$\frac{3}{8}$ " x $\frac{1}{2}$ " Tool Adaptor	$\frac{1}{2}$	0,2
	92682	—	$\frac{3}{8}$ " x $\frac{1}{2}$ " Drop Head Adaptor	$\frac{1}{2}$	0,2
	92687	—	Coupling $\frac{1}{2}$ " Drop Head Tool	$\frac{1}{2}$	0,2
	26778	—	Guide Hose	2	0,9
	51317	C-9	Trap Leader	5	2,2

DRAIN CLEANING

K-3800 Drum Machine

For 3/4" (20 mm) to 4" (110 mm) Drain Lines

The K-3800 is a powerful, easy to transport, versatile Drum machine for cleaning indoor drains. Requires minimal setup to clean sink lines, floor drains and roof vents and features:

- Rugged, corrosion-resistant molded cable drum that won't dent or rust. The drum tilt adjusts for proper cable feed angle. Inner-drum guards against cable flip-over inside the drum.
- Cable drum quick release and built-in hand-holds allow easy cable change and transport.
- Maximum drum capacity is 100' (30,5 m) of 3/8" (10 mm) or 90' (27 m) of 1/2" (12 mm) continuous length cable:
 - 3/8" (10 mm) cable best for 1 1/2" (40 mm) to 3" (75 mm) lines up to 100' (30,5 m).
 - 1/2" (12 mm) cable best for 2" (50 mm) to 4" (110 mm) lines up to 90' (27 m).
- Optional sink drum holds up to 50' (15 m) of 5/16" (8 mm) or 1/4" (6 mm) cable.
 - Ideal for cleaning through 3/4" (20 mm) to 1 1/2" (40 mm) sink traps.
- Powerful 175 W Universal Motor spins cable at 240 RPM. When cable hits blockage, motor gears down automatically to deliver more power and enhance operator control.
- Tools connect to cable in seconds
- Includes a heavy-duty AUTOFEED® system (all modes except machine only).
- Includes RIDGID® leather drain cleaning gloves and operator's manual.



The optional Transport Cart to mount K-3800 for easy transport to the jobsite

Accessories


	Catalog No.	Model No.	Description	Weight	
				lb.	kg
	55002	A-380	Standard Drum for 3/8" (10 mm), 1/2" (12 mm) Cable	12 1/2	5,6
	55007	A-381	Sink Drum for 5/16" (8 mm), 1/4" (6 mm) Cable	12 1/2	5,6
	55012	A-381-A	Sink Drum with 25' (7,6 m) x 5/16" (8 mm) IC Cable w/ Bulb Head	16 1/2	7,5
	41937	—	RIDGID Drain Cleaning Gloves, Leather	1/2	0,2
	70032	—	RIDGID Drain Cleaning Gloves, PVC	1/2	0,2
	59230	A-13	Pin Key For 3/8" (10 mm) Cable	1/2	0,2
	59225	A-12	Pin Key For 1/2" (12 mm) Cable	1/2	0,2
	55017	—	Transport Cart	18	8,2
	60087	A3800 PF	AUTOFEED® Assembly	7 3/8	3,3
	62412	—	Guide Hose Adapter for Sink Drum	3 1/2	1,6

Catalog No.	Model No.	Description	Weight	
61502	K-3800	K-3800 Machine w/RIDGID Gloves	42	19,0
61482	K-3800 w/C-32	K-3800 Machine with: – AUTOFEED® – C-32, 3/8" (10 mm) x 75' (23 m) Cable – T-202 Bulb Auger – T-205 "C" Cutter – T-211 Spade Cutter – A-13 Pin Key – RIDGID Leather Drain Cleaning Gloves	71	32,2
61487	K-3800 w/C-45	K-3800 Machine with: – AUTOFEED® – C-45, 1/2" (12 mm) x 75' (23 m) Cable – T-102 Funnel Auger – T-142 Knife Blade Cutter – T-107 Spade Cutter – A-12 Pin Key – RIDGID Leather Drain Cleaning Gloves	83	37,7

DRAIN CLEANING

Inner Core (IC) Cables

Good flexibility and more cleaning power to the cable end.

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
$\frac{3}{8}$ " (10 mm)		37842	C-31	50' (15 m) IC Cable	18	8,2
		37847	C-32	75' (23 m) IC Cable	26	11,8
		37852	C-33	100' (30 m) IC Cable	34	15,4
		51752	T-122	Repair End	1	0,5
$\frac{1}{2}$ " (12 mm)		37857	C-44	50' (15 m) IC Cable	27	12,2
		37862	C-45	75' (23 m) IC Cable	39	17,7
		37867	C-45HC	75' (23 m) Hollow Core Cable	38	17,2
		55467	C-46	90' (28 m) IC Cable	47	21,2
		59917	T-121	Repair End	$\frac{3}{4}$	0,8

Integral Wound (IW) Cables


Wound tighter on the inner core creating a solid assembly.

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
$\frac{3}{8}$ " (10 mm)		87577	C-31IW	50' (15 m) IW Cable	18	8,2
		87582	C-32IW	75' (23 m) IW Cable	26	11,8
		87587	C-33IW	100' (30 m) IW Cable	34	15,4
		91037	—	Repair End for IW Cable	$\frac{1}{2}$	0,2
$\frac{1}{2}$ " (12 mm)		87592	C-44IW	50' (15 m) IW Cable	18	8,2
		87597	C-45IW	75' (23 m) IW Cable	26	11,8
		91042	—	Repair End for $\frac{1}{2}$ " (12 mm) IW Cable	$\frac{3}{4}$	0,3

Sink Drum Cables

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
$\frac{1}{4}$ " (6 mm)		50652	S-2	25' (7,6 m) w/Funnel Auger	3 $\frac{1}{2}$	1,6
		50657	S-3	35' (10,7 m) w/Funnel Auger	5	2,2
$\frac{5}{16}$ " (8 mm)		56782	C-11C	25' (7,6 m) Inner Core w/Bulb Auger	4	1,8
		56792	C-13IC	35' (10,7 m) with Bulb Auger	5 $\frac{1}{2}$	2,5
		56787	C-21C	25' (7,6 m) Inner Core w/Drop Head Auger	4	1,8
		56797	C-23IC	35' (10,7 m) with Drop Head Auger	5 $\frac{1}{2}$	2,5

TO ATTACH TOOL



SLIDE TOGETHER

TO REMOVE TOOL



INSERT PIN

For C-4, C-6, C-6IC, C-7, C-8, C-9, C-10, C-11, C-12, C-14, C-15, C-31, C-32, C-33, C-44, C-45, and C-46 & all IW Cables.

Tools Fit $\frac{3}{8}$ " (10 mm) IC, $\frac{3}{8}$ " (10 mm) IW and $\frac{1}{2}$ " (12 mm) IW Cables

C-31, C-32, C-33, C-31IW, C-32IW, C-33IW, C-44IW and C-45IW

	Catalog No.	Model No.	Description	Repl. Blade(s)
	62990	T-201	Straight Auger, 5" (125 mm) Long	—
	62995	T-202	Bulb Auger, 1 $\frac{1}{8}$ " (29 mm) O.D.	—
	63000	T-203	Bulb Auger $\frac{7}{8}$ " (22 mm) O.D.	—
	54837	T-204	"C" Cutter, 1" (25 mm)	54832
	63005	T-205	"C" Cutter, 1 $\frac{3}{8}$ " (35 mm)	97835
	63010	T-206	Funnel Auger, 3" (75 mm) Long	—
	63015	T-207	Spiral Cutter, 1 $\frac{1}{4}$ " (32 mm)	97840
	63020	T-208	Spiral Cutter, 1 $\frac{1}{2}$ " (40 mm)	97895
	63025	T-209	Spiral Cutter, 2" (50 mm)	97900
	63030	T-210	Spade Cutter, 1" (25 mm)	97905
	63035	T-211	Spade Cutter, 1 $\frac{3}{8}$ " (35 mm)	97825
	63040	T-212	Spade Cutter, 1 $\frac{3}{4}$ " (45 mm)	92850
	63045	T-213	4-Blade Cutter, 1" (25 mm)	97795
	63050	T-214	4-Blade Cutter, 1 $\frac{3}{8}$ " (35 mm)	97910
	63055	T-215	4-Blade Cutter, 1 $\frac{3}{4}$ " (45 mm)	97915
	63060	T-216	Chain Knocker, 2" (50 mm)	98000
	63065	T-217	Drop Head, 4" Long (110 mm)	—
	49002	T-260	Tool Set Includes: — T-202 Bulb Auger — T-205 "C" Cutter — T-211 Spade Cutter — A-13 Pin Key	—

Tools Fit $\frac{1}{2}$ " (12 mm) IC Cables

C-44, C-45 and C-46

	Catalog No.	Model No.	Description	Repl. Blade(s)
	62850	T-101	Straight Auger	—
	62855	T-102	Funnel Auger	—
	62865	T-104	"H" Cutter, 2 $\frac{1}{2}$ " (65 mm)	97800
	62870	T-105	Grease Cutter, 2 $\frac{1}{2}$ " (65 mm)	97920
	62875	T-106	Grease Cutter 3 $\frac{1}{2}$ " (87 mm)	97925
	62880	T-107	Spade Cutter, 1 $\frac{3}{4}$ " (45 mm)	92850
	62930	T-112	4-Blade Cutter, 1 $\frac{3}{4}$ " (45 mm)	97915
	62935	T-113	4-Blade Cutter, 3" (75 mm)	97910
	62940	T-114	Chain Knocker	97985
	54842	T-141	Knife Blade Cutter, 1 $\frac{1}{2}$ " (40 mm)	54847
	54852	T-142	Knife Blade Cutter, 2 $\frac{1}{2}$ " (65 mm)	97800
	54992	T-270	Tool Set: — T-102 Funnel Auger — T-142 Knife Blade Cutter — T-107 Spade Cutter — A-12 Pin Key	—
	92687		Drop Head Tool Adaptor $\frac{1}{2}$ " (12 mm)	—

DRAIN CLEANING

K-750 Drum Machine



Cable advance



Cable retract



Model K-750 with C-100 shown above

For 3" (90 mm) to 8" (200 mm) Drain/Sewer Lines

The K-750 Drum Machine is a powerful, self-contained machine ideal for lateral lines. Easy to transport, minimal set-up; attach a tool and go.

- AUTOFEED® advances and retrieves cable with a push of a lever, up to 20' (6 m) per minute.
- Versatile AUTOFEED® control adjusts for either 5/8" (16 mm) or 3/4" (20 mm) cable with a twist of a screwdriver.
 - Recommend 5/8" (16 mm) cable for 3" (90 mm) to 6" (150 mm) drain lines up to 150' (48 m).
 - Recommend 3/4" (20 mm) cable for 4" (110 mm) to 8" (200 mm) drain lines up to 200' (62 m).
- Cable spins at 200 RPM.
- Tough, corrosion-resistant cable drum withstands harsh treatment and abuse. It will not dent or corrode and cleans easily.
- Drum holds 100' (30,5 m) of 3/4" (20 mm) or 125' (35 m) of 5/8" (16 mm) cable and is designed for quick, easy removal.
- Well-balanced design gives machine a lightweight "feel." Transport wheels ease loading into service truck/van.
- Equipped with 550 W induction motor.
- Includes RIDGID® PVC drain cleaning gloves and operator's manual.

Standard 3/4" (20 mm) Tool Set Includes:

- T-406 Spade Cutter.
- T-407 Retrieving Auger.
- T-411 2" (50 mm) Cutter.
- T-413 3" (90 mm) Cutter.
- T-414 4" (110 mm) Cutter.

Standard 5/8" (16 mm) Tool Set Includes:

- T-403 3" (90 mm) P-Trap Cutter.
- T-407 Retrieving Auger.
- T-406 Spade Cutter.
- T-411 2" (50 mm) Cutter.
- T-413 3" (90 mm) Cutter.

Machine Options - AUTOFEED®

Catalog No.	Model No.	Description	Weight	
			lb.	kg.
44152	K-750 w/C-75	Machine with RIDGID PVC Drain Cleaning Gloves, 230 V, AUTOFEED®, Standard 3/4" (20 mm) Tool Set and: C-75, 75' x 3/4", (23 m x 20 mm) Cable	206	93,6
44157	K-750 w/C-100	Machine with RIDGID PVC Drain Cleaning Gloves, 230 V, AUTOFEED®, Standard 3/4" (20 mm) Tool Set, and: C-100, 100' x 3/4", (30 m x 20 mm) Cable	234	106,3
44162	K-750 w/C-27	Machine with RIDGID PVC Drain Cleaning Gloves, 230 V, AUTOFEED®, Standard 5/8" (16 mm) Tool Set, and: C-27, 75' x 5/8", (23 m x 16 mm) Cable	182	82,7
44147	K-750	230 V, 50 Hz Machine with RIDGID PVC Drain Cleaning Gloves, 230 V, 3/4" Pigtail	104	47,3


DRAIN CLEANING

Inner Core (IC) Cables


Good flexibility and more cleaning power to the cable end.

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
$\frac{5}{8}$ " (16 mm)		92460	C-25	25' IC Cable (7,6 m)	24	10,9
		92465	C-26	50' IC Cable (15,2 m)	43	19,5
		92470	C-27	75' IC Cable (23 m)	63	28,6
		43647	C-24	100' IC Cable (30,5 m)	84	38,1
$\frac{3}{4}$ " (20 mm)		92475	C-28	25' IC Cable (7,6 m)	30	13,9
		92480	C-29	50' IC Cable (15,2 m)	60	27,2
		41212	C-75	75' IC Cable (23 m)	93	42,5
		41697	C-100	100' IC Cable (30,5 m)	122	55,3

Hollow Core Cables


		Catalog No.	Model No.	Description	Weight	
					lb.	kg
$\frac{5}{8}$ " (16 mm)		32737	C-27HC	75' HC Cable (23 m)	52¾	23,9
		58192	C-24HC	100' HC Cable (30,5 m)	70½	32,1
$\frac{3}{4}$ " (20 mm)		47427	C-75HC	75' HC Cable (23 m)	75	34,0
		47432	C-100HC	100' HC Cable (30,5 m)	100	45,5

Leaders and Pig Tails

	Catalog No.	Model No.	Description	Weight	
				lb.	kg
	92555	T-458	$\frac{5}{8}$ " (16 mm) x 2' (50 mm) Leader	2	0,85
	92560	T-468	$\frac{3}{4}$ " (20 mm) x 2' (50 mm) Leader	2¾	1,25
	44122	—	$\frac{5}{8}$ " (16 mm) Pigtail, 4½" (114 mm) Long	2½	1,13
	44117	—	$\frac{3}{4}$ " (20 mm) Pigtail, 6" (150 mm) Long	3½	1,59

QUICK-CONNECT CABLE & TOOLS

Rotate pin one-half turn in either direction to quickly add cable or tools:

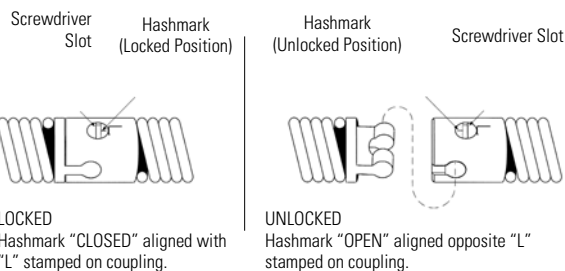

Coupling features stainless steel pin and spring; eliminates need for punches, stands, or expansion pins.

For C-24, C-25, C-26, C-27, C-28, C-29, C-75, C-100, C-27HC, C-24HC, C-75HC, and C-100HC.


Tools and Replacement Blades – Fit $\frac{5}{8}$ " (16 mm) and $\frac{3}{4}$ " (20 mm) Cables

C-24, C-25, C-26, C-27, C-28, C-29, C-75, C-100, C-27HC, C-24HC, C-75HC and C-100HC

	Catalog No.	Model No.	Description	Replacement	
				Blade(s)	Holder
	92485	T-403	P-Trap Cutter, 3" (75 mm)	92835	92900
	92490	T-404	P-Trap Cutter, 3½" (87 mm)	92840	92900
	92495	T-406	Spade Cutter, 1¾" (45 mm)	92850	92915
	92500	T-407	Retrieving Auger 2¾" (65 mm)	—	—
	92505	T-408	Sawtooth Cutter, 3" (75 mm)	92890	92915
	51762	T-409	H-D Bulb Auger, 1¾" (45 mm)	—	—
	92510	T-411	Double Cutter, 2" (50 mm)	92815	92905
	92515	T-412	Double Cutter, 2½" (65 mm)	92820	92905
	92520	T-413	Double Cutter, 3" (75 mm)	92825	92910
	92525	T-414	Double Cutter, 4" (110 mm)	92830	92910
	92530	T-416	Double Cutter, 6" (150 mm)	92855	92910
	92535	T-432	3-Blade Cutter 2" (50 mm)	92860	92895
	92540	T-433	3-Blade Cutter 3" (75 mm)	92865	92895
	92545	T-434	3-Blade Cutter 4" (110 mm)	92870	92895
	92550	T-436	3-Blade Cutter 6" (150 mm)	92875	92895

Accessories

	Catalog No.	Model No.	Description	Weight	
				lb.	kg
	43637	T-458	Drum Assembly w/ $\frac{5}{8}$ " (16 mm) Pigtail	33	15
	41982	T-468	Drum Assembly w/ $\frac{3}{4}$ " (20 mm) Pigtail	37½	17,0
	43642	—	AUTOFEED® Assembly	8	3,5
	41992	—	C-100IC Kit w/Tools, $\frac{3}{4}$ " (20 mm) x 100' (30,5 m)		
	49032	—	Front Guide Hose Assembly	3	1,3
	46015	E-453	Allen Wrench	—	—
	41937	—	RIDGID Leather Drain Cleaning Gloves	½	0,2
	70032	—	RIDGID PVC Drain Cleaning Gloves	½	0,2
	59360	A-3	Tool Box	5	2,3
				oz.	g
	31487	A-7570	$\frac{5}{8}$ " (16 mm) Repair Splicer	1½	43
	92805	A-6582	$\frac{5}{8}$ " (16 mm) Male Coupling	1	28
	92810	A-6583	$\frac{5}{8}$ " (16 mm) Female Coupling	2	57
	31492	A-7571	$\frac{3}{4}$ " (20 mm) Repair Splicer	2	57
	92880	B-6840	$\frac{3}{4}$ " (20 mm) Male Coupling	1	28
	92885	B-6841	$\frac{3}{4}$ " (20 mm) Female Coupling	2	57

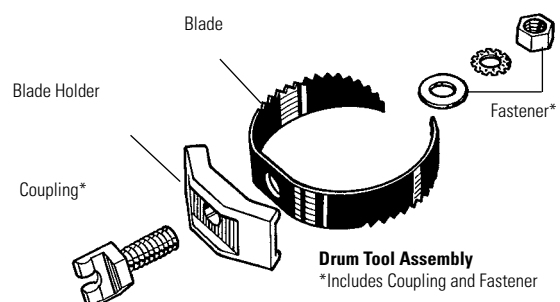

DRAIN CLEANING

K-7500 Drum Machine



Standard Accessories

T-406 – Spade Cutter.
T-407 – Retrieving Auger.
T-411 – 2" (50 mm) Double Cutter.
T-413 – 3" (75 mm) Double Cutter.
T-414B – 4" (110 mm) Double Cutter - (Blade only).
T-416B – 6" (150 mm) Double Cutter - (Blade only).
T-408 – Sawtooth Cutter.
T-403 – 3" (75 mm) P-Trap Cutter.
T-468 – 3/4" (20 mm) Flexible Leader.
Tool Box, Hex Key, RIDGID® PVC Drain
Cleaning Gloves.

For 5/8" (16 mm) machine package (Catalog No. 61512), the T-468 Leader is replaced with the T-458 Leader and the 6" (150 mm) Double Cutter Blade is eliminated.

For 3" (90 mm) to 10" (250 mm) Lines

The K-7500 Drum machine offers the performance, cable control, durability, and maneuverability demanded by professional users. Ideal for any tough job, such as roots – up to 250' (76 m).

- Recommend 5/8" (16 mm) cable for 3" (75 mm) to 6" (150 mm) drain lines up to 250' (76 m).
- Recommend 3/4" (20 mm) cable for 4" (110 mm) to 10" (250 mm) drain lines up to 250' (76 m).
- Cable spins at 200 RPM.
- Powerful, yet quiet, 600 W universal motor and gearbox bear down as cutter engages tough obstructions.
 - Provides audible and visual signals to operator.
- Inner-drum and ball bearing distributor arm work with motor/gearbox system to reduce chance of cable flip-over inside the drum.
- Main and inner drums won't rust, split or dent – ever, and clean easily for professional appearance. Main drum holds up to 100' (30,5 m) of 3/4" (20 mm) cable or 125' (38 m) of 5/8" (16 mm) cable.
- Powerful AUTOFEED® mechanism has grease fittings and an open design for easy maintenance; advances and retrieves cable up to 22' (6,7 m) per minute.
- Two position stair climber eases transport and loading – eliminates extra cost for loading wheels.
- Narrow profile allows machine to fit through bathroom doors.
- Handles adjust to desired height to ensure balanced transport.
- Includes RIDGID® PVC drain cleaning gloves and operator's manual.

Machine Options – Power Feed

Catalog No.	Model No.	Description	Weight	
			lb.	kg
220-240V				
61542	K-7500	Machine w/3/4" (20 mm) Pigtail and Standard Accessories	150	86,2
61522	K-7500	Machine w/5/8" (16 mm) Pigtail and Standard Accessories	149	67,8
61512	K-7500 w/C-24	Machine, Standard Accessories, and 5/8" (16 mm) x 100' (30,5 m) Inner Core Cable	233	106
61517	K-7500 w/C-100	Machine, Standard Accessories, and 3/4" (20 mm) x 100' (30,5 m) Inner Core Cable	272	123,7


Cable Control & Performance – When Tool Engages Tough Obstructions

Cable contracts towards inner drum.

- Provides additional strength.
- Further protection against cable flip over inside the drum.

Under high torque

Under normal operating conditions



Motor slows while power builds.

- Visual & audible signals indicate torque increase.
- Reduced drum speed provides greater control.

Cable engages compound bend guide tube.

- Retards cable flip over inside the drum.

Inner Core (IC) Cables

Good flexibility and more cleaning power to the cable end.

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
5/8" (16 mm)		92460	C-25	25' IC Cable (7,6 m)	24	10,9
		92465	C-26	50' IC Cable (15,2 m)	43	19,5
		92470	C-27	75' IC Cable (22,9 m)	63	28,6
		43647	C-24	100' IC Cable (30,5 m)	84	38,1
3/4" (20 mm)		92475	C-28	25' IC Cable (7,6 m)	30	13,9
		92480	C-29	50' IC Cable (15,2 m)	60	27,2
		41212	C-75	75' IC Cable (22,9 m)	93	42,5
		41697	C-100	100' IC Cable (30,5 m)	122	55,3

Hollow Core Cables

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
5/8" (16 mm)		32737	C-27HC	75' HC Cable (23 m)	52 3/4	23,9
		58192	C-24HC	100' HC Cable (30,5 m)	70 1/2	32,1
3/4" (20 mm)		47427	C-75HC	75' HC Cable (23 m)	75	34,0
		47432	C-100HC	100' HC Cable (30,5 m)	100	45,5

Leaders and Pig Tails

	Catalog No.	Model No.	Description	Weight	
				lb.	kg
	92555	T-458	5/8" (16 mm) x 2' (50 mm) Leader	2	0,85
	92560	T-468	3/4" (20 mm) x 2' (50 mm) Leader	2 3/4	1,25
	44122	—	5/8" (16 mm) Pigtail, 4 1/2" (114 mm) Long	2 1/2	1,13
	44117	—	3/4" (20 mm) Pigtail, 6" (150 mm) Long	3 1/2	1,59

Tools and Replacement Blades – Fit 5/8" (16 mm) and 3/4" (20 mm) Cables

C-24, C-25, C-26, C-27, C-28, C-29, C-75, C-100, C-27HC, C-24HC, C-75HC and C-100HC

	Catalog No.	Model No.	Description	Replacement	
				Blade(s)	Holder
	92485	T-403	P-Trap Cutter, 3" (75 mm)	92835	92900
	92490	T-404	P-Trap Cutter, 3 1/2" (87 mm)	92840	92900
	92495	T-406	Spade Cutter, 1 3/4" (45 mm)	92850	92915
	92500	T-407	Retrieving Auger 2 5/8" (65 mm)	—	—
	92505	T-408	Sawtooth Cutter, 3" (75 mm)	92890	92915
	51762	T-409	H-D Bulb Auger, 1 3/4" (45 mm)	—	—
	92510	T-411	Double Cutter, 2" (50 mm)	92815	92905
	92515	T-412	Double Cutter, 2 1/2" (65 mm)	92820	92905
	92520	T-413	Double Cutter, 3" (75 mm)	92825	92910
	92525	T-414	Double Cutter, 4" (110 mm)	92830	92910
	92530	T-416	Double Cutter, 6" (150 mm)	92855	92910
	92535	T-432	3-Blade Cutter 2" (50 mm)	92860	92895
	92540	T-433	3-Blade Cutter 3" (75 mm)	92865	92895
	92545	T-434	3-Blade Cutter 4" (110 mm)	92870	92895
	92550	T-436	3-Blade Cutter 6" (150 mm)	92875	92895

Accessories

	Catalog No.	Model No.	Description	Weight	
				lb.	kg
	60042	A-7534D	Drum Assembly w/ 3/4" (20 mm) Pigtail	31	14
	61107	A-7558D	Drum Assembly w/ 5/8" (16 mm) Pigtail	30	13,6
	60047	A-75DR	Drum Only	20	9
	60032	A-75PF	AUTOFEED® Assembly	10	4,5
	60037	—	AUTOFEED® Spacers	—	—
	41992	—	C-100 IC Kit w/Tools 3/4" (20 mm) x 100' (30,5 m)	—	—
	49032	—	Front Guide Hose Assembly	3	1,3
	41937	—	RIDGID Leather Drain Cleaning Gloves	1/2	0,2
	70032	—	RIDGID PVC Drain Cleaning Gloves	1/2	0,2
	59360	A-3	Tool Box	5	2,3
				oz.	g
	31487	A-7570	5/8" (16 mm) Repair Splicer	1 1/2	43
	92805	A-6582	5/8" (16 mm) Male Coupling	1	28
	92810	A-6583	5/8" (16 mm) Female Coupling	2	57
	31492	A-7571	3/4" (20 mm) Repair Splicer	2	57
	92880	B-6840	3/4" (20 mm) Male Coupling	1	28
	92885	B-6841	3/4" (20 mm) Female Coupling	2	57

QUICK-CONNECT CABLE & TOOLS

Rotate pin one-half turn in either direction to quickly add cable or tools: Screwdriver Slot

Screwdriver Slot

Hashmark (Locked Position)



LOCKED Hashmark "CLOSED" aligned with "L" stamped on coupling.

Coupling features stainless steel pin and spring; eliminates need for punches, stands, or expansion pins.

Hashmark (Unlocked Position)



UNLOCKED Hashmark "OPEN" aligned opposite "L" stamped on coupling.

DRAIN CLEANING

K-50 Sectional Machine



For 3/4" (20 mm) to 4" (110 mm) Drain Lines

The K-50 Sectional Machine is a compact, versatile, professional's machine. Capable of running three different cable sizes: 5/16" (8 mm), 3/8" (10 mm) and 5/8" (16 mm). The perfect, all-round sink, shower and floor drain machine, weighing less than 40 lbs (18 kg).

- Unique, easy-to-use, instant-acting cable clutch maximizes operator control:
 - Pull handle down and cable spins at 400 RPM.
 - Release handle, cable stops instantly.
- Uses sections of 5/8" (16 mm) cable, cleans 1 1/4" (32 mm) to 4" (110 mm) lines up to 100' (30 m).
 - C-8 best for 1 1/2" (40 mm) - 3" (90 mm) drains.
 - C-9 best for 2" (50 mm) - 4" (110 mm) drains.
- Equipped with an A-17 adapter, runs up to 50' (15 m) of 5/16" (8 mm) or 35' (11 m) of 3/8" (10 mm) continuous length cable.
 - 5/16" (8 mm) best for 3/4" (20 mm) to 1 1/2" (40 mm) lines.
 - 3/8" (10 mm) best for 1 1/2" (40 mm) to 2" (50 mm) lines.
- Equipped with 300 W motor.
- Includes A-1 RIDGID® drain cleaning mitt and operator's manual.



Machine Options

Catalog No.	Model No.	Description	Weight	
			lb.	kg
11971	K-50	Machine with A-1 RIDGID drain cleaning mitt	37	16,8
11981	K-50-6	Machine, with: – A-17-A Adapter – A-30 Cable Kit	67	30,4
11991	K-50-7	Machine, with: – A-17-B adapter – A-30 cable kit	74	33,6
12001	K-50-8	Machine, with: – A-17-A Adapter – A-17-B Adapter – A-30 Cable Kit	67	30,4

Model K-50-8 includes:

- K-50 Machine.
- A-17-A, Adapter includes: 25' (7,6 m) x 5/16" (8 mm) C-1 Bulb Auger Cable.
- A-17-B, Adapter includes: 35' (10,7 m) x 3/8" (10 mm) C-5 Bulb Auger Cable.
- A-1 RIDGID Drain Cleaning Mitt.

A-30 Cable Kit Includes:

- Six Sections C-8, 7 1/2' (2,3 m) x 5/8" (16 mm) Cable [45' (13,7 m)].
- A-10 Cable Carrier.
- T-201 Straight Auger.
- T-202 Bulb Auger.
- T-205 "C" Cutter.
- T-211 Spade Cutter.
- A-13 Coupling Pin Key.
- A-14-6 Rear Guide Hose.
- A-1 Left-Hand RIDGID Drain Cleaning Mitt.



DRAIN CLEANING


Cables

		Catalog No.	Model No.	Description	Weight	
					lb.	kg
 Bulb Auger		62225	C-1	25' (7,6 m) with Bulb Auger	3½	1,6
		56782	C-1IC	25' (7,6 m) Inner Core w/Bulb Auger	4	1,8
		89400	C-21	50' (15,2 m) with Bulb Auger	7	3,2
		62235	C-2	25' (7,6 m) with Drop Head Auger	3½	1,6
		56787	C-2IC	25' (7,6 m) Inner Core with Drop Head Auger	4	1,8
		89405	C-22	50' (15,2 m) with Drop Head Auger	7	3,2
  		62245	C-4	25' (7,6 m) w/ Male Coupling	4½	2,0
		62250	C-5	35' (10,7 m) w/ Bulb Auger	8¼	3,8
		62260	C-6	35' (10,7 m) w/ Male Coupling	8¼	3,8
		96037	C-6IC	35' (10,7 m) IC w/ Male Coupling	8½	4,0
	Sectional	62265	C-7	7½' (2,3 m) Tight-Wind	4	1,8
		62270	C-8	7½' (2,3 m) All-Purpose Wind	3	1,4
		51317	C-9	10' (3,1 m) Heavy-Duty Wind	4¾	2,1

Cable Kits

Catalog No.	Model No.	Cable	Tools & Accessories	Weight	
				lb.	kg
59365	A-30	Six Sections: C-8, ¾" x 7½' (45', 13,7 m)	T-201 Straight Auger T-202 Bulb Auger T-205 "C" Cutter T-211 Spade Cutter A-13 Coupling Pin Key A-10 Cable Carrier A-14-6 Rear Guide Hose A-1 Left-Hand RIDGID Drain Cleaning Mitt	20	9,1
59370	A-30TW	Six Sections: C-7, ¾" x 7½' (45', 13,7 m) Tight-Wind	Same as A-30	30	13,6
52962	A-40	Six Sections: C-9, ¾" x 10' (60', 18,3 m)	T-206 Funnel Auger T-215 4-Blade Cutter T-231 "C" Cutter A-13 Coupling Pin Key A-10 Cable Carrier A-14-10 Rear Guide Hose A-1 Left-Hand RIDGID Drain Cleaning Mitt	37	16,8

Adapters

	Catalog No.	Model No.	Description	Weight	
				lb.	kg
	59250	A-17-A	Adapter With 25' (7,6 m) x 5/16" (8 mm) Cable w/Bulb Auger	8	3,6
	59255	A-17-B	Adapter With 35' (10,7 m) x 3/8" (10 mm) Cable w/Bulb Auger	13	5,9

Accessories

	Catalog No.	Model No.	Description	Weight	
				lb.	kg
	59235	A-14-6	6' (1,8 m) Rear Guide Hose	5	2,3
	84325	A-14-10	10' (3 m) Rear Guide Hose	7	3,2
	59270	A-18	Front Guide Hose Assembly	9	4,1
	59210	A-10	Cable Carrier Holds 90' (27 m) C-8, C-9	3¼	1,5
	59205	A-1	Left-Hand RIDGID Drain Cleaning Mitt	½	0,2
	59295	A-2	Right-Hand RIDGID Drain Cleaning Mitt	½	0,2
	59230	A-13	Pin Key For 5/8" (16 mm) Cable	⅛	0,1
	59450	A-3179	K-50 Jaw Set	1½	0,7

Tools – Fits ¾" (10 mm) and 5/8" (16 mm) cables

C-4, C-6, C-7, C-8 and C-9

	Catalog No.	Model No.	Description	Replacement Blade(s)
	62990	T-201	Straight Auger, 5" (125 mm) Long	—
	62067	T-201A	Straight Flex Auger	—
	62995	T-202	Bulb Auger, 1½" (28 mm) O.D.	—
	63000	T-203	Bulb Auger, ¾" (22 mm) O.D.	—
	54837	T-204	"C" Cutter 1" (25 mm)	54832
	63005	T-205	"C" Cutter 1½" (35 mm)	97835
	63010	T-206	Funnel Auger, 3' (75 mm) Long	—
	63015	T-207	Spiral Cutter, 1¼" (32 mm)	97840
	63020	T-208	Spiral Cutter, 1½" (40 mm)	97895
	63025	T-209	Spiral Cutter, 2" (50 mm)	97900
	63030	T-210	Spade Cutter, 1" (25 mm)	97905
	63035	T-211	Spade Cutter, 1½" (35 mm)	97825
	63040	T-212	Spade Cutter, 1¾" (44 mm)	92850
	63045	T-213	4-Blade Cutter, 1" (25 mm)	97795
	63050	T-214	4-Blade Cutter, 1½" (35 mm)	97910
	63055	T-215	4-Blade Cutter, 1¾" (44 mm)	97915
	63060	T-216	Chain Knocker, 2" (50 mm)	98000
	63065	T-217	Drop Head, 4" (110 mm) Long	—
	63280	T-218	Flue Brush, 3" (75 mm)	—
	63070	T-219	Flue Brush, 2½" (65 mm)	—
	63080	T-220	Flue Brush, 2" (50 mm)	—
	63220	T-221	Flue Brush, 1½" (40 mm)	—
	55457	T-225	Retrieving Auger	—
	52812	T-230	H-D "C" Cutter, 2" (50 mm)	92815
	52817	T-231	H-D "C" Cutter, 2½" (65 mm)	92820
	52822	T-232	H-D "C" Cutter, 3" (75 mm)	92835
	48482	T-250	Tool Set includes: T-203, T-205, T-210, T-217, A-13	—